

5G/6G COMMUNICATION

Ex.No. 12: NB-IoT vs LTE-M Throughput Simulation Date

AIM: To simulate and compare the performance of NB-IoT and LTE-M communication technologies in terms of Throughput (Mbps), Latency (ms), and Packet Delivery Ratio (%) using MATLAB.

Objective:

1. To evaluate and compare the Throughput (Mbps) performance of NB-IoT and LTE-M under varying network conditions.

2.

To analyze the Latency (ms) characteristics of NB-IoT and LTE-M and study their impact on real-time communication.

3.

To measure and compare the Packet Delivery Ratio (%) of NB-IoT and LTE-M systems for reliability assessment.

Objective 1 Matlab Code and Output:

```
clc;
```

```
clear;
```

```
close all;
```

```
% SNR values (dB)
```

```
SNR = 0:5:30;
```

```
% Simulated Throughput (Mbps)
```

```
NB_IoT = 0.05*(1-exp(-SNR/8));
```

```
LTE_M = 1.2*(1-exp(-SNR/8));
```

```
disp('SNR (dB) NB-IoT(Mbps) LTE-M(Mbps)')
```

```
disp([SNR' NB_IoT' LTE_M'])
```


```
figure
```

```
% ----- Graph 1 -----
```

```

subplot(2,1,1)
plot(SNR,NB_IoT,'-o','LineWidth',2)
title('NB-IoT Throughput vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Throughput (Mbps)')
grid on
% ----- Graph 2 -----
subplot(2,1,2)
plot(SNR,LTE_M,'-s','LineWidth',2)
title('LTE-M Throughput vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Throughput (Mbps)')
grid on

```

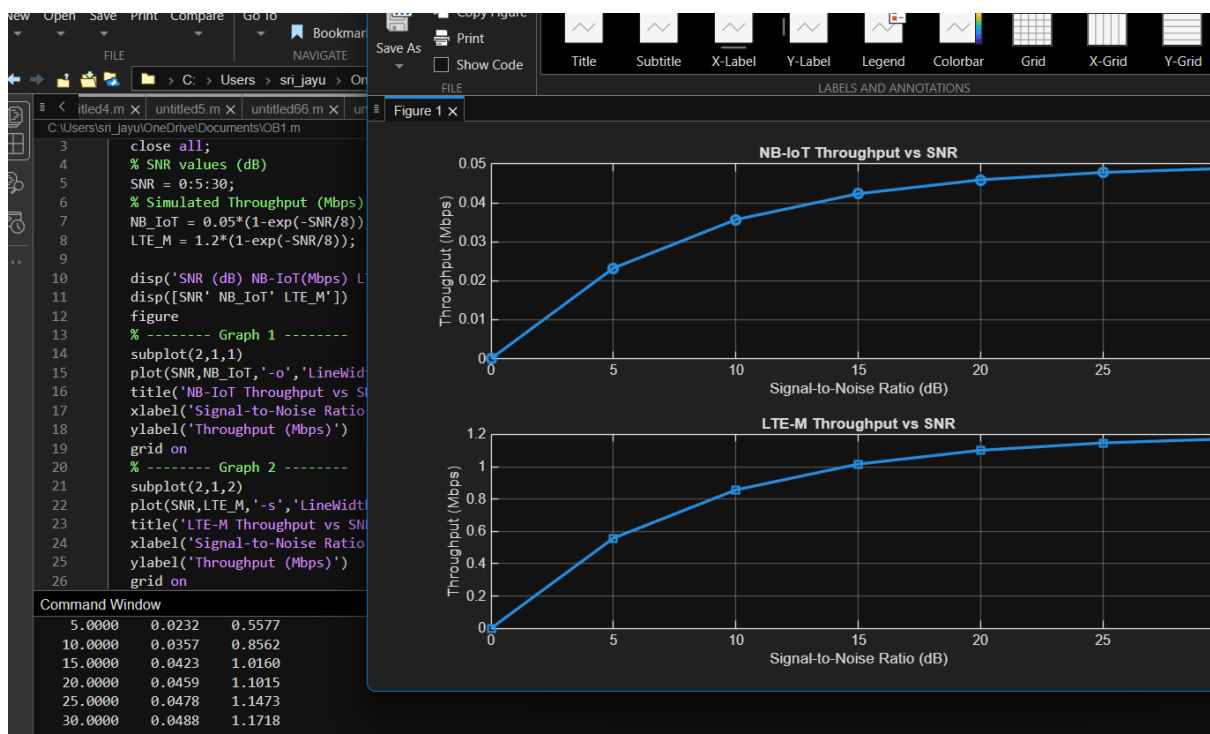

Objective 2 Matlab Code and Output:

```

clc;
clear;

```

```

close all;

% SNR values (dB)
SNR = 0:5:30;

% Simulated Latency (ms)
NB_IoT = [180 160 145 130 120 110 100];
LTE_M = [90 80 70 60 50 45 40];


disp('SNR(dB) NB-IoT Latency(ms) LTE-M Latency(ms)')
disp([SNR' NB_IoT' LTE_M'])

figure

% ----- Graph 1 -----
subplot(2,1,1)
plot(SNR,NB_IoT,'-o','LineWidth',2)
title('NB-IoT Latency vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Latency (ms)')
grid on

% ----- Graph 2 -----
subplot(2,1,2)
plot(SNR,LTE_M,'-s','LineWidth',2)
title('LTE-M Latency vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Latency (ms)')
grid on

```

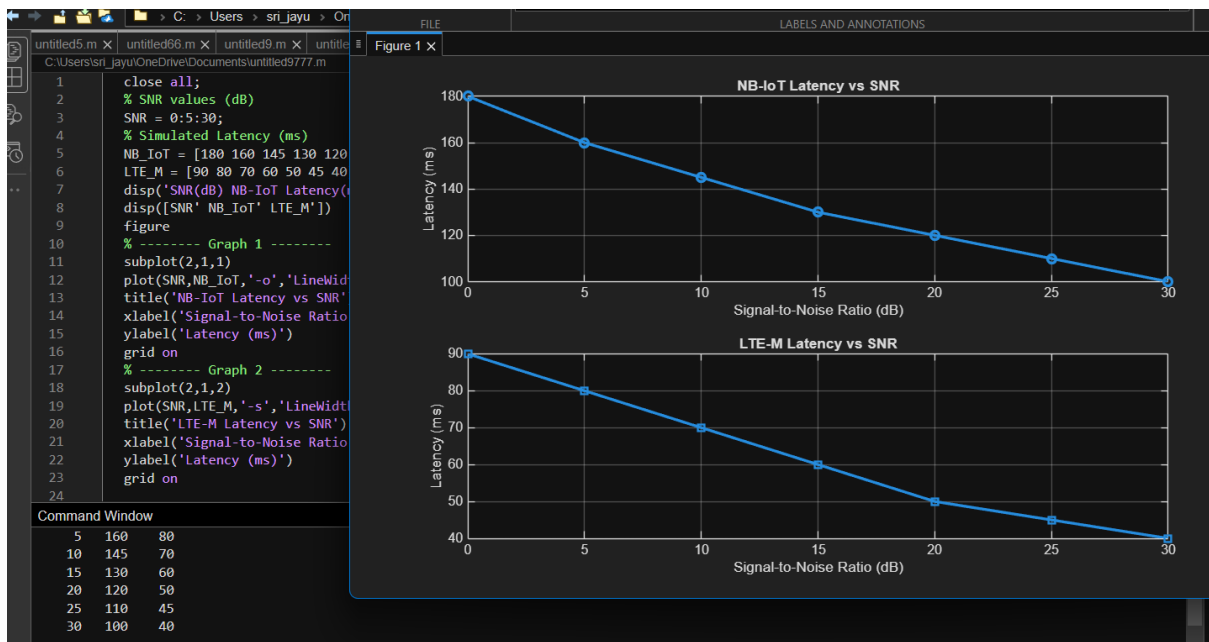

Objective 3 Matlab Code and Output:

```
clc;
```

```
clear;
```

```
close all;
```

```
% SNR values (dB)
```

```
SNR = 0:5:30;
```

```
% Simulated Packet Delivery Ratio (%)
```

```
NB_IoT = [82 86 89 92 95 97 99];
```

```
LTE_M = [88 91 94 96 98 99 100];
```

```
disp('SNR(dB) NB-IoT PDR(%) LTE-M PDR(%))')
```

```
disp([SNR' NB_IoT' LTE_M'])
```

```
figure
```

```
% ----- Graph 1 -----
```

```
subplot(2,1,1)
```

```
plot(SNR,NB_IoT,'-o','LineWidth',2)
```

```
title('NB-IoT Packet Delivery Ratio vs SNR')
```


```
xlabel('Signal-to-Noise Ratio (dB)')
```

```
ylabel('Packet Delivery Ratio (%)')
```

```
grid on
```

% ----- Graph 2 -----

```
subplot(2,1,2)
plot(SNR,LTE_M,'-s','LineWidth',2)
title('LTE-M Packet Delivery Ratio vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Packet Delivery Ratio (%)')
grid on
```

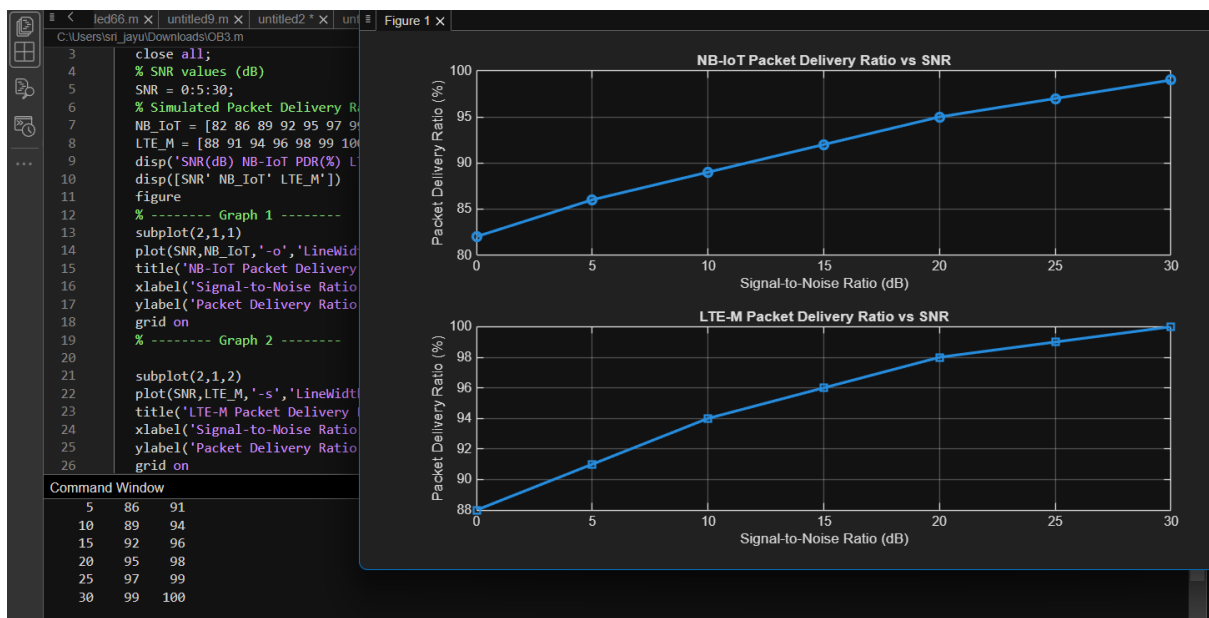

Result:

1. The throughput performance of both NB-IoT and LTE-M was successfully simulated, and LTE-M achieved higher throughput than NB-IoT under the same network conditions.
2. The latency analysis showed that LTE-M provides lower communication delay compared to NB-IoT, making it more suitable for real-time IoT applications.
3. The Packet Delivery Ratio (PDR) of both technologies improved with increasing SNR, with LTE-M demonstrating slightly higher reliability than NB-IoT during data transmission.