
ARCHIBALD | INTEGRATED C1 ENCODER INTERFACE

REVIEW DRAFT 0.2 — NOT FOR FABRICATION

Replaces stock AUX2 connectors; processor connections pass through retained R26 / R27.

C: PC4 UART TX / PA11 BiSS clock
D: PB7 UART RX / BiSS data

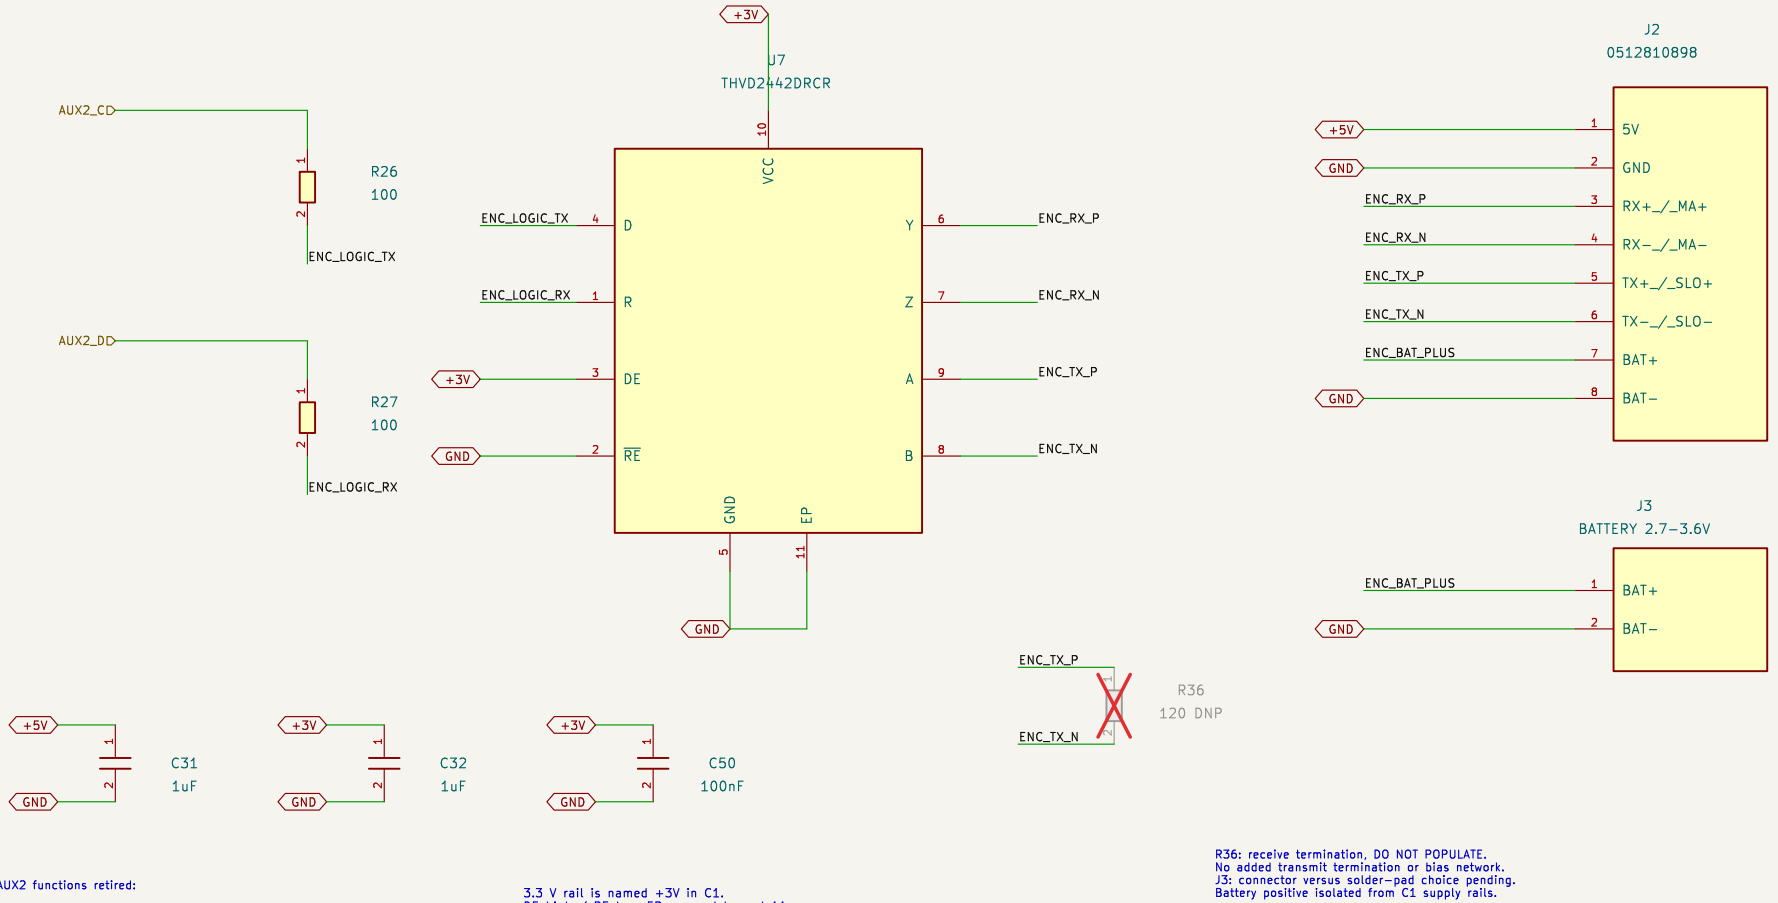

Unused AUX2 functions retired:

AUX2_AD
AUX2_BD
AUX2_I2C_PULLUP

3.3 V rail is named +3V in C1.
DE high / RE low; EP mapped to pad 11.
U7 footprint and FPC contact orientation: review.

R36: receive termination, DO NOT POPULATE.
No added transmit termination or bias network.
J3: connector versus solder-pad choice pending.
Battery positive isolated from C1 supply rails.

Reference: Stephen Bell, Flux Riser Board Design, 2026-10-03. Power/load and signal-integrity review still required.
C50 replaces Flux C3; U7 replaces Flux U1; J2 replaces Flux J1; R36 replaces Flux R1. PCB integration not performed.

Title: C1 encoder integration — review only	
mjbots Robotic Systems, LLC	
Rev: DRAFT 0.2	Id: 11/14