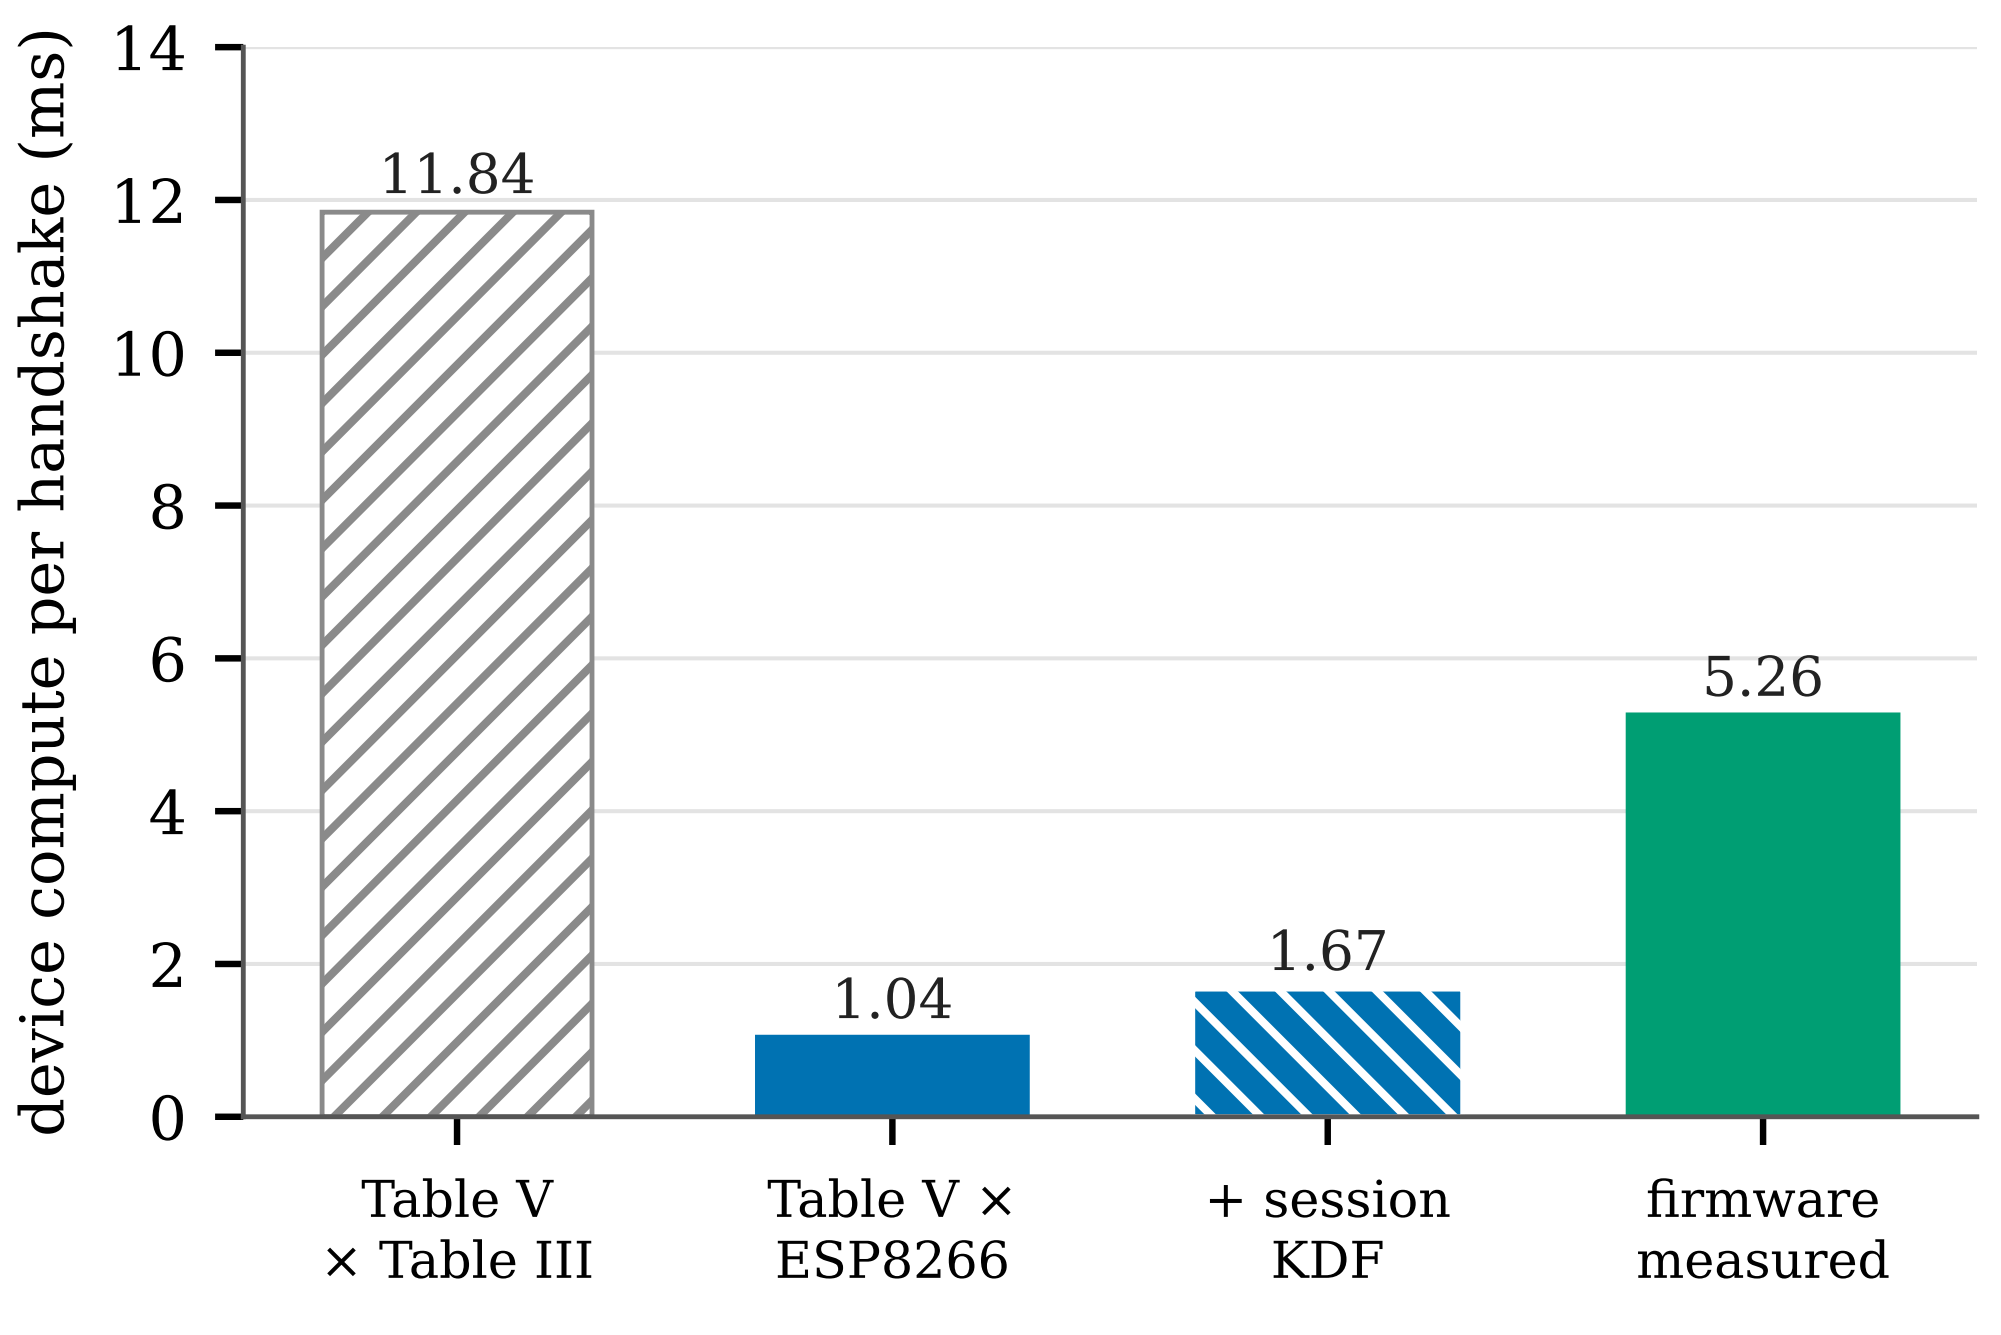
device compute per handshake (ms)
14
12
10
8
6
4
2
0
11.84
1.04
1.67
5.26
Table V
× Table III
Table V ×
ESP8266
+ session
KDF
firmware
measured