


CoLiDo X5060

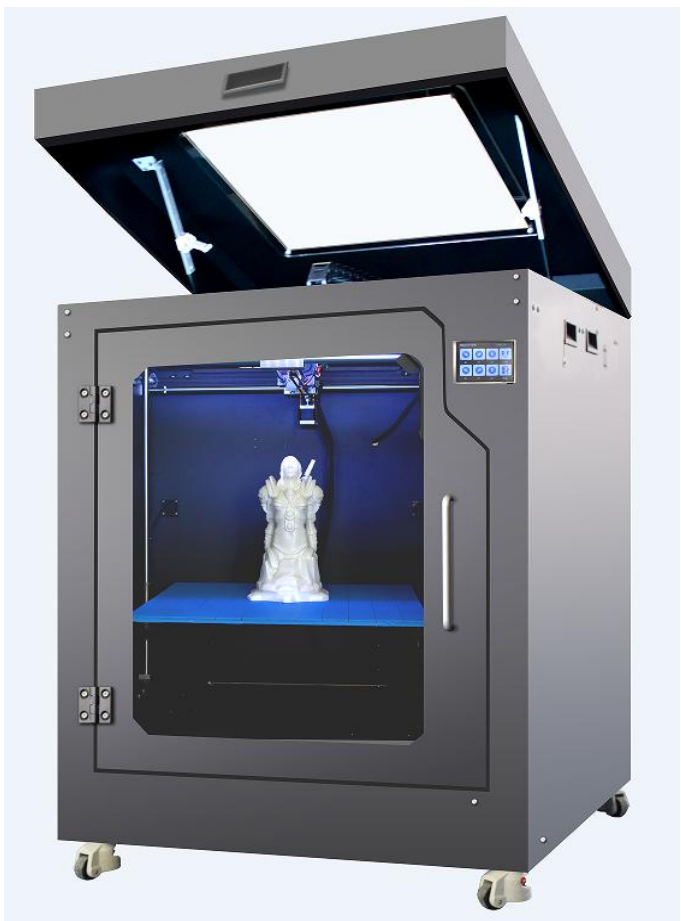

Features

- High precision, good stability
- Extruder:single(single nozzle), dual extruder(double nozzle) can be customized
- Speed printing:30-150mm/s
- Support 8 languages
- 3.2 inch color touch panel
- Pause to renew, power failure to renew, material break detection
- Customizable WIFI, camera
- Support multiple filaments to be printed

Technical Specification

Printing Technology	FDM (Fused Deposition Modeling)
Building Volume	500*500*600mm for single nozzle; 450x500x600mm for double nozzles.
Layer Thickness	0.05-0.3mm
Nozzle Diameter	0.4 mm (0.2, 0.3, 0.5, 0.6, 0.8 , 1.0, 1.2, 1.3,1.5 optional)
Number of Nozzle	Single nozzle, double nozzles (optional)
Material	PLA/ABS/TPU/PETG/Carbon fiber/wood
Filament Diameter	1.75mm
Slicing Software	Cura/S3D (Support for third-party slicings software)
Package Size	880mm*890mm*1120mm
Gross Weight	180kg
Operation System	Window Series/Mac OS/Linux
Connectivity	SD card/USB/optional WiFi
Power	110V-220V/15A,360W