


**Elev8**  
to safer heights

**VERTICAL LIFT SERIES**





VTL DC SERIES MACHINE SALIENT FEATURES

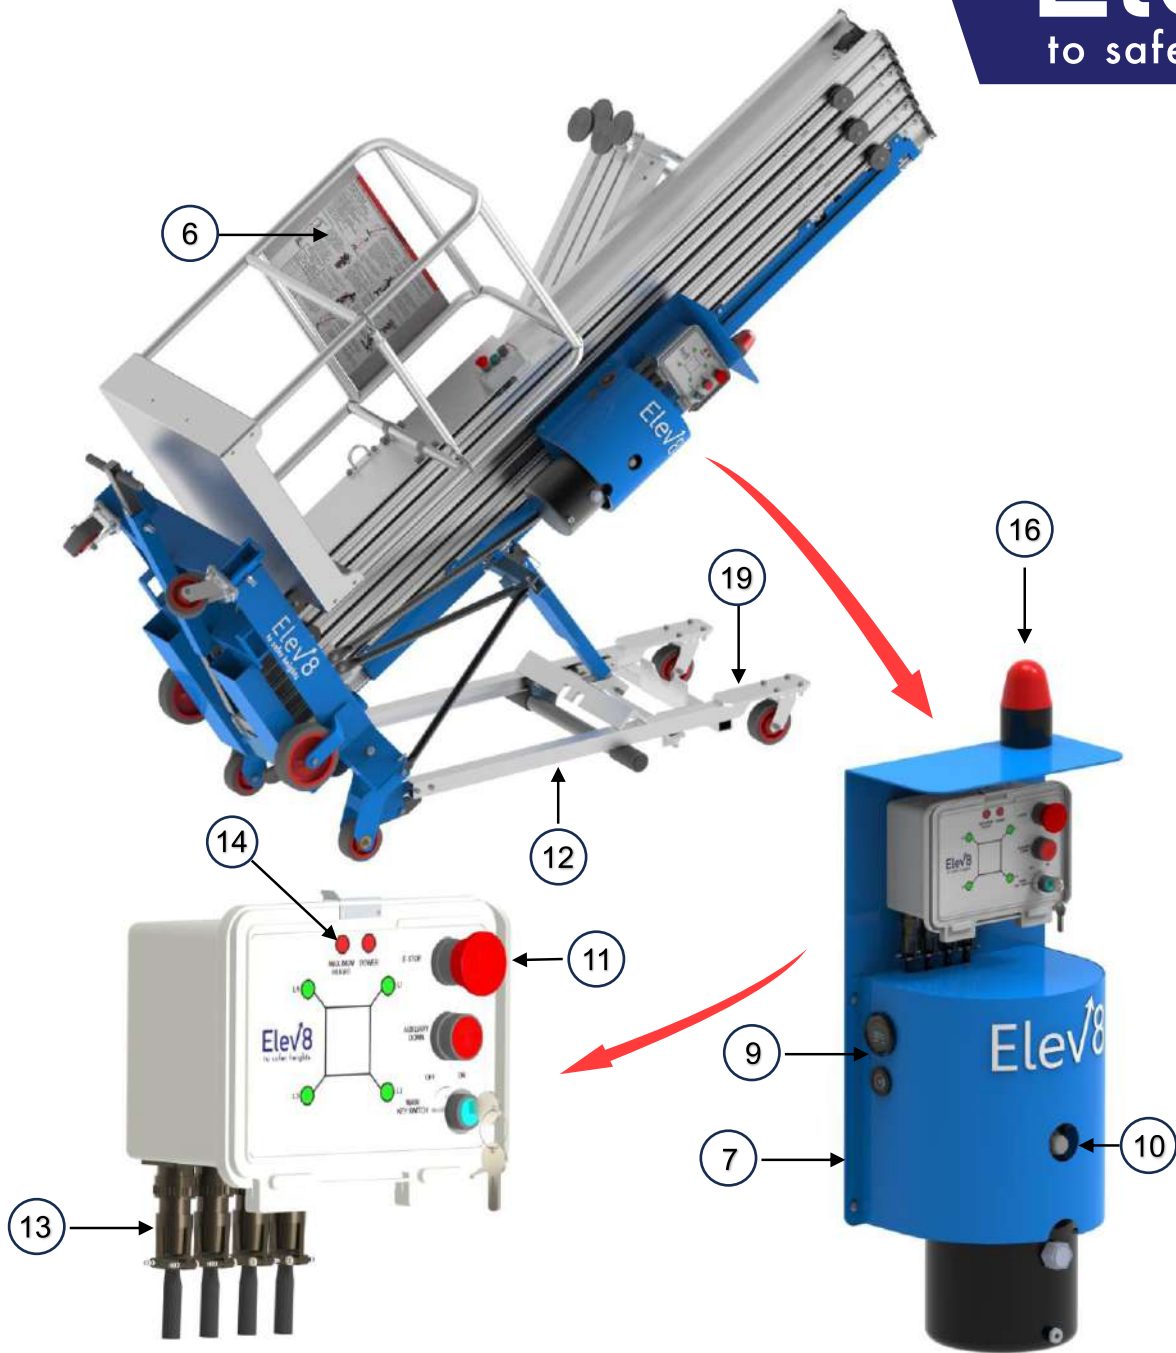


| SR NO | FEATURES                                   | SR NO | FEATURES                                       |
|-------|--|-------|--|
| 1     | LIGHT WEIGHT Aluminium Construction        | 11    | USER FRIENDLY Controls                         |
| 2     | Heavy STEEL STRUCTURE Base                 | 12    | TILT BACK Function                             |
| 3     | STAINLESS STEEL Work Platform              | 13    | MILITARY GRADE QR Connectors                   |
| 4     | Checkered Aluminium Plate For BETTER GRIP  | 14    | Maximum Height AUTO CUT-OFF Function           |
| 5     | DOUBLE SUPPORT For Primary Wheel           | 15    | SAFETY HARNESS Anchor Point                    |
| 6     | SAFETY Instruction Decal                   | 16    | Descent Alarm As STANDARD On All Machines      |
| 7     | COMPACT Powerpack Design                   | 17    | Dual Fuse Setup For Better OVERLOAD PROTECTION |
| 8     | HEAVY DUTY Aluminium Battery Box           | 18    | EASY SERVICEABLE Hydraulic Cylinder Design     |
| 9     | VOLT METER And HOUR METER                  | 19    | UNBREAKABLE Design Of Lean Back Frame          |
| 10    | Emergency Descent Valve ERGONOMIC LOCATION |       |  |

# Specifications

## Vertical Lift Series-VTL

**Elev8**  
to safer heights

| MODEL                              | VTL 20 DC             | VTL 25 DC             | VTL 30 DC             | VTL 36 DC             | VTL 40 DC             |
|------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| WORKING HEIGHT (inch)              | 26 ft                 | 30 ft                 | 36 ft                 | 42 ft                 | 46 ft                 |
| WORKING HEIGHT (mm)                | 7925 mm               | 9144 mm               | 10973 mm              | 12802 mm              | 14021 mm              |
| PLATFORM HEIGHT (inch)             | 20 ft                 | 25 ft                 | 30ft                  | 36 ft                 | 40 ft                 |
| PLATFORM HEIGHT (mm)               | 6096 mm               | 7620 mm               | 9144 mm               | 10973 mm              | 12192 mm              |
| STOWED HEIGHT (A) (inch)           | 6 ft 7 in             | 6 ft 7 in             | 6 ft 7 in             | 9 ft 3 in             | 9 ft 3 in             |
| STOWED HEIGHT (A) (mm)             | 2006 mm               | 2006 mm               | 2006 mm               | 2819 mm               | 2819 mm               |
| TILTED HEIGHT (B) (inch)           | NA                    | NA                    | NA                    | 6 ft 10 in            | 7 ft                  |
| TILTED HEIGHT (B) (mm)             | NA                    | NA                    | NA                    | 2083 mm               | 2133 mm               |
| STOWED LENGTH (C) (inch)           | 4 ft 3 in             | 4 ft 6in              | 4 ft 9in              | 4 ft 6in              | 4 ft 9in              |
| STOWED LENGTH (C) (mm)             | 1295 mm               | 1371 mm               | 1448 mm               | 1371 mm               | 1448 mm               |
| TILT BACK LENGTH (D) (inch)        | NA                    | NA                    | NA                    | 9 ft 4 in             | 9 ft 4 in             |
| TILT BACK LENGTH (D) (mm)          | NA                    | NA                    | NA                    | 2845 mm               | 2845 mm               |
| WIDTH (E) (inch)                   | 2 ft 4 in             | 2 ft 4 in             | 2 ft 4 in             | 2 ft 4 in             | 2 ft 4 in             |
| WIDTH (E) (mm)                     | 711 mm                | 711 mm                | 711 mm                | 711 mm                | 711 mm                |
| LIFT CAPACITY                      | 150 kg                | 150 kg                | 150 kg                | 150 kg                | 150 kg                |
| OUTRIGGER FOOTPRINT (F/G) (inch)   | 6 ft 2 in             | 6 ft 2 in             | 6 ft 2 in             | 7 ft 6 in             | 7 ft 6 in             |
|                                    | 5 ft 5 in             | 5 ft 5 in             | 5 ft 5 in             | 6 ft 9 in             | 6 ft 9 in             |
| OUTRIGGER FOOTPRINT (F/G) (mm)     | 1879 mm               | 1879 mm               | 1879 mm               | 2286 mm               | 2286 mm               |
|                                    | 1651 mm               | 1651 mm               | 1651 mm               | 2057 mm               | 2057 mm               |
| FRONT WALL ACCESS (H) (inch)       | 13 in                 | 10 in                 | 7 in                  | 11 in                 | 1 ft 2 in             |
| FRONT WALL ACCESS (H) (mm)         | 330 mm                | 254 mm                | 178 mm                | 279 mm                | 355 mm                |
| SIDE WALL ACCESS (I) (inch)        | 1 ft 7 in             | 1 ft 7 in             | 1 ft 7 in             | 2 ft 4 in             | 2 ft 4 in             |
| SIDE WALL ACCESS (I) (mm)          | 482 mm                | 482 mm                | 482 mm                | 711 mm                | 711 mm                |
| PLATFORM DIMENSIONS (L/W/H) (inch) | 27 in                 | 27 in                 | 27 in                 | 27 in                 | 27 in                 |
|                                    | 26 in                 | 26 in                 | 26 in                 | 26 in                 | 26 in                 |
|                                    | 44 in                 | 44 in                 | 44 in                 | 44 in                 | 44 in                 |
| PLATFORM DIMENSIONS (L/W/H) (mm)   | 686 mm                | 686 mm                | 686 mm                | 686 mm                | 686 mm                |
|                                    | 660 mm                | 660 mm                | 660 mm                | 660 mm                | 660 mm                |
|                                    | 1117 mm               | 1117 mm               | 1117 mm               | 1117 mm               | 1117 mm               |
| POWER SOURCE                       | 12 V DC 80 AH battery | 12 V DC 80 AH battery | 12 V DC 80 AH battery | 12 V DC 80 AH battery | 12 V DC 80 AH battery |
| UNLADEN WEIGHT                     | 360 kg                | 387 kg                | 409 kg                | 492 kg                | 523 kg                |

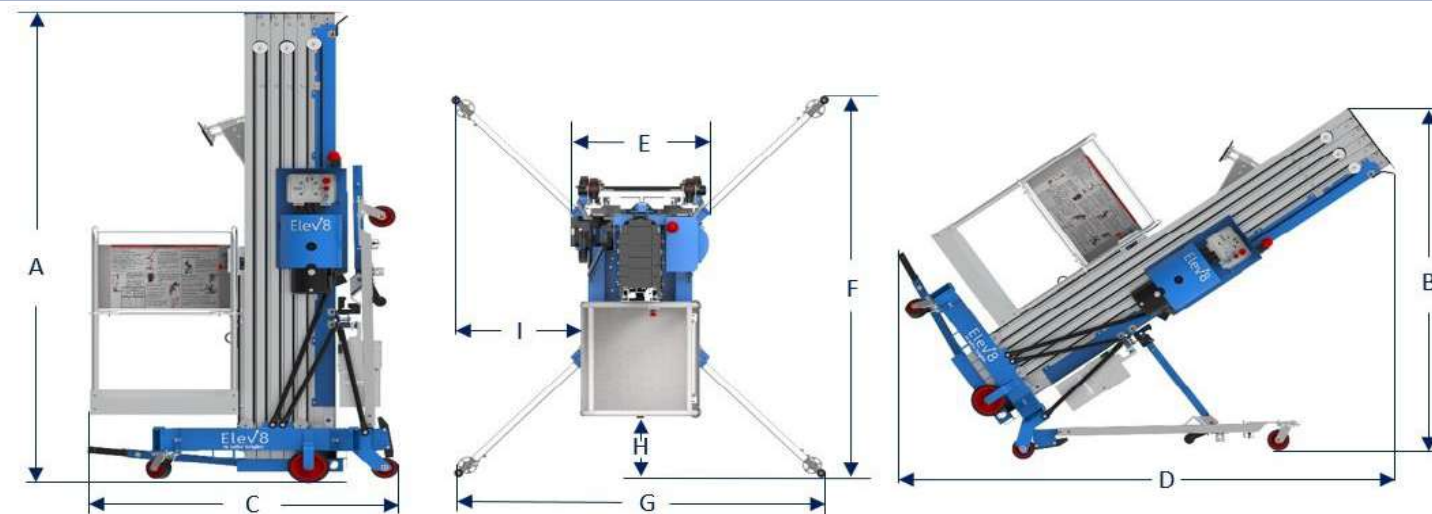

NOTE:- ANY/ALL ABOVE DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

PUBLISHED- JAN 2024