


M-01 Door stop profile

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

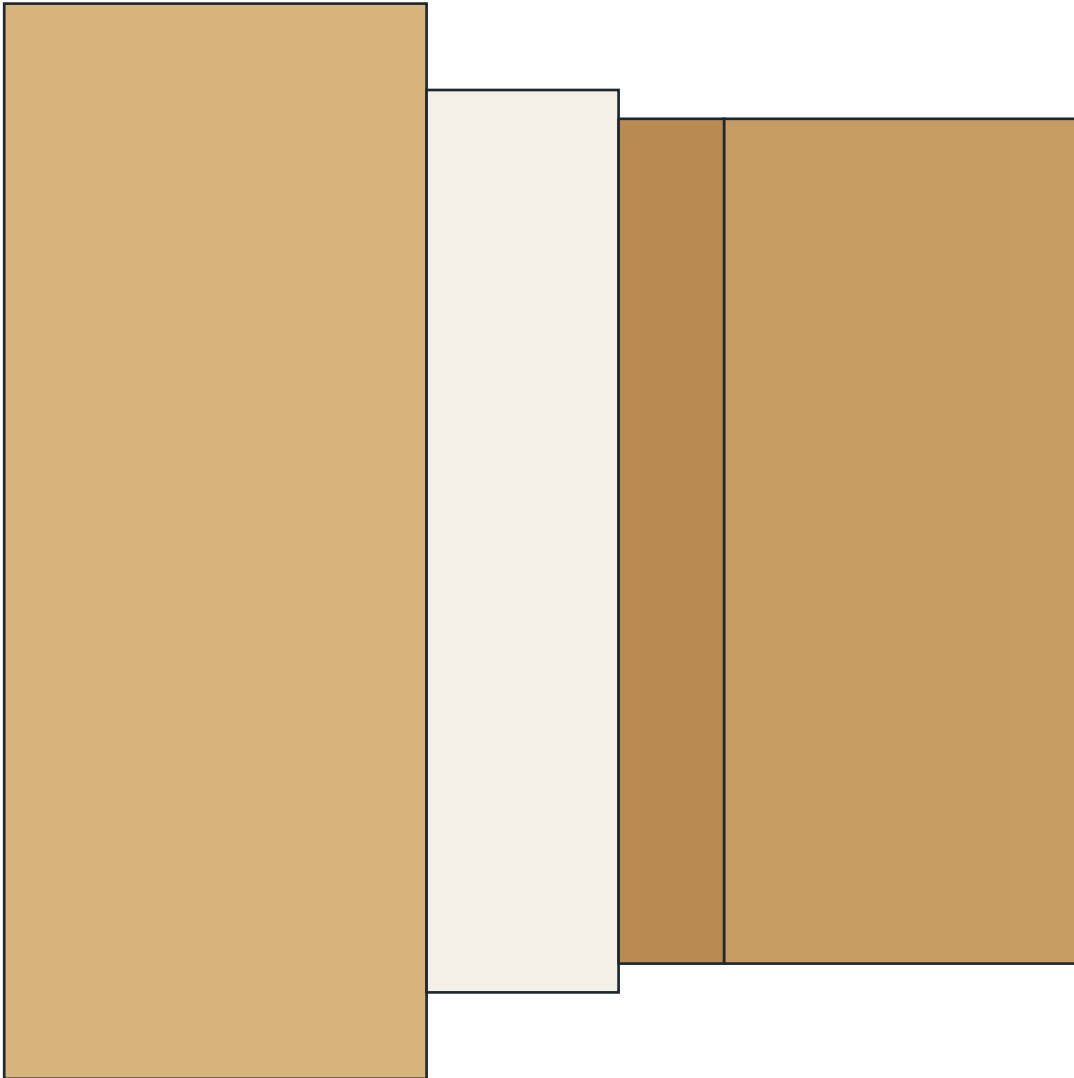

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-02 Side casing elevation

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

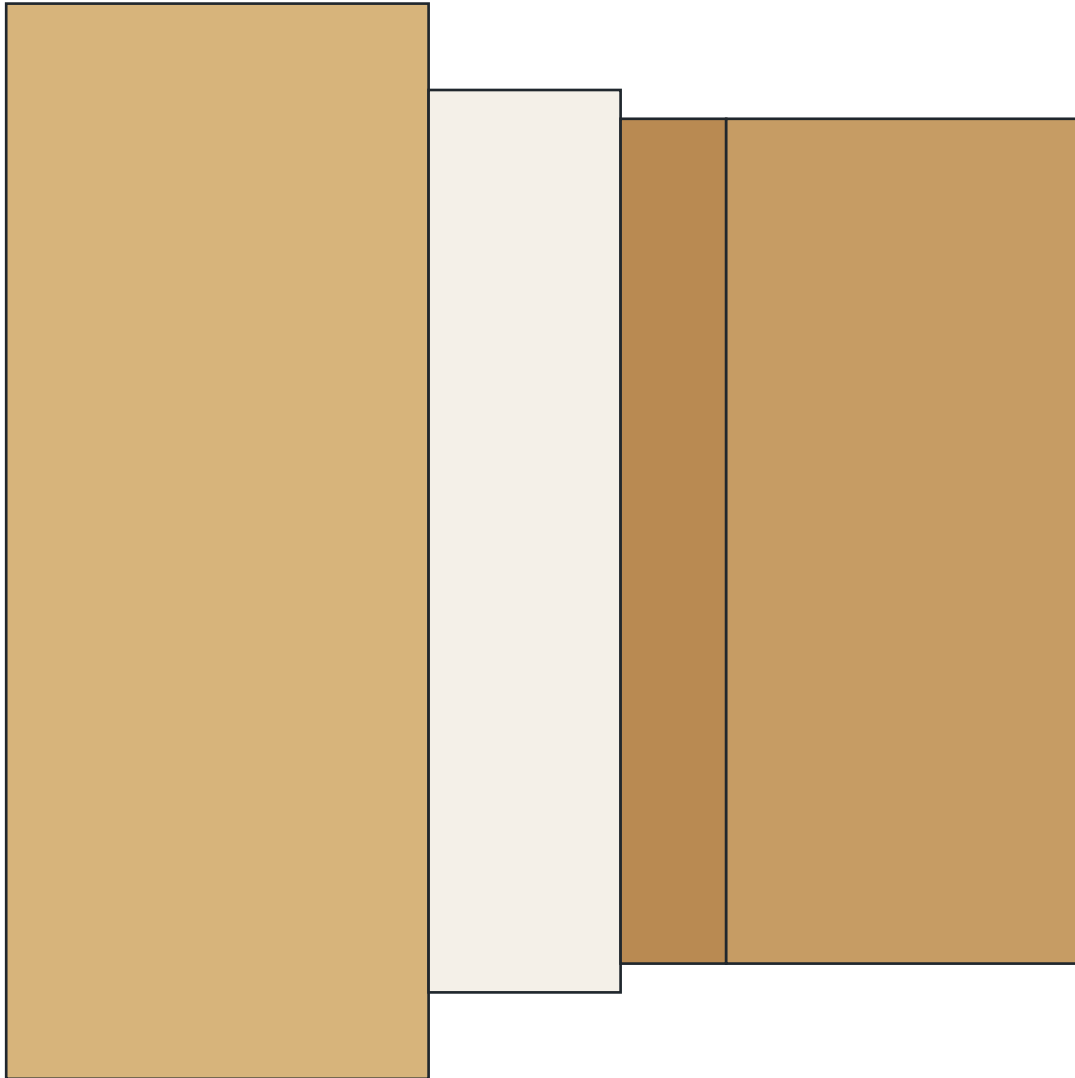

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-03 Head casing elevation

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

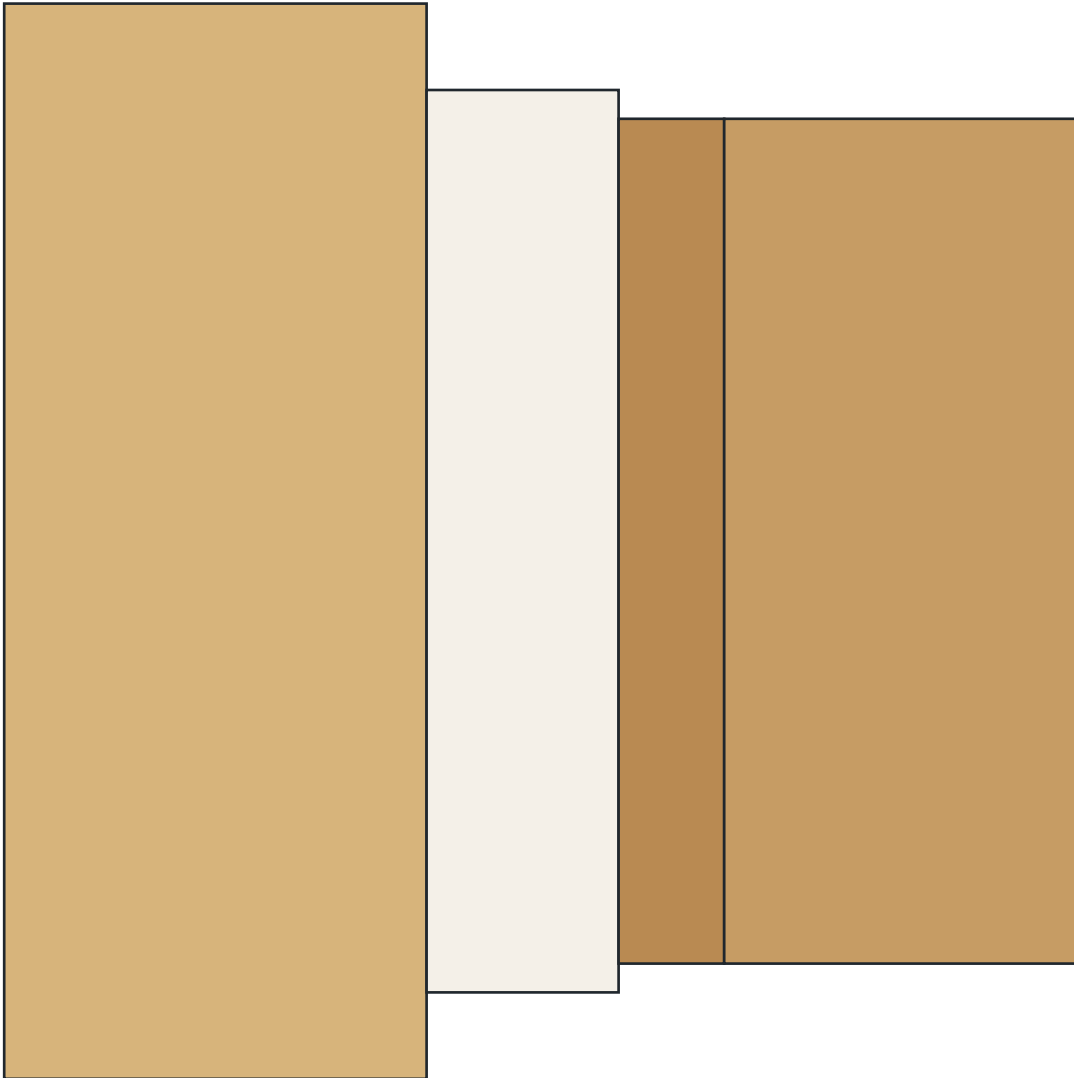

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-04 Casing cross section

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

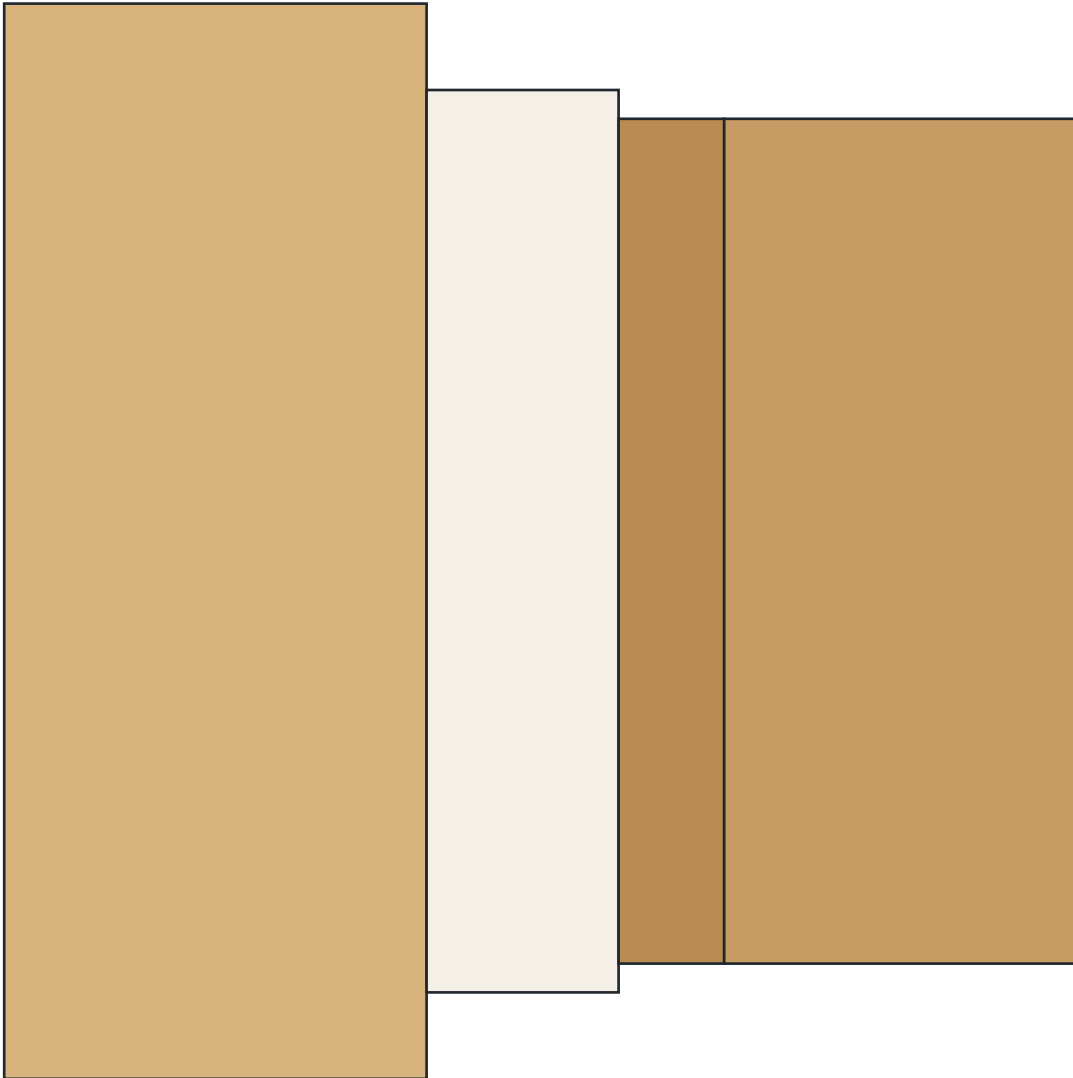

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-05 Backband cross section

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

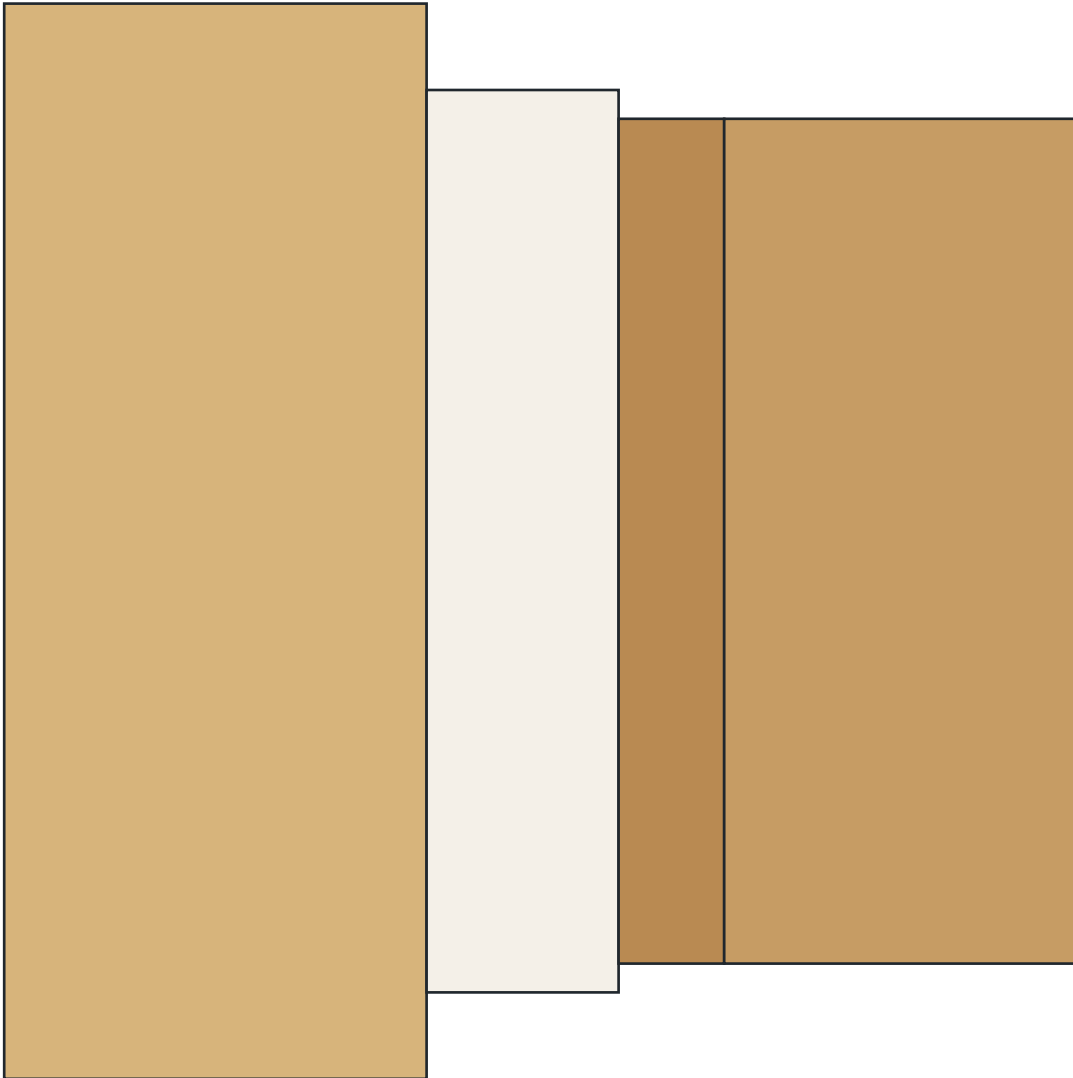

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-06 Casing and backband assembly

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

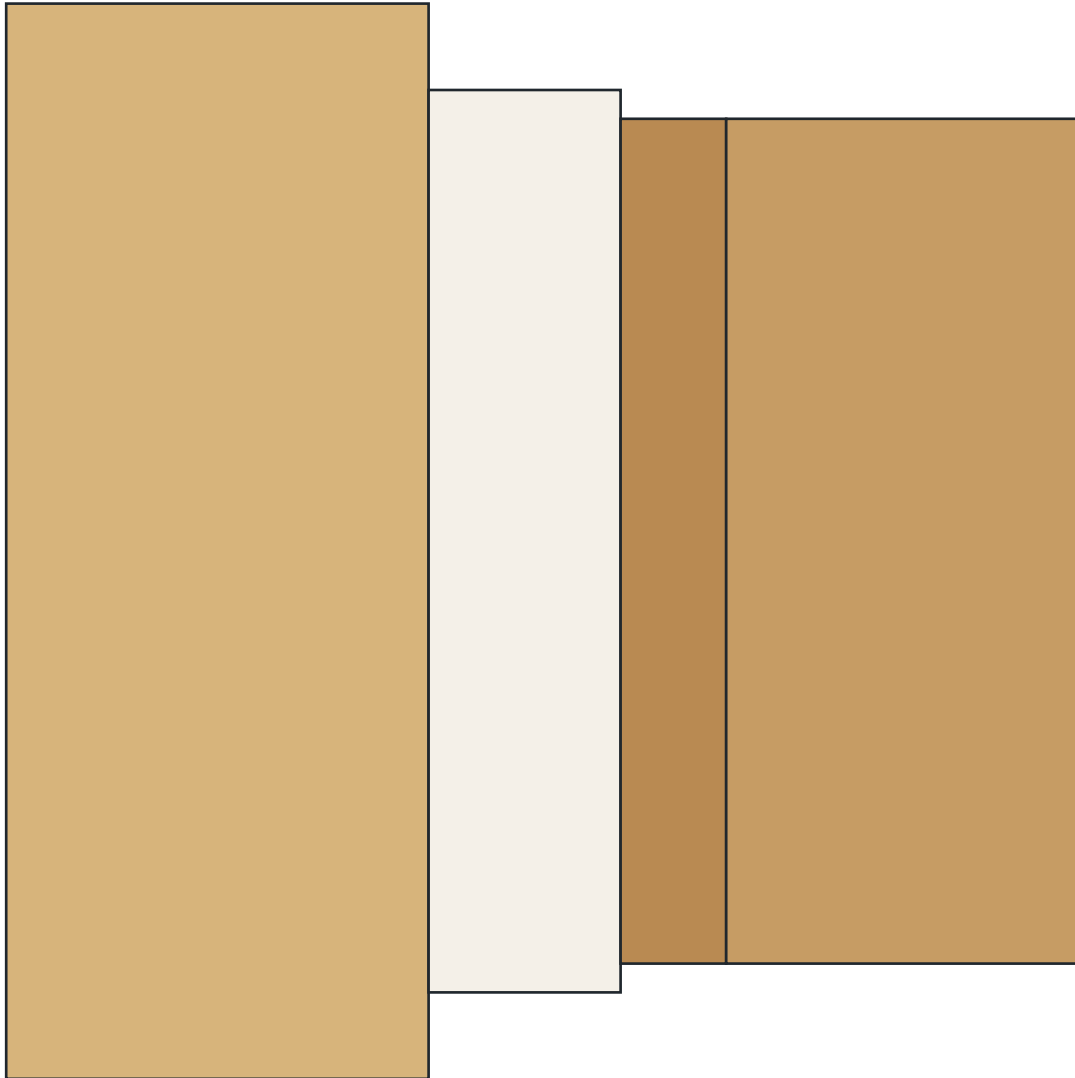

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-07 Optional head-cap assembly

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

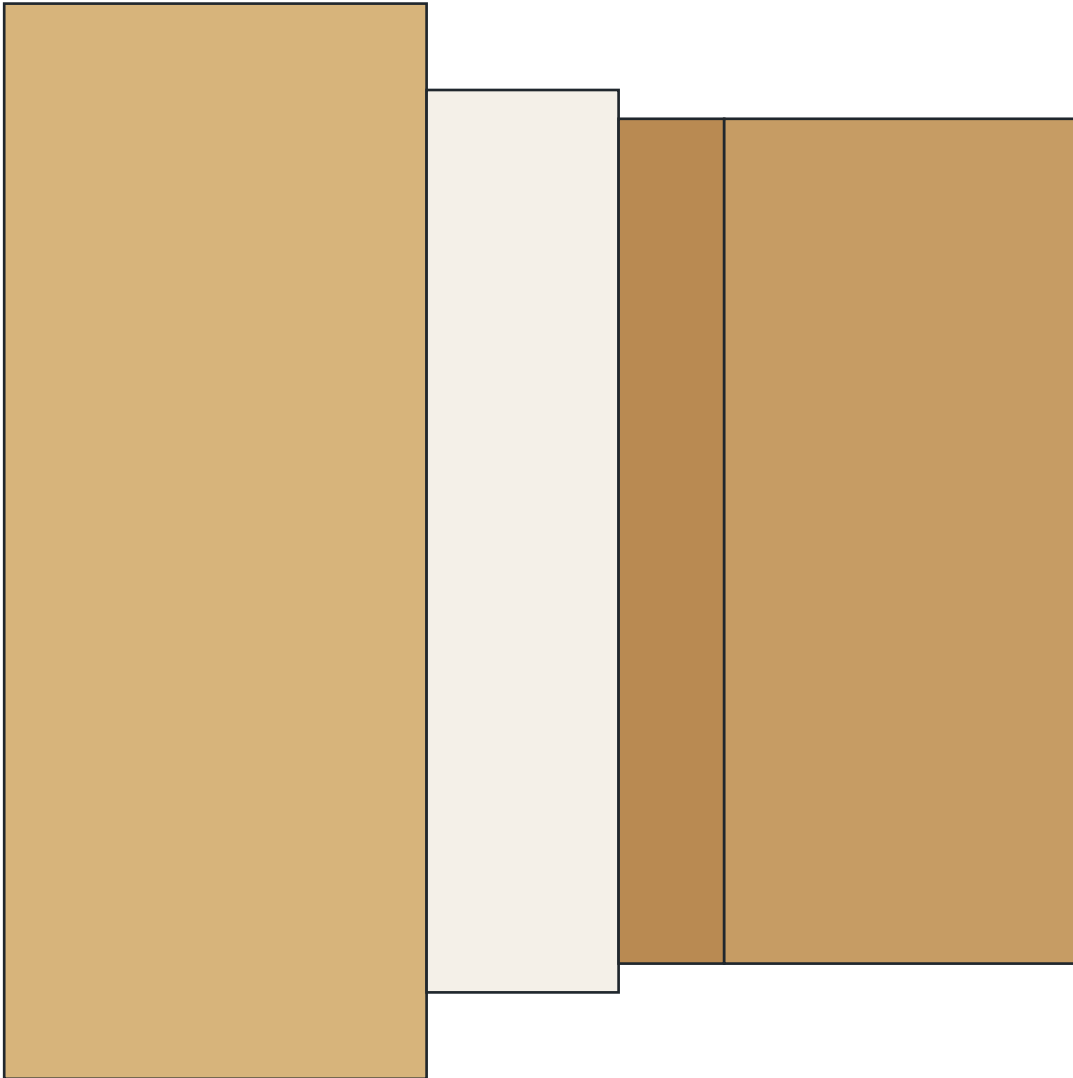

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-08 Plinth-block detail

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

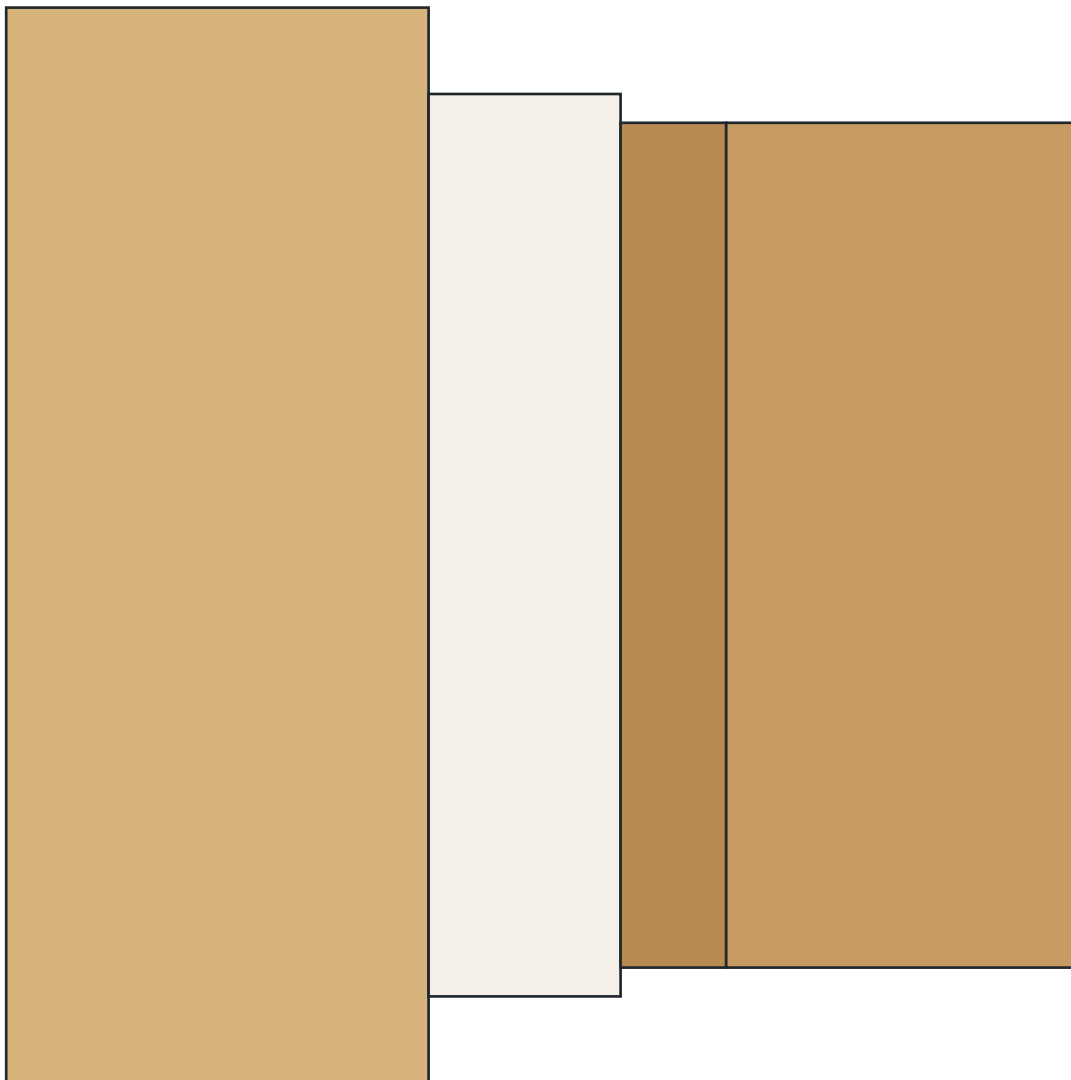

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-09 Completed jamb/stop/door/wall section

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

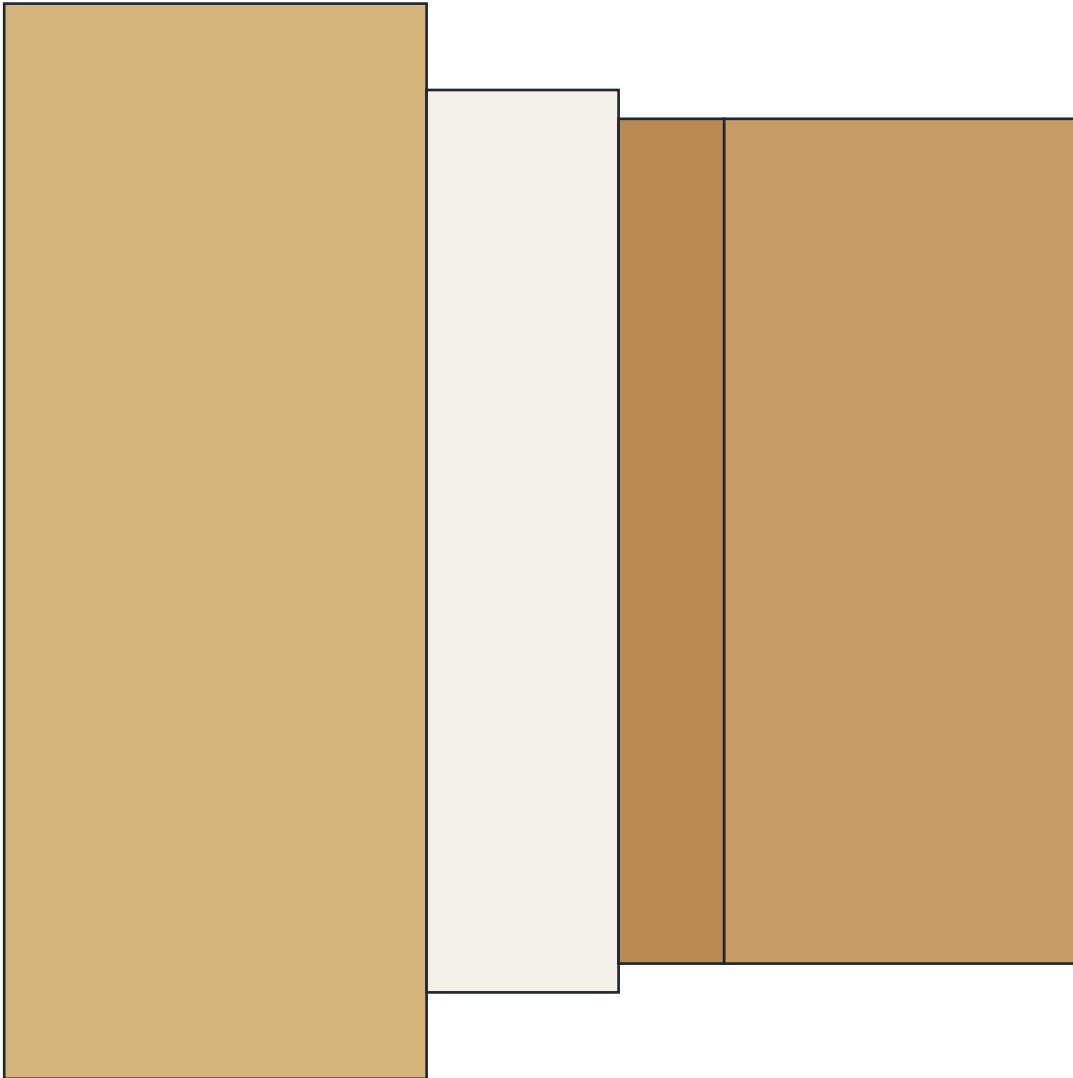

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-10 Baseboard-to-plinth and corner conditions

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

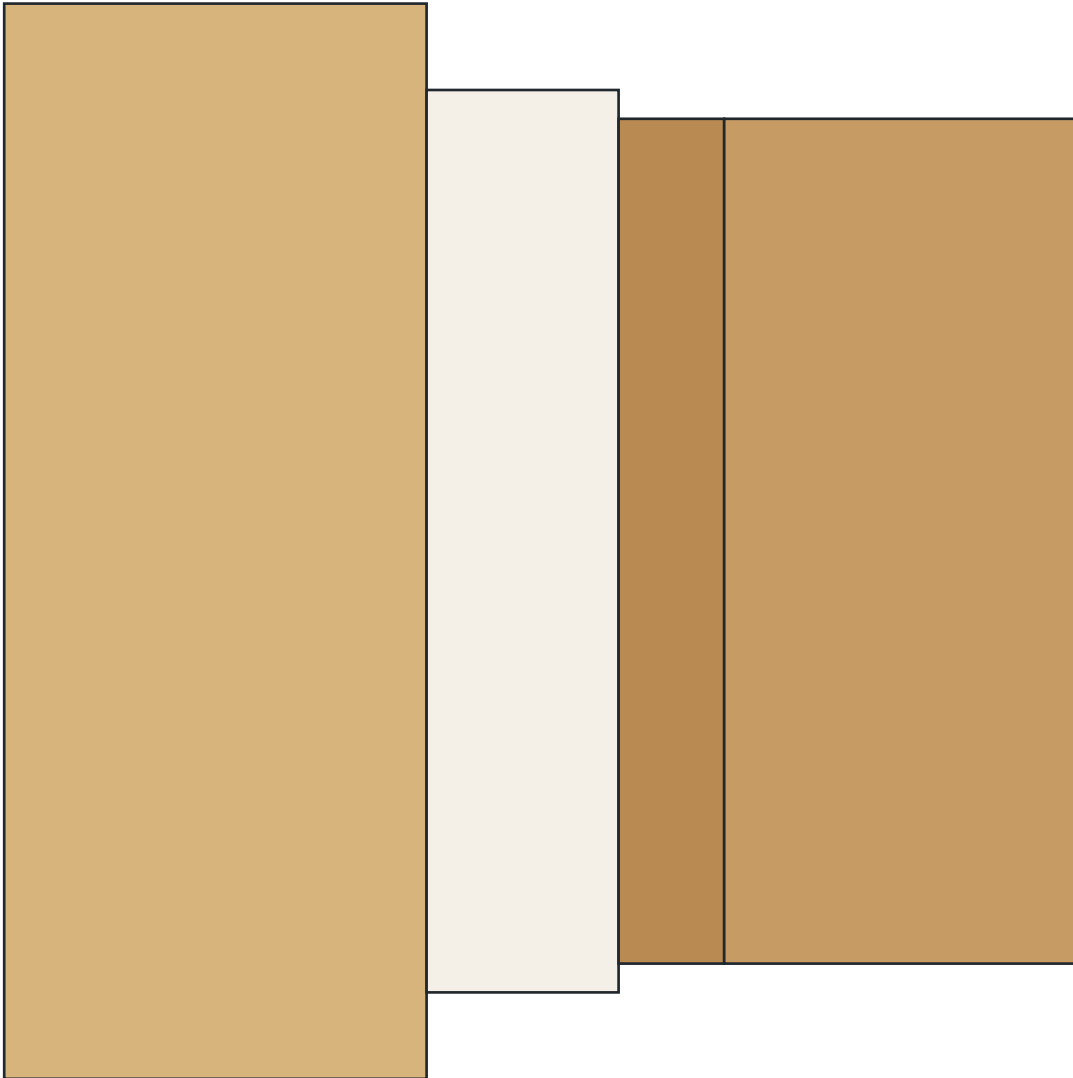

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in


All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in

M-11 Fastener locations and scribing allowance


DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

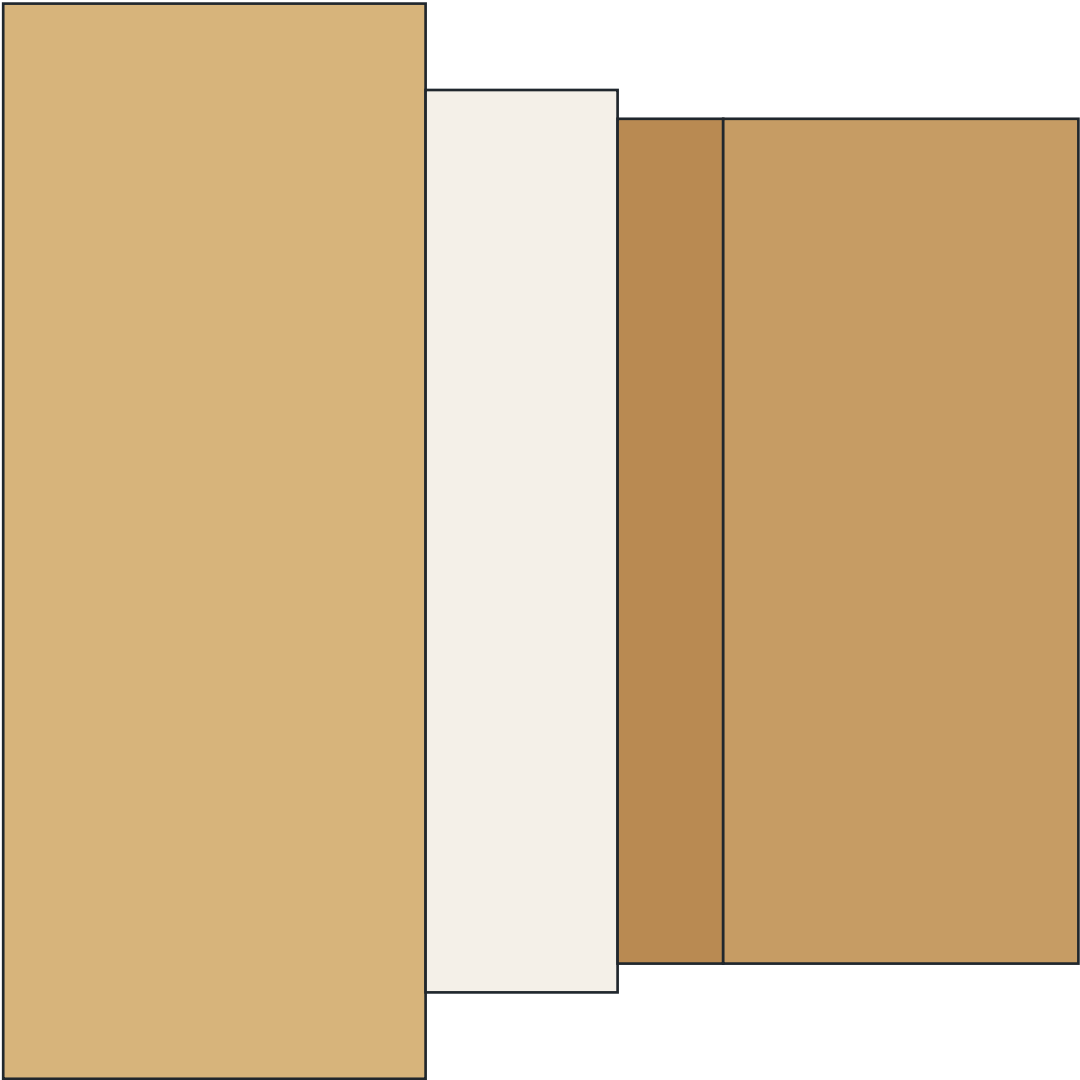

- Casing default: 3/4 x 4-1/2 in
- Backband: 1 x 1-1/8 in; 1/4 in projection
- Stop: 3/8 x 1-1/4 in
- Casing reveal: 3/16 in
- All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING
- Grain follows member length; ease visible arrises 1/32 in
- QC: reveal +/-1/32 in; joint gap <0.010 in

M-12 Finished installed opening QC

DC-1916-001 | Rev. G | Scale: NTS unless printed dimensions shown | Material: quarter-sawn white oak

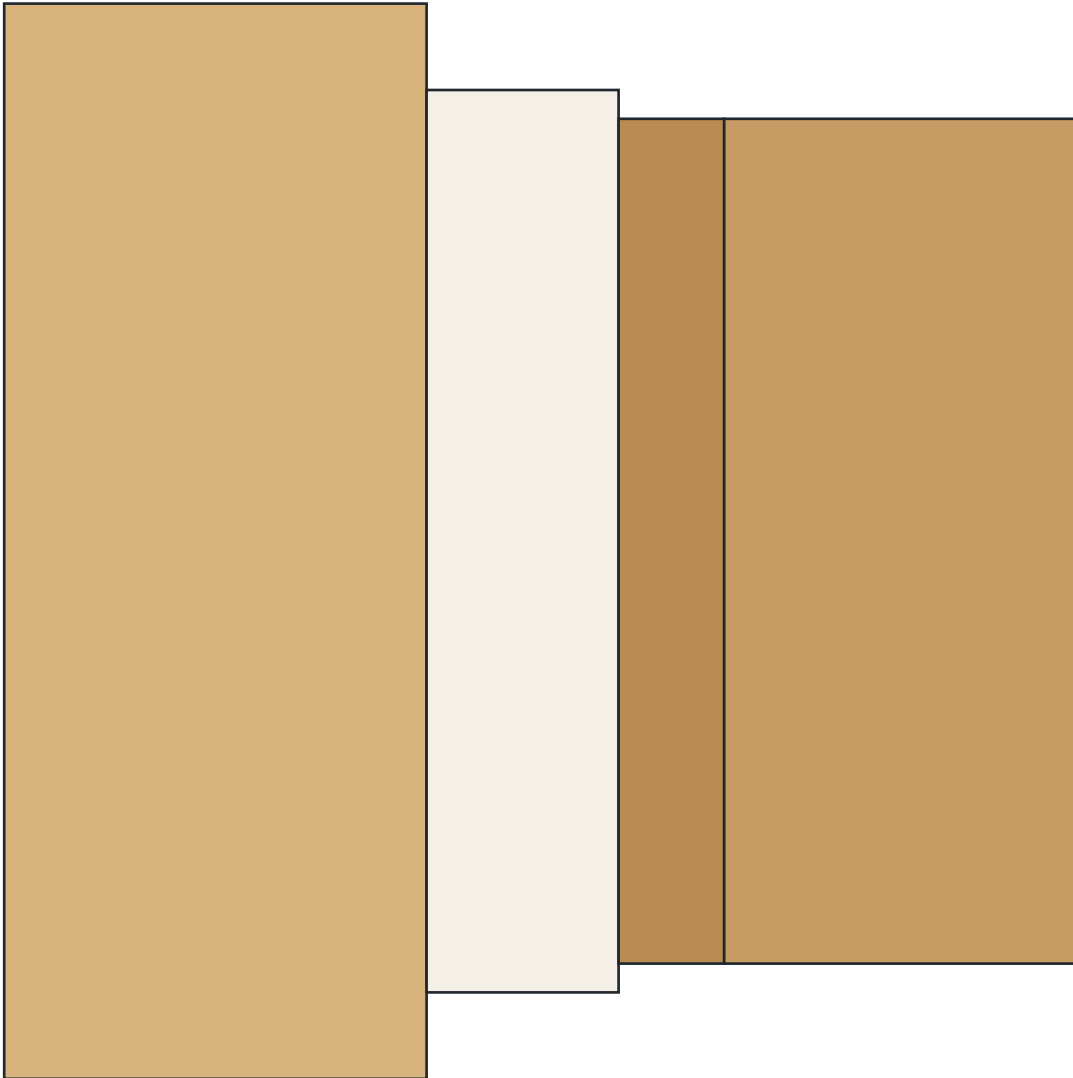

Casing default: $\frac{3}{4}$ x 4- $\frac{1}{2}$ in

Backband: 1 x 1- $\frac{1}{8}$ in; $\frac{1}{4}$ in projection

Stop: $\frac{3}{8}$ x 1- $\frac{1}{4}$ in

Casing reveal: $\frac{3}{16}$ in

All lengths, jamb projection, cap, and plinth: FIELD VERIFY BEFORE MILLING

Grain follows member length; ease visible arrises $\frac{1}{32}$ in

QC: reveal $\pm \frac{1}{32}$ in; joint gap < 0.010 in