

T-01 Completed-jamb measurement worksheet

DC-1916-001 | Rev. G | Sheet 1 of 14 | PRINT AT 100%

Record the completed opening, floor, swing, hardware, and adjacent evidence before slab fitting.

OPENING DIMENSIONS — COMPLETED JAMB

W-TOP

24" CONFIRMED

W-MIDDLE

24" CONFIRMED

W-BOTTOM

24" CONFIRMED

H-LEFT

81" CONFIRMED

H-RIGHT

81" CONFIRMED

DIAGONAL A / B / DIFFERENCE

JAMB GEOMETRY

THICKNESS L / HEAD / R

PROJECTION L / HEAD / R

LEFT PLUMB — 2 PLANES

RIGHT PLUMB — 2 PLANES

HEAD LEVEL

WINDING-STICK FACE TWIST

FLOOR, SWING, AND DOOR FIT

FINISHED FLOOR / RUG DATUM

BOTTOM GAP

3/8" TARGET

HANDING

SWING IN / OUT

LATCH-EDGE BEVEL

FIELD VERIFY

HEAD / SIDE REVEALS

1/8" EACH

STOP CONDITION / CONTACT

HARDWARE AND ADJACENT EVIDENCE

HINGE GAINS / LEAF SIZE

LOCK / BACKSET / STRIKE

ADJACENT TRIM / BASEBOARD

WALL FLATNESS / PROJECTION

FRAMING / UTILITIES

PHOTO / SAMPLE REFERENCES

MEASURED FACE A / FACE B

FIELD RELEASE

☐ ALL VALUES RECORDED

☐ OPENING RECHECKED

☐ HOLD / CONFLICT

MEASURED BY / DATE

VERIFIED BY / DATE


HOLD REASON / FIELD NOTE

APPROVED SLAB FIT TARGET

23-3/4 x 80-1/2 x 1-3/8" MAX RECTANGLE

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.




1-IN CALIBRATION SQUARE

T-02 Master story stick

DC-1916-001 | Rev. G | Sheet 2 of 14 | PRINT AT 100%

Create one signed physical master; the plotted orientation map is NTS and written stations control.

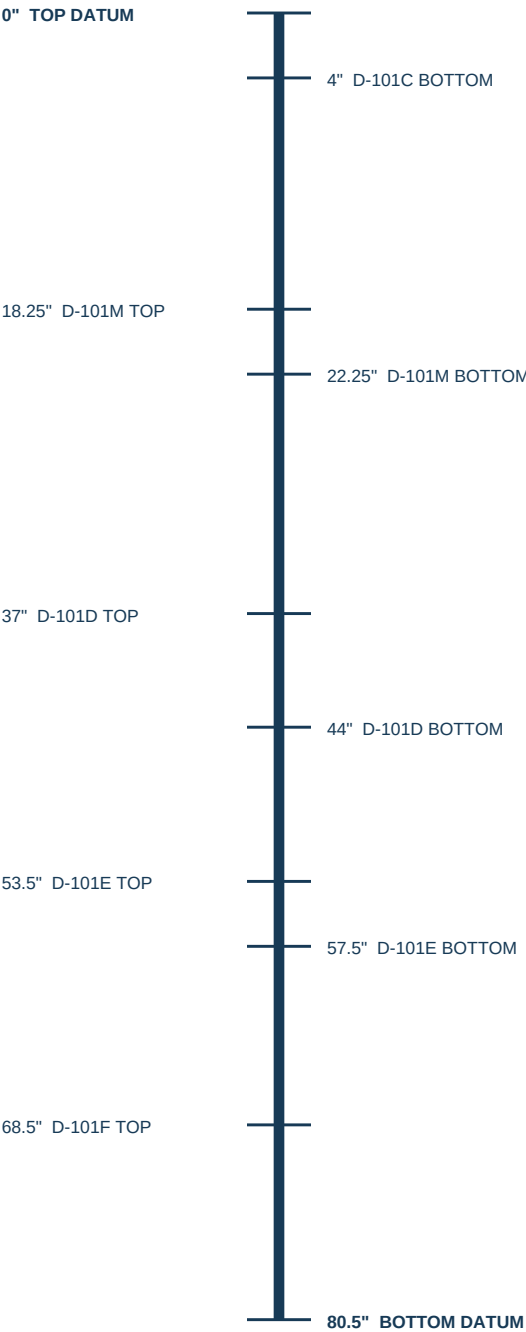

ORIENTATION MAP — NTS

STATION	MASTER MARK	TRANSFER	VERIFY
0"	TOP DATUM	_____	_____
4"	D-101C BOTTOM	_____	_____
18.25"	D-101M TOP	_____	_____
22.25"	D-101M BOTTOM	_____	_____
37"	D-101D TOP	_____	_____
44"	D-101D BOTTOM	_____	_____
53.5"	D-101E TOP	_____	_____
57.5"	D-101E BOTTOM	_____	_____
68.5"	D-101F TOP	_____	_____
80.5"	BOTTOM DATUM	_____	_____

MASTER-STICK RELEASE

PHYSICAL STICK ID / MATERIAL _____

TOP DATUM CONFIRMED _____

SHOW FACE / REFERENCE EDGE _____

HINGE STILE TRANSFER _____


LOCK STILE TRANSFER _____

OPERATOR / DATE _____

DO NOT SCALE THE NTS MAP — TRANSFER WRITTEN STATIONS.

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.



1-IN CALIBRATION SQUARE

T-03 Rail-location story stick

DC-1916-001 | Rev. G | Sheet 3 of 14 | PRINT AT 100%

Transfer every shoulder and opening ID from the approved master without chained measurements.

STATION	MARK	OPENING / MEMBER	HINGE STILE	LOCK STILE
0"	TOP DATUM	SLAB TOP		
4"	D-101C BOTTOM	TOP RAIL		
18.25"	D-101M TOP	P-01 BOTTOM		
22.25"	D-101M BOTTOM	P-02 TOP		
37"	D-101D TOP	P-02 BOTTOM		
44"	D-101D BOTTOM	P-03 TOP		
53.5"	D-101E TOP	P-03 BOTTOM		
57.5"	D-101E BOTTOM	P-04 TOP		
68.5"	D-101F TOP	P-04 BOTTOM		
80.5"	BOTTOM DATUM	SLAB BOTTOM		

TRANSFER CONTROL

APPROVED MASTER STICK ID

WORKING STICK ID

☐ SHOW FACE MARKED

☐ TOP DATUM MATCHED

☐ NO CHAINED MEASUREMENTS

☐ SECOND-PERSON CHECK

DISCREPANCY / REMAKE NOTE


TRANSFERRED BY / DATE

VERIFIED BY / DATE

Release only when both stile story sticks carry the same top datum, member IDs, shoulder lines, and opening labels.

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT


Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.



T-04 Domino joint centerlines

DC-1916-001 | Rev. G | Sheet 4 of 14 | PRINT AT 100%

Full-size 4-inch rail-end layout plus setup, test-piece, and release controls.

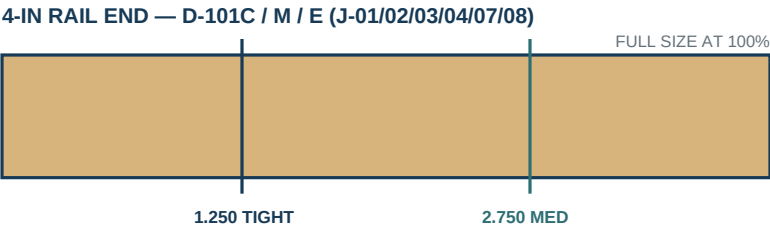

DF 500 SETUP

CUTTER

10 mm

PLUNGE A / B

25 / 25 mm

FENCE

17.5 mm / 90 deg

FACE

SHOW FACE

WIDTH A / B

TIGHT, THEN MEDIUM

JOINT	PARTS	CENTERLINES	TEST ID	RELEASE
J-01	D-101C/A	1.250 / 2.750		
J-02	D-101C/B	1.250 / 2.750		
J-03	D-101M/A	1.250 / 2.750		
J-04	D-101M/B	1.250 / 2.750		
J-07	D-101E/A	1.250 / 2.750		
J-08	D-101E/B	1.250 / 2.750		

PRODUCTION GATE

☐ UNTOUCHED FULL-LENGTH FACTORY TENONS SEAT

☐ SHOULDERS CLOSE BY HAND


☐ FACES FLUSH / NO BREAKOUT

☐ STANDARD RAIL WEB >= 0.150 IN

TEST SAMPLE / OPERATOR / DATE

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.




T-05 Wide-rail multiple-tenon layout

DC-1916-001 | Rev. G | Sheet 5 of 14 | PRINT AT 100%

Full-size lock-rail pattern and split full-size bottom-rail pattern for accurate transfer.

D-101D LOCK RAIL — 7 IN FULL SIZE

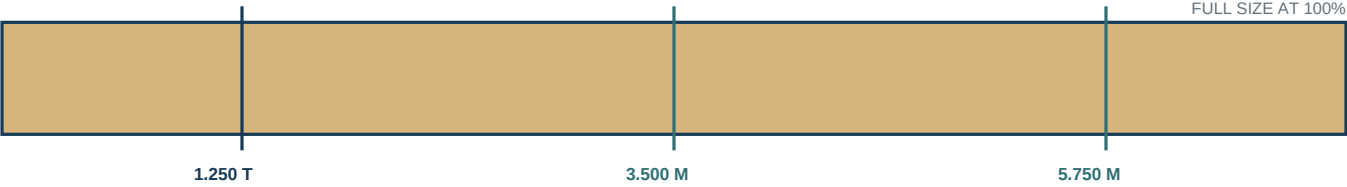

D-101F BOTTOM RAIL — SEGMENT A (0–6 IN)



D-101F BOTTOM RAIL — SEGMENT B (6–12 IN)



WIDE-RAIL RELEASE

☐ SHOW FACE + REFERENCE EDGE MARKED

☐ FIRST MORTISE TIGHT

☐ REMAINING MORTISES MEDIUM

☐ 25 / 25 MM PLUNGE


J-05 / J-06 TEST IDS _____

J-09 / J-10 TEST IDS _____

OPERATOR / DATE / SECOND CHECK _____

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.




1-IN CALIBRATION SQUARE


T-06 Muntin joint layout

DC-1916-001 | Rev. G | Sheet 6 of 14 | PRINT AT 100%

Full-size D-101G and receiver-footprint layouts with sectioned web acceptance records.

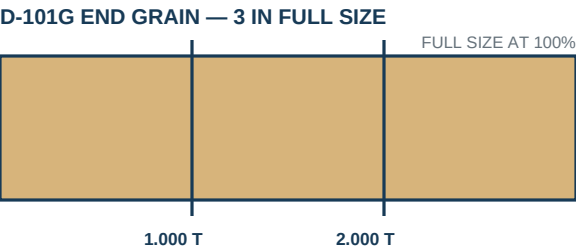

6 mm cutter | 20 mm plunge into D-101G | BOTH mortises tight

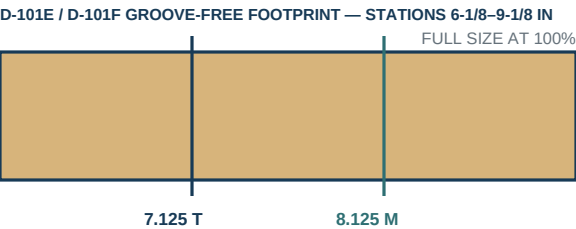


Receiver rail: 6 mm cutter | 20 mm plunge | groove segments remain 0-6-1/8 and 9-1/8-15-1/4 in

SECTIONED TP-11 / TP-12 WEB PROOF			
MEASURED FEATURE	MINIMUM	ACTUAL	PASS
D-101G LEFT GROOVE-TO-MORTISE	>= 0.100 in		
D-101G RIGHT GROOVE-TO-MORTISE	>= 0.100 in		
D-101G INTER-MORTISE WEB	>= 0.220 in		
D-101E RECEIVER INTER-MORTISE	>= 0.100 in		
D-101F RECEIVER INTER-MORTISE	>= 0.100 in		
SECTIONED SAMPLE IDS / APPROVER _____			

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.



1-IN CALIBRATION SQUARE

T-07 Domino setup register

DC-1916-001 | Rev. G | Sheet 7 of 14 | PRINT AT 100%

Record every J-01 through J-12 setup, test result, and release before production.

MACHINE / OPERATOR CONTROL

DF 500 MACHINE ID

OPERATOR / DATE

10 MM CUTTER ID / CONDITION

6 MM CUTTER ID / CONDITION


JOINT	CUTTER	PLUNGE	FENCE	A B WIDTHS	TEST ID	DRY FIT	RELEASE
J-01	10 mm	25/25	17.5/90	T/M T/M	TP-01		
J-02	10 mm	25/25	17.5/90	T/M T/M	TP-02		
J-03	10 mm	25/25	17.5/90	T/M T/M	TP-03		
J-04	10 mm	25/25	17.5/90	T/M T/M	TP-04		
J-05	10 mm	25/25	17.5/90	T/M T/M	TP-05		
J-06	10 mm	25/25	17.5/90	T/M T/M	TP-06		
J-07	10 mm	25/25	17.5/90	T/M T/M	TP-07		
J-08	10 mm	25/25	17.5/90	T/M T/M	TP-08		
J-09	10 mm	25/25	17.5/90	T/M T/M	TP-09		
J-10	10 mm	25/25	17.5/90	T/M T/M	TP-10		
J-11	6 mm	20/20	17.5/90	T/T T/M	TP-11		
J-12	6 mm	20/20	17.5/90	T/T T/M	TP-12		

REGISTER RELEASE

SCRAP STOCK / THICKNESS / MOISTURE

FACE / EDGE / FENCE BLOCK ID

FINAL VERIFIER / DATE



T-08 Domino test-piece worksheet

DC-1916-001 | Rev. G | Sheet 8 of 14 | PRINT AT 100%

Prove untouched factory tenons first; condition only a separate, never-shortened rehearsal set.

TEST-PIECE IDENTIFICATION

JOINT FAMILY / TP ID

PARTS A / B

STOCK THICKNESS / MC

CUTTER / PLUNGE / FENCE

SHOW FACE / REFERENCE EDGE

FIRST GATE — UNTOUCHED FACTORY TENONS

☐ FULL-LENGTH FACTORY TENONS

☐ HAND-PRESSURE SEATING

☐ SHOULDERS CLOSED <= 0.005

☐ FACES FLUSH <= 0.010

☐ NO BREAKOUT / CRUSHING

TENON LOT / RESULT

SECOND GATE — SEPARATE REHEARSAL SET

☐ SEPARATE SET LABELED

☐ RIBS / ENDS MINIMALLY EASED

☐ TENONS NEVER SHORTENED

☐ HAND REMOVABLE

☐ PRODUCTION TENONS UNTOUCHED

SET ID / RESULT


MEASURED ACCEPTANCE

FEATURE	LIMIT	ACTUAL	PASS
SHOULDER GAP	<= 0.005 in		
FACE FLUSH	<= 0.010 in		
STANDARD RAIL WEB TO GROOVE	>= 0.150 in		
D-101G GROOVE WEB / INTER-WEB	>= .100 / .220		
RECEIVER INTER-MORTISE WEB	>= 0.100 in		

APPROVED / REMAKE / HOLD — SIGNATURE / DATE

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.




1-IN CALIBRATION SQUARE

T-09 Hinge layout

DC-1916-001 | Rev. G | Sheet 9 of 14 | PRINT AT 100%

Trace and measure the actual leaf, transfer three gains, and release only on steel setup screws.

PHYSICAL LEAF TRACE / MEASURE

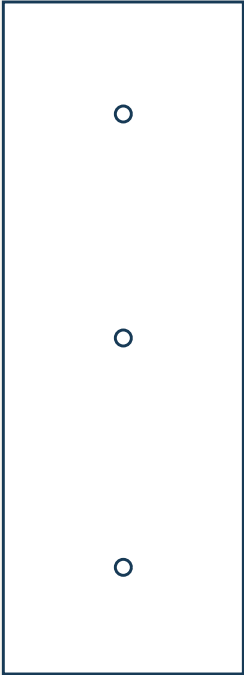

3-1/2 IN NOMINAL — TRACE ACTUAL LEAF

LEAF H / W / T

KNUCKLE / PIN AXIS

SCREW DIA / LENGTH

HINGE POSITION REGISTER

HINGE	DATUM	DOOR	JAMB	OK
TOP	HEAD TO LEAF TOP			
MIDDLE	TRANSFER / EQUALIZE			
BOTTOM	FLOOR TO LEAF BOTTOM			

EXISTING GAIN / NEW LAYOUT BASIS

BARREL CLEARANCE / THROW

MACHINING AND RELEASE

☐ KNIFE ACTUAL LEAF — NO SCALE

☐ ROUT SHALLOW / PARE TO FIT

☐ PILOTS MATCH SCREW ROOT

☐ STEEL SETUP SCREWS FIRST

☐ BRASS ONLY AFTER FULL FINISH CURE

CYCLE TEST / APPROVER

RELEASE NOTE


HINGE TEMPLATE / JIG ID

DATE / OPERATOR

REMAKE / HOLD CONDITION

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.



T-10 Lock verification worksheet

DC-1916-001 | Rev. G | Sheet 10 of 14 | PRINT AT 100%

Measure the actual lock, strike, screws, and J-06 clearance before any stile machining.

ACTUAL HARDWARE IDENTIFICATION

MANUFACTURER / MODEL _____	FUNCTION / HANDING _____
LOCKSET ID / PHOTO REF _____	DATE / MEASURED BY _____
DO NOT CUT FROM NOMINAL PRODUCT NAME _____	

LOCK BODY / FACEPLATE

BACKSET _____

BODY HEIGHT _____

BODY DEPTH _____

BODY THICKNESS _____

FACEPLATE W / H / T _____

SPINDLE AXIS _____

KEY / PRIVACY AXIS _____

STRIKE / SCREWS / CLEARANCE

LATCH PROJECTION _____

STRIKE W / H / DEPTH _____

LIP / RETURN _____

CASE SCREW DIA / LENGTH _____

STRIKE SCREW DIA / LENGTH _____

J-06 CLEAR WOOD _____


UTILITIES / PRIOR HOLES _____

MACHINING RELEASE

☐ BODY INSIDE D-101B	☐ >= 0.250 IN CLEAR OF J-06	☐ BORE BOTH FACES
☐ FACEPLATE FLUSH <= .005	☐ LATCH WORKS WITHOUT LIFT	☐ STEEL SETUP HARDWARE
JIG / DEPTH STOP / TEST BLOCK ID _____	OPERATOR / APPROVER / DATE _____	
REMAKE / HOLD NOTE _____		

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.



1-IN CALIBRATION SQUARE

T-11 Strike transfer guide

DC-1916-001 | Rev. G | Sheet 11 of 14 | PRINT AT 100%

Transfer from the naturally latched hanging door; never locate the strike from nominal dimensions.

PRECONDITION — HUNG OPERATING DOOR

☐ HINGES RELEASED ☐ REVEALS RELEASED ☐ LOCK OPERATES ☐ STEEL SETUP SCREWS

DOOR / JAMB REFERENCE _____ TRANSFER DATE / OPERATOR _____

TRANSFER SEQUENCE — NEVER LOCATE FROM NOMINAL DIMENSIONS

1 CLOSE TO NATURAL LATCH

2 MARK LATCH CENTER

3 TRANSFER TO JAMB

4 KNIFE ACTUAL STRIKE

5 MORTISE / PILOT

6 CYCLE AND RELEASE

STRIKE MEASUREMENTS

NATURAL LATCH HEIGHT _____

STRIKE CENTER _____

STRIKE W / H / DEPTH _____

LIP / RETURN _____

PILOT / SCREW _____

JAMB SUBSTRATE _____

QUIET CONTACT WITNESS _____


FUNCTION RELEASE

- ☐ LATCHES WITHOUT PUSH
- ☐ NO DOOR LIFT
- ☐ NO RATTLE
- ☐ STOP CONTACT CONTINUOUS
- ☐ 20 CYCLES COMPLETE
- ☐ FINAL STRIKE TRACE SAVED

APPROVER / DATE _____

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.



1-IN CALIBRATION SQUARE

T-12 Glue-up clamp map

DC-1916-001 | Rev. G | Sheet 12 of 14 | PRINT AT 100%

Use current published OPEN time; both rehearsal and live final gates must finish at or below 75%.

SIGNED ADHESIVE TIME BASIS

ADHESIVE / LOT / TDS REV _____

SHOP TEMP / RH _____

CURRENT PUBLISHED OPEN TIME _____ min

75% MAX = OPEN x 0.75 _____ min

REHEARSAL FINAL GATE _____ min

REHEARSAL <= 75% PASS / HOLD _____

STAGE A LIVE FINAL GATE _____ min

STAGE B LIVE FINAL GATE _____ min

Timer starts at FIRST ADHESIVE CONTACT. Clamp complete is a CHECKPOINT ONLY; timing continues through final geometry and panel-movement acceptance.

CLAMP MAP / STAGING

CLAMP 1 _____

CLAMP 2 _____

CLAMP 3 _____

CLAMP 4 _____

CLAMP 5 _____

1

2

3

4

5

PRESSURE _____

PRESSURE _____

PRESSURE _____

PRESSURE _____

PRESSURE _____

☐ CAULS PRESET

☐ SPACERS STAGED

☐ K/L DRY

FINAL GATES — EACH LIVE STAGE

☐ SHOULDERS CLOSED

☐ DIAGONALS A-B <= 1/16

☐ TWIST <= 1/32

☐ ALL FIVE PANELS MOVE

☐ K/L MOVE IN STAGE A

☐ FINAL GEOMETRY + PANEL-MOVEMENT <= 75%


☐ CLAMP COMPLETE TIME RECORDED

☐ FINAL GATE TIME RECORDED

STAGE / OPERATOR _____

APPROVER / DATE _____

HOLD if either rehearsal or live final gate exceeds 75% of CURRENT PUBLISHED OPEN TIME.



1-IN CALIBRATION SQUARE

T-13 Moulding measurement worksheet

DC-1916-001 | Rev. G | Sheet 13 of 14 | PRINT AT 100%

Quick-transfer card for the mandatory four-page Face A / Face B production worksheet.

USE THE FOUR-PAGE FIELD WORKSHEET FOR PRODUCTION RELEASE

WORKSHEET REV / PAGE SET _____

OPENING / ROOM _____

☐ FACE A

☐ FACE B

☐ FACE B OMIT

☐ FIELD RELEASE SIGNED

FACE A QUICK TRANSFER

W-T / W-M / W-B _____

H-L / H-R _____

HEAD SCHEME _____

M-201 CASING _____

M-202A/B/C BACKBAND _____

M-203 STOP _____

M-204 CAP EVIDENCE _____

M-205 PLINTH EVIDENCE _____

BASEBOARD / FLOOR DATUM _____

WALL PROJECTION / SCRIBE _____

FACE B QUICK TRANSFER / OMIT

W-T / W-M / W-B _____

H-L / H-R _____

HEAD SCHEME _____

M-201 CASING _____

M-202A/B/C BACKBAND _____

M-203 STOP _____

M-204 CAP EVIDENCE _____

M-205 PLINTH EVIDENCE _____

BASEBOARD / FLOOR DATUM _____

WALL PROJECTION / SCRIBE _____

PERMANENT INSTALLATION ORDER — AFTER FULL FINISH CURE

1 PLINTHS

2 CASING

3 BACKBAND / RETURNS

4 CAP

5 STOPS LAST

TRANSFERRED BY / DATE / APPROVAL _____

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.



1-IN CALIBRATION SQUARE

T-14 Final inspection record

DC-1916-001 | Rev. G | Sheet 14 of 14 | PRINT AT 100%

Release geometry, function, movement, trim, finish, and hardware as one completed system.

PROJECT / RELEASE IDENTIFICATION

OPENING / DOOR ID _____INSPECTION DATE _____

INSPECTOR / OWNER _____FINISH CURE DATE _____

SYSTEM	ACCEPTANCE CRITERION	PASS / HOLD	INITIAL / DATE
GEOMETRY	HEAD LEVEL <= 1/16; LEGS PLUMB <= 1/16		
REVEALS	HEAD / SIDES TO RELEASED TARGET		
UNDERCUT	FLOOR / RUG CLEARANCE ACCEPTED		
SWING	FULL ARC; NO RUB OR SPRING-BACK		
LATCH	WORKS WITHOUT PUSH OR LIFT		
STOP	QUIET, CONTINUOUS CONTACT		
HINGES	BARRELS ALIGNED; BRASS AFTER CURE		
LOCK / STRIKE	FACEPLATE FLUSH; JOINT GAP < .010		
PANELS	ALL FIVE RETAIN MOVEMENT		
CASING	REVEAL 3/16 +/- 1/32; SCRIBES CLOSED		
BACKBAND	PROJECTION +/- 1/32; RETURNS CLOSED		
CAP / PLINTH	EVIDENCE + ORDER VERIFIED OR OMIT		
FINISH	UNIFORM; NO POOLS / CONTAMINATION		
HARDWARE	FINAL FASTENERS / PILOTS / TORQUE PASS		

FINAL DISPOSITION


☐ RELEASED☐ PUNCH LIST☐ REMAKE / HOLD

FINAL SIGNATURE / DATE _____

PUNCH / HOLD NOTE _____

REFERENCE FACE: SHOW FACE | REFERENCE EDGE: TOP / LEFT

Verify calibration, orientation, part ID, and written dimensions before transfer or cutting.



1-IN CALIBRATION SQUARE