


ASSY-77 H10-D — identity of every recording site

Contact geometry from probeinterface (cambridge neurotech/ASSY-77-H10); connector-pin order from the vendor map; AD channels from H10_D_open_Cheetah2026-07-21_16-59-03.cfg.



CSC32 is the one site not given by pin = AD – 63.
AD 111 is unused and pin 48 unclaimed, and window W1 places CSC32 at the tip — so it is the back-shank tip.

a Kilosort channel index at each contact, to scale, from probeinterface

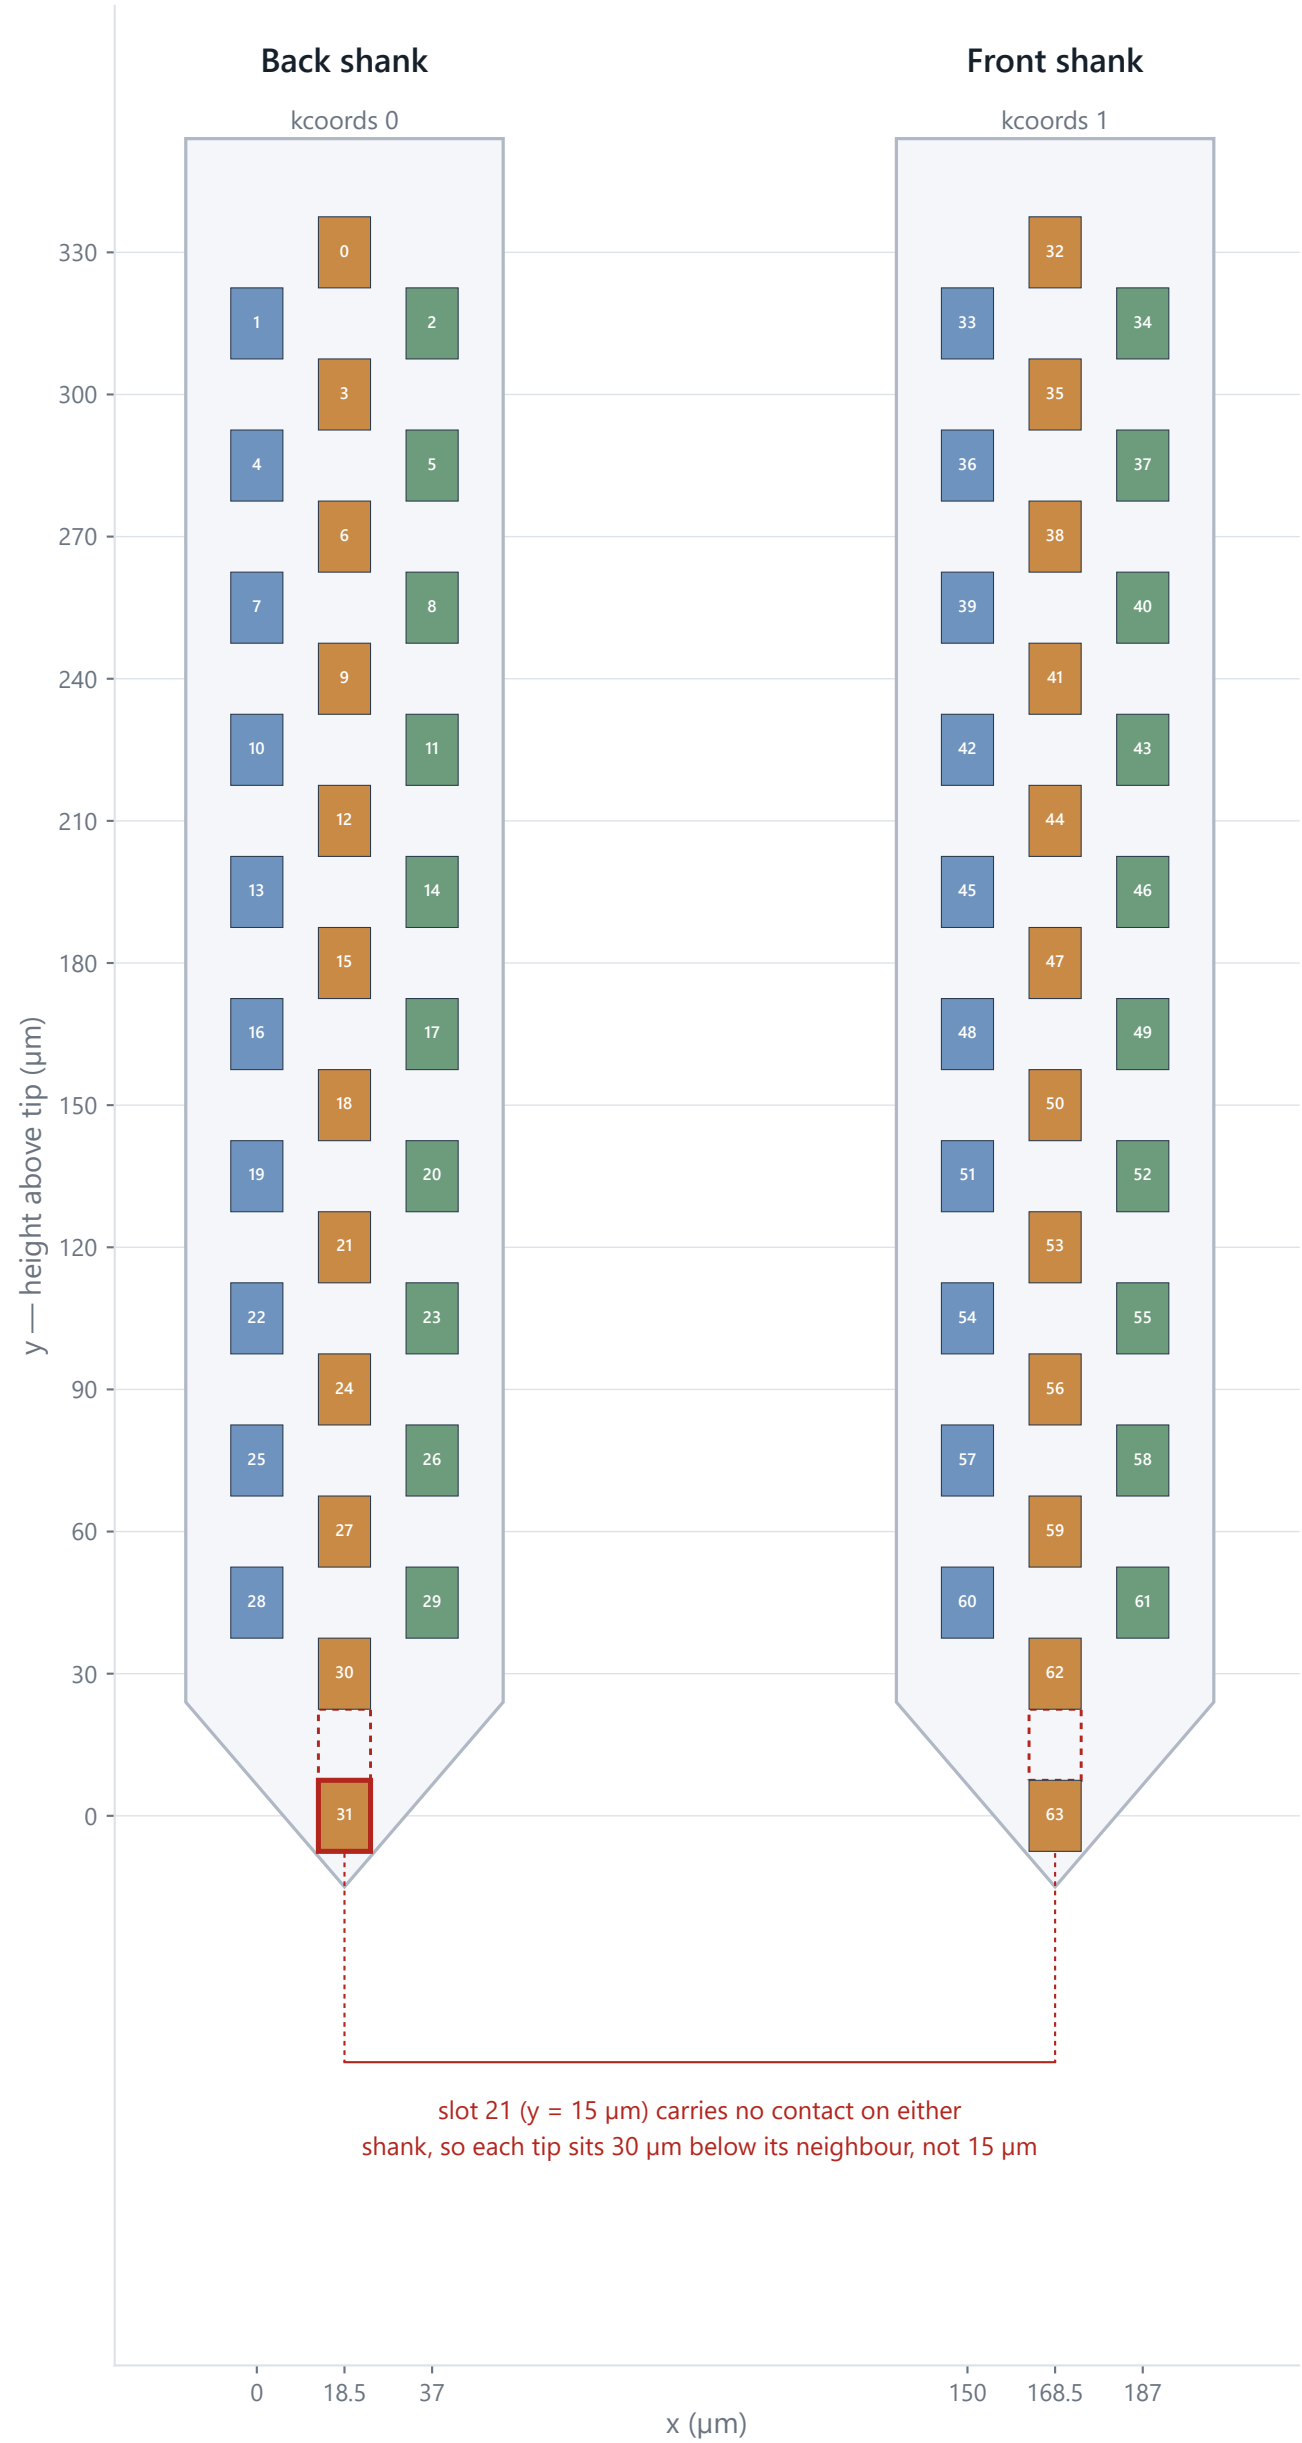

b each block is one Cheetah display window = one physical column of one shank; shaded row = deepest contact, which meets signal first

W1 back shank · centre column · x = 18.5 μm				top ↓ tip
PIN	AD CH	CSC	KS CH	
21	84	1	0	y = 330 μm
43	106	4	3	y = 300 μm
23	86	7	6	y = 270 μm
24	87	10	9	y = 240 μm
30	93	13	12	y = 210 μm
29	92	16	15	y = 180 μm
16	79	19	18	y = 150 μm
37	100	22	21	y = 120 μm
33	96	25	24	y = 90 μm
39	102	28	27	y = 60 μm
40	103	31	30	y = 30 μm
48	60	32	31	y = 0 μm

W3 back shank · left column · x = 0 μm				top ↓ tip
PIN	AD CH	CSC	KS CH	
41	104	2	1	y = 315 μm
42	105	5	4	y = 285 μm
44	107	8	7	y = 255 μm
35	98	11	10	y = 225 μm
36	99	14	13	y = 195 μm
49	112	17	16	y = 165 μm
47	110	20	19	y = 135 μm
45	108	23	22	y = 105 μm
38	101	26	25	y = 75 μm
46	109	29	28	y = 45 μm

W4 back shank · right column · x = 37 μm				top ↓ tip
PIN	AD CH	CSC	KS CH	
32	95	3	2	y = 315 μm
28	91	6	5	y = 285 μm
22	85	9	8	y = 255 μm
26	89	12	11	y = 225 μm
25	88	15	14	y = 195 μm
17	80	18	17	y = 165 μm
19	82	21	20	y = 135 μm
27	90	24	23	y = 105 μm
20	83	27	26	y = 75 μm
18	81	30	29	y = 45 μm

W2 front shank · centre column · x = 168.5 μm				top ↓ tip
PIN	AD CH	CSC	KS CH	
64	127	33	32	y = 330 μm
2	65	36	35	y = 300 μm
62	125	39	38	y = 270 μm
60	123	42	41	y = 240 μm
58	121	45	44	y = 210 μm
56	119	48	47	y = 180 μm
54	117	51	50	y = 150 μm
4	67	54	53	y = 120 μm
6	69	57	56	y = 90 μm
8	71	60	59	y = 60 μm
10	73	63	62	y = 30 μm
12	75	64	63	y = 0 μm

W6 front shank · left column · x = 150 μm				top ↓ tip
PIN	AD CH	CSC	KS CH	
5	68	34	33	y = 315 μm
3	66	37	36	y = 285 μm
1	64	40	39	y = 255 μm
7	70	43	42	y = 225 μm
9	72	46	45	y = 195 μm
11	74	49	48	y = 165 μm
13	76	52	51	y = 135 μm
15	78	55	54	y = 105 μm
31	94	58	57	y = 75 μm
14	77	61	60	y = 45 μm

W5 front shank · right column · x = 187 μm				top ↓ tip
PIN	AD CH	CSC	KS CH	
59	122	35	34	y = 315 μm
61	124	38	37	y = 285 μm
63	126	41	40	y = 255 μm
57	120	44	43	y = 225 μm
55	118	47	46	y = 195 μm
53	116	50	49	y = 165 μm
51	114	53	52	y = 135 μm
34	97	56	55	y = 105 μm
50	113	59	58	y = 75 μm
52	115	62	61	y = 45 μm