


LEVEL 3,4,5



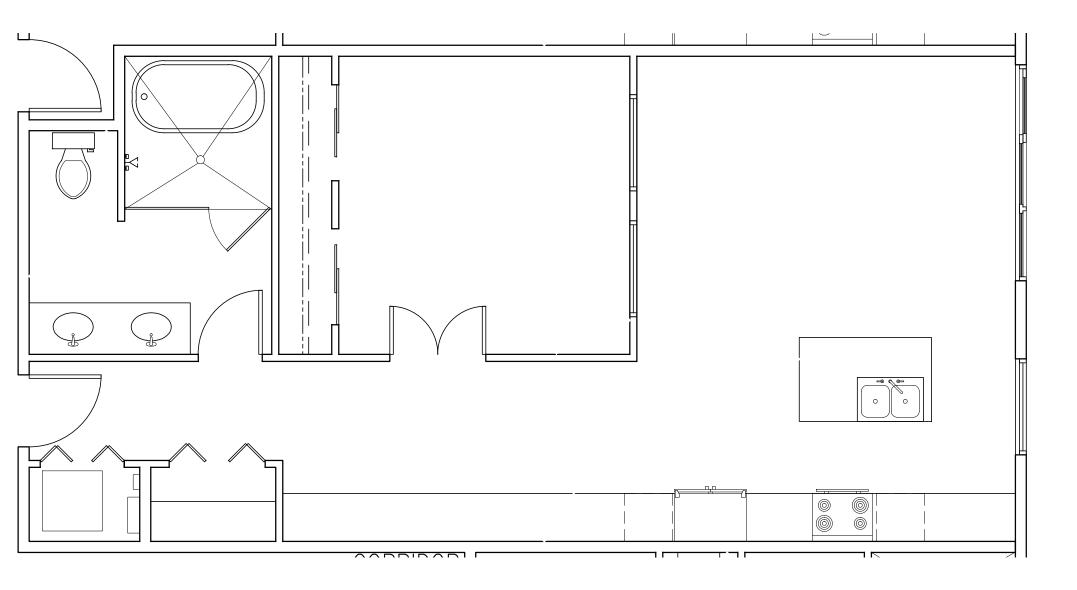

FLOOR PLAN GENERAL NOTES:

. FIELD VERIFY ALL DIMENSIONS PRIOR TO BEGINNING NEW CONSTRUCTION.

- 2. ALL DIMENSIONS ARE TO FACE OF SLAB. FACE OF STUD, & OR EDGE OF STRUCTURAL MEMBER, OR & OF
- OBJECT; U.N.O. REPAIR ANY DAMAGE TO EXISTING SITE CONDITIONS
- DUE TO CONSTRUCTION.
 4. STAGING OF ALL NEW MATERIAL SHALL BE WELL MANAGED IN ORDER NOT TO DISRUPT THE SITE, SITE ACCESS, & OVERALL APPEARANCE TO THE NEIGHBORHOOD.
- CONTRACTOR SHALL FIELD VERIFY ALL EXISTING SITE UTILITIES PRIOR TO CONSTRUCTION & NOTIFY COMPANIES FOR PROPER CUT OFF OF UTILITIES.
- DOOR LOCATION TO BE 4" FROM NEAREST INTERSECTING WALL, OR CENTERED ON WALL IT RESIDES, U.N.O
- THE ARCHITECT OR ENGINEER SHALL NOT BE LIABLE FOR ANY CHANGES MADE BY THE OWNER, CONTRACTOR, INSPECTOR OR ANY OTHER PERSON INVOLVE DURING THE CONSTRUCTION PROCESS, WITHOUT A LETTER OF APPROVAL FROM THE ARCHITECT OR ENGINEER OF RECORD, THE ARCHITECT/ ENGINEER RESERVES THE RIGHT OF APPROVAL OF SUCH CHANGES.
- 8. ALL GLAZING IN DOORS TO BE HUMAN IMPACT RESISTANT PER ANSI Z97-1975.
- 9. REFER TO A7.0 SERIES FOR FINISH SCHEDULE, DOOR SCHEDULE, DOOR/WINDOW TYPES, DOOR/WINDOW DETAILS, & PARTITION TYPES.
- 10. USE 5/8" TYPE X GREEN BOARD (WATER RESISTANT) AT ALL WET AREAS & BEHIND ALL WALLS TO BE FINISHED IN TILE. (UNLESS NOTED OTHERWISE)
- 11. REFER TO SHEETS A2.3, A2.4 AND A2.5 FOR WINDOW LOCATIONS OF UNITS AT LEVELS 3, 4, 5 RESPECTIVELY

FLOOR PLAN KEYED NOTES: NOT ALL KEYED NOTES WILL BE USED ON THIS SHEET

01 2X6 WOOD STUD FRAMING @ 16" O.C.

02 2X4 WOOD STUD FRAMING @ 16" O.C.

03 MASONRY WALL @ 24" AFFF 04 RE: STRUCT

05 METAL LATHE

06 FINISH

07 CONTROLS

08 SHOWER HEAD & CONTROLS

09 WOOD DECK

10 DOUBLE BOWL SINK

11 UTILITY SINK

12 ABOVE

13 RE: MILLWORK 14 CLOSET ROD & SHELF

15 MILLWORK

[16] EQUIPMENT SELECTED BY OWNER, PROVIDED & INSTALLED BY GENERAL CONTRACTOR

17 ADJUSTABLE SHELVING

18 WASHER & DRYER

2500 (PH) 71 COPYRIGHT Drawings and Sprojects or extractorising for tachorisms fo LOFTS STREET (77007 STREET

4606 CENTER SHOUSTON, TX


ARCHITECT: ROMULO CISNERO


NTER


ENGINEER:

REVISIONS: $\sqrt{1}$ 9.15.15 / COH COMMENTS

DATE ISSUED: 01 SEPTEMBER 20

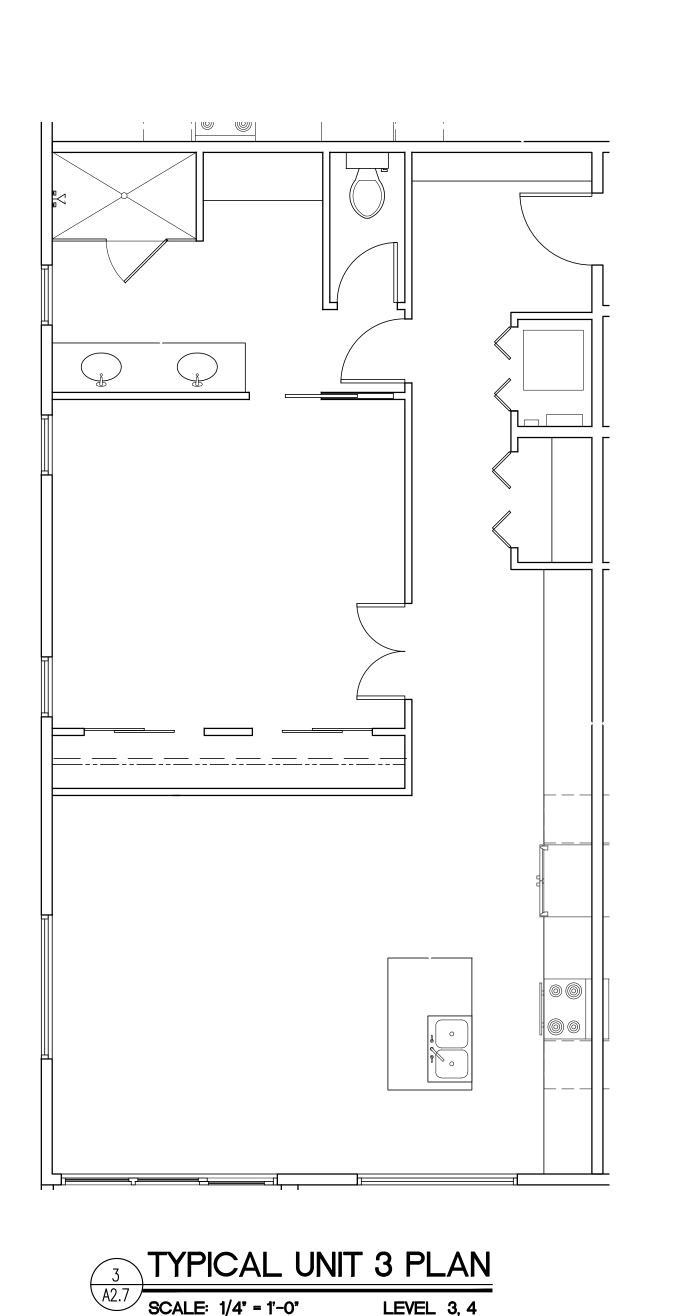

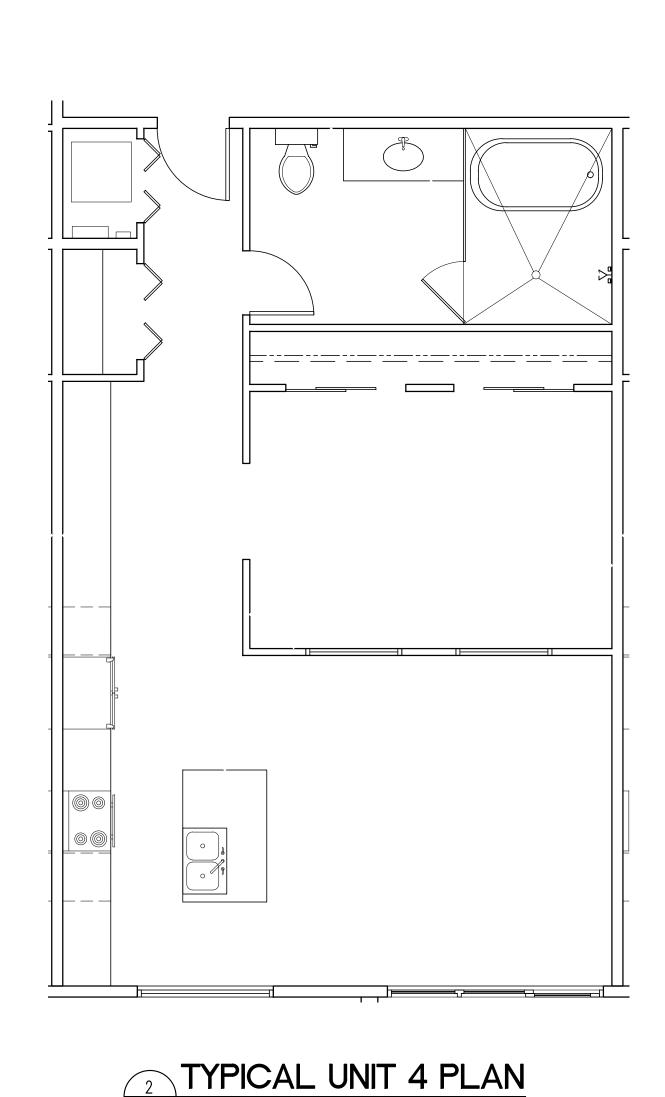

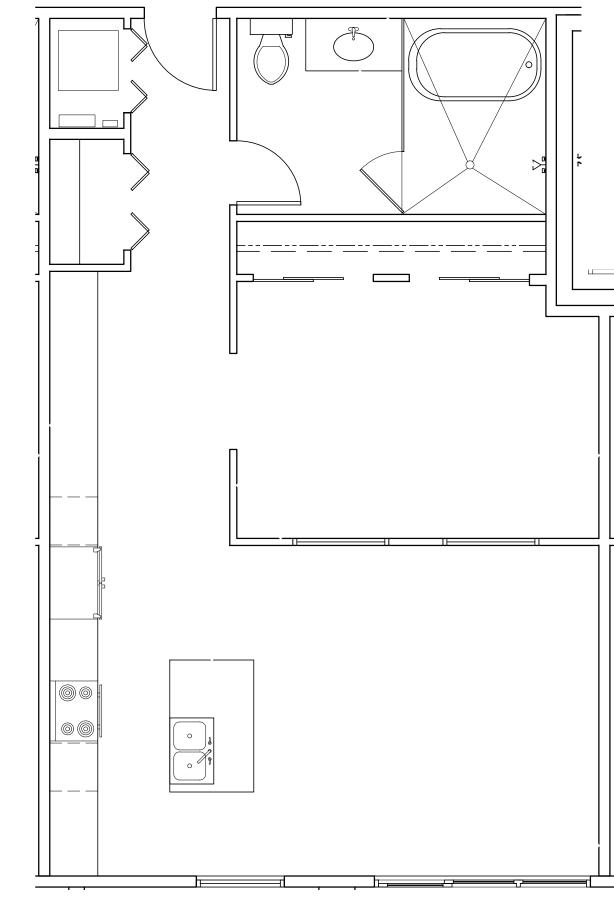

TYPICAL UNIT 5 PLAN

FLOOR PLAN GENERAL NOTES:

I. FIELD VERIFY ALL DIMENSIONS PRIOR TO BEGINNING NEW CONSTRUCTION. 2. ALL DIMENSIONS ARE TO FACE OF SLAB. FACE OF

STUD, & OR EDGE OF STRUCTURAL MEMBER, OR & OF OBJECT; U.N.O.

3. REPAIR ANY DAMAGE TO EXISTING SITE CONDITIONS

DUE TO CONSTRUCTION. 4. STAGING OF ALL NEW MATERIAL SHALL BE WELL MANAGED IN ORDER NOT TO DISRUPT THE SITE, SITE ACCESS, & OVERALL APPEARANCE TO THE NEIGHBORHOOD.

. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING SITE UTILITIES PRIOR TO CONSTRUCTION & NOTIFY

COMPANIES FOR PROPER CUT OFF OF UTILITIES. 6. DOOR LOCATION TO BE 4" FROM NEAREST INTERSECTING WALL, OR CENTERED ON WALL IT

RESIDES, U.N.O THE ARCHITECT OR ENGINEER SHALL NOT BE LIABLE FOR ANY CHANGES MADE BY THE OWNER, CONTRACTOR, INSPECTOR OR ANY OTHER PERSON INVOLVE DURING THE CONSTRUCTION PROCESS, WITHOUT A LETTER OF APPROVAL FROM THE ARCHITECT OR ENGINEER OF RECORD, THE ARCHITECT/ ENGINEER RESERVES THE RIGHT OF APPROVAL OF SUCH 8. ALL GLAZING IN DOORS TO BE HUMAN IMPACT

RESISTANT PER ANSI Z97-1975.

9. REFER TO A7.0 SERIES FOR FINISH SCHEDULE, DOOR SCHEDULE, DOOR/WINDOW TYPES, DOOR/WINDOW DETAILS, & PARTITION TYPES.

10. USE 5/8" TYPE X GREEN BOARD (WATER RESISTANT) AT ALL WET AREAS & BEHIND ALL WALLS TO BE FINISHED IN TILE. (UNLESS NOTED OTHERWISE)

11. REFER TO SHEETS A2.3, A2.4 AND A2.5 FOR WINDOW LOCATIONS OF UNITS AT LEVELS 3, 4, 5 RESPECTIVELY

FLOOR PLAN KEYED NOTES:

NOT ALL KEYED NOTES WILL BE USED ON THIS SHEET 01 2X6 WOOD STUD FRAMING @ 16" O.C. 02 2X4 WOOD STUD FRAMING @ 16" O.C. 03 MASONRY WALL @ 24" AFFF

04 RE: STRUCT

05 METAL LATHE

06 FINISH

07 CONTROLS

08 SHOWER HEAD & CONTROLS

09 WOOD DECK

10 DOUBLE BOWL SINK

11 UTILITY SINK 12 ABOVE

13 RE: MILLWORK

14 CLOSET ROD & SHELF

15 MILLWORK 16 EQUIPMENT SELECTED BY OWNER, PROVIDED & INSTALLED BY GENERAL CONTRACTOR

17 ADJUSTABLE SHELVING

18 WASHFR & DRYFR

OFTS STREET (77007 STREET 4606 CENTER S HOUSTON, TX

2500
(PH) 71
COPYRIGHT
Drawings and 3
projects or ext
responsible for responsible for responsible for responsible for properties or extensions and 3


ARCHITECT: ROMULO CISNERO


ENGINEER:

REVISIONS:


1 1 9.15.15 / COH COMMENTS

DATE ISSUED: 01 SEPTEMBER 201

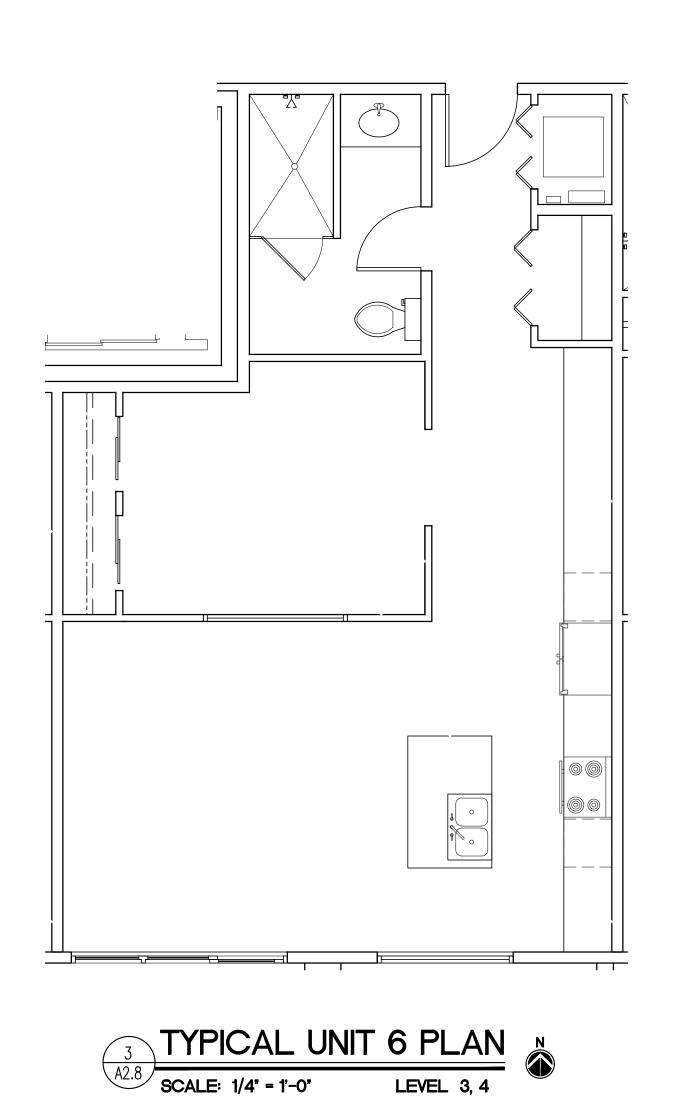

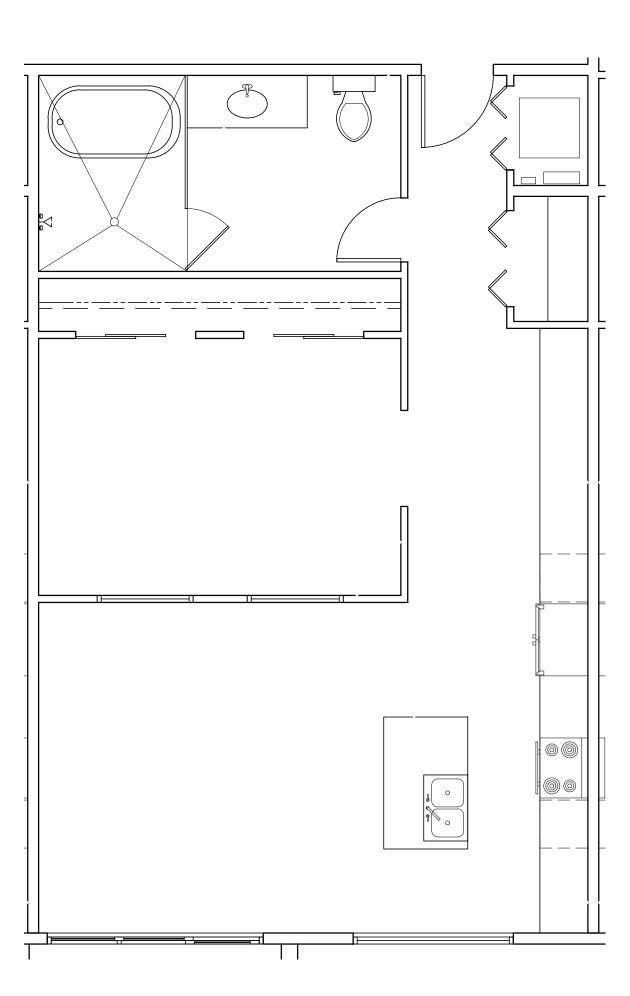



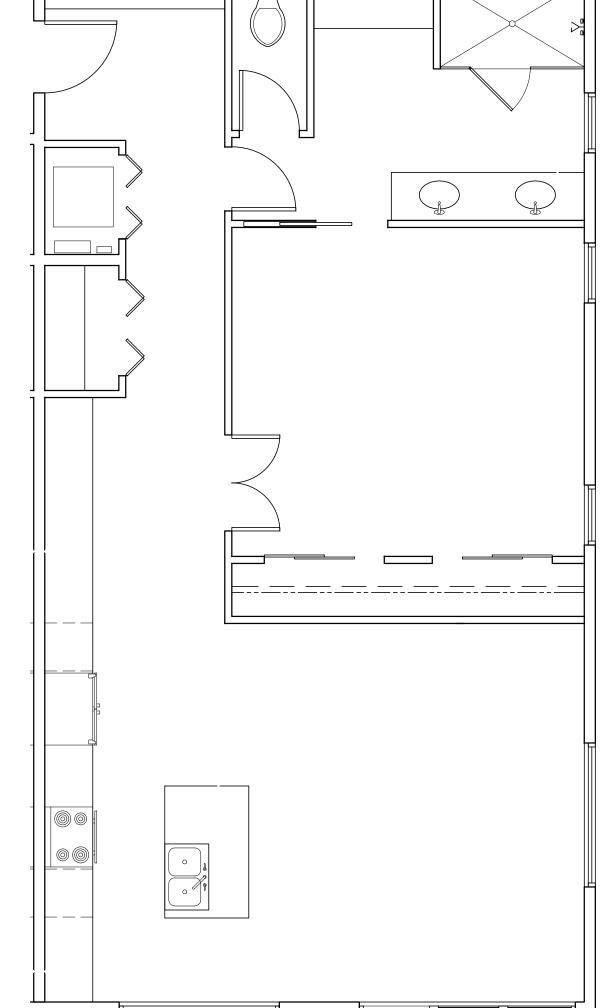

FLOOR PLAN GENERAL NOTES: 1. FIELD VERIFY ALL DIMENSIONS PRIOR TO BEGINNING

- NEW CONSTRUCTION. 2. ALL DIMENSIONS ARE TO FACE OF SLAB. FACE OF STUD, & OR EDGE OF STRUCTURAL MEMBER, OR & OF OBJECT; U.N.O.
- 3. REPAIR ANY DAMAGE TO EXISTING SITE CONDITIONS DUE TO CONSTRUCTION.
- 4. STAGING OF ALL NEW MATERIAL SHALL BE WELL MANAGED IN ORDER NOT TO DISRUPT THE SITE, SITE ACCESS, & OVERALL APPEARANCE TO THE NEIGHBORHOOD.
- 5. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING SITE UTILITIES PRIOR TO CONSTRUCTION & NOTIFY COMPANIES FOR PROPER CUT OFF OF UTILITIES.
- INTERSECTING WALL, OR CENTERED ON WALL IT RESIDES, U.N.O 7. THE ARCHITECT OR ENGINEER SHALL NOT BE LIABLE FOR ANY CHANGES MADE BY THE OWNER, CONTRACTOR, INSPECTOR OR ANY OTHER PERSON INVOLVE DURING THE CONSTRUCTION PROCESS,

WITHOUT A LETTER OF APPROVAL FROM THE ARCHITECT OR ENGINEER OF RECORD, THE ARCHITECT/ ENGINEER RESERVES THE RIGHT OF APPROVAL OF SUCH

8. ALL GLAZING IN DOORS TO BE HUMAN IMPACT

6. DOOR LOCATION TO BE 4" FROM NEAREST

- RESISTANT PER ANSI Z97-1975. 9. REFER TO A7.0 SERIES FOR FINISH SCHEDULE, DOOR SCHEDULE, DOOR/WINDOW TYPES, DOOR/WINDOW DETAILS, & PARTITION TYPES.
- 10. USE 5/8" TYPE X GREEN BOARD (WATER RESISTANT) AT ALL WET AREAS & BEHIND ALL WALLS TO BE FINISHED IN TILE. (UNLESS NOTED OTHERWISE)
- 11. REFER TO SHEETS A2.3, A2.4 AND A2.5 FOR WINDOW LOCATIONS OF UNITS AT LEVELS 3, 4, 5 RESPECTIVELY

FLOOR PLAN KEYED NOTES:

NOT ALL KEYED NOTES WILL BE USED ON THIS SHEET 01 2X6 WOOD STUD FRAMING @ 16" O.C. 02 2X4 WOOD STUD FRAMING @ 16" O.C.

03 MASONRY WALL @ 24" AFFF 04 RE: STRUCT

05 METAL LATHE 06 FINISH

> 07 CONTROLS 08 SHOWER HEAD & CONTROLS

09 WOOD DECK 10 DOUBLE BOWL SINK

11 UTILITY SINK 12 ABOVE

13 RE: MILLWORK 14 CLOSET ROD & SHELF

15 MILLWORK 16 EQUIPMENT SELECTED BY OWNER, PROVIDED & INSTALLED

17 ADJUSTABLE SHELVING

2500
(PH) 71
COPYRIGHT
Drawings and 3
projects or ext
responsible for responsible for responsible for responsible for properties or extensions and 3

STREET (77007

STREET

ARCHITECT: ROMULO CISNERO

ENGINEER:


REVISIONS:

9.15.15 / COH COMMENTS


DATE ISSUED: 01 SEPTEMBER 20

A2.8

TYPICAL UNIT 8 PLAN

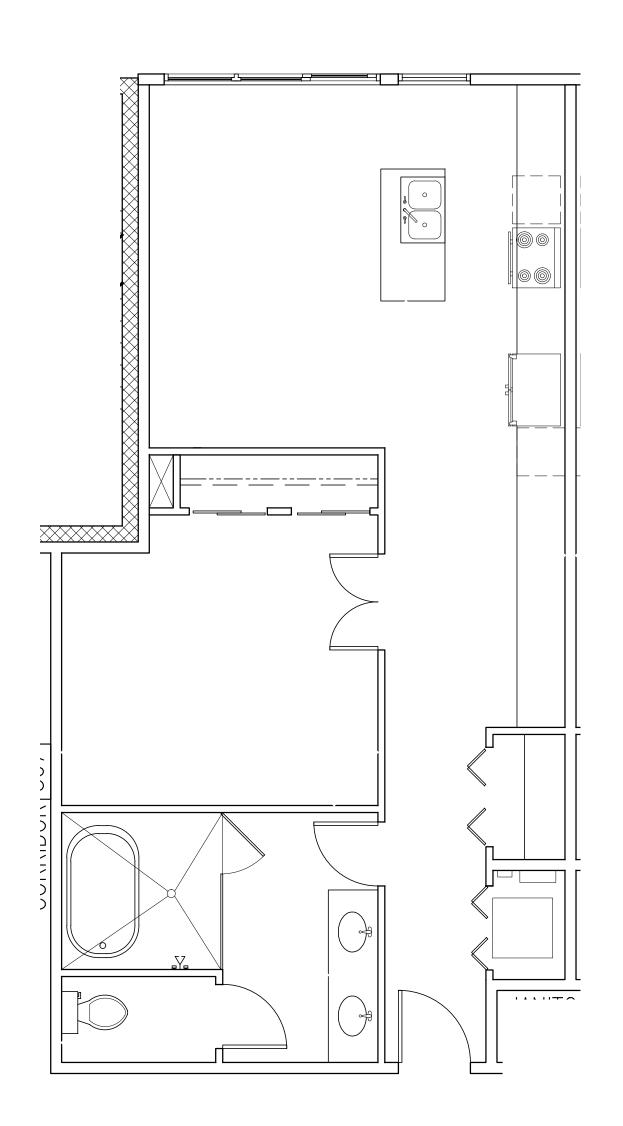



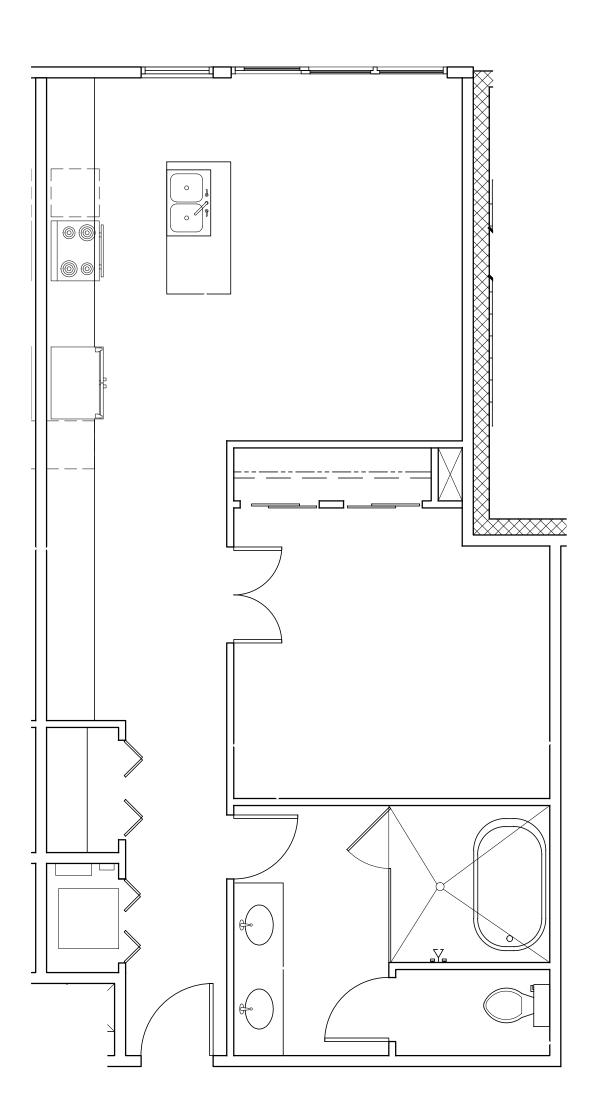



FLOOR PLAN GENERAL NOTES:

1. FIELD VERIFY ALL DIMENSIONS PRIOR TO BEGINNING NEW CONSTRUCTION.

- 2. ALL DIMENSIONS ARE TO FACE OF SLAB. FACE OF STUD, & OR EDGE OF STRUCTURAL MEMBER, OR & OF OR JECT: JUN O
- OBJECT; U.N.O.

 3. REPAIR ANY DAMAGE TO EXISTING SITE CONDITIONS
- DUE TO CONSTRUCTION.

 4. STAGING OF ALL NEW MATERIAL SHALL BE WELL
 MANAGED IN ORDER NOT TO DISRUPT THE SITE, SITE
 ACCESS, & OVERALL APPEARANCE TO THE
- NEIGHBORHOOD.

 5. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING SITE UTILITIES PRIOR TO CONSTRUCTION & NOTIFY COMPANIES FOR PROPER CUT OFF OF UTILITIES.

 6. DOOR LOCATION TO BE 4" FROM NEAREST
- INTERSECTING WALL, OR CENTERED ON WALL IT
 RESIDES, U.N.O

 7. THE ARCHITECT OR ENGINEER SHALL NOT BE LIABLE
 FOR ANY CHANGES MADE BY THE OWNER,
 CONTRACTOR, INSPECTOR OR ANY OTHER PERSON
 INVOLVE DURING THE CONSTRUCTION PROCESS,
 WITHOUT A LETTER OF APPROVAL FROM THE ARCHITECT
 OR ENGINEER OF RECORD, THE ARCHITECT/ ENGINEER
 RESERVES THE RIGHT OF APPROVAL OF SUCH
- CHANGES.

 8. ALL GLAZING IN DOORS TO BE HUMAN IMPACT RESISTANT PER ANSI Z97-1975.
- 9. REFER TO A7.0 SERIES FOR FINISH SCHEDULE, DOOR SCHEDULE, DOOR/WINDOW TYPES, DOOR/WINDOW DETAILS, & PARTITION TYPES.
- 10. USE 5/8" TYPE X GREEN BOARD (WATER RESISTANT)
 AT ALL WET AREAS & BEHIND ALL WALLS TO BE
 FINISHED IN TILE. (UNLESS NOTED OTHERWISE)
- 11. REFER TO SHEETS A2.3, A2.4 AND A2.5 FOR WINDOW LOCATIONS OF UNITS AT LEVELS 3, 4, 5 RESPECTIVELY

FLOOR PLAN KEYED NOTES:

NOT ALL KEYED NOTES WILL BE USED ON THIS SHEET

01 2X6 WOOD STUD FRAMING @ 16" O.C.

02 2X4 WOOD STUD FRAMING @ 16" O.C.

03 MASONRY WALL @ 24" AFFF
04 RE: STRUCT

05 METAL LATHE

06 FINISH

07 CONTROLS

08 SHOWER HEAD & CONTROLS

09 WOOD DECK
10 DOUBLE BOWL SINK

11 UTILITY SINK

12 ABOVE

13 RE: MILLWORK

14 CLOSET ROD & SHELF

16 EQUIPMENT SELECTED BY OWNER, PROVIDED & INSTALLED BY GENERAL CONTRACTOR

17 ADJUSTABLE SHELVING

DESIGN STI TECTS LLC

2500 Summer St. Suite 1 (PH) 713–520–7745

COPYRIGHT 2015

Drawings and Specifications as instruments of service are and sha projects or extensions to this project except by agreement in write responsible for confirming and correlating dimensions at job site; t

NTER STREET LOFTS
4606 CENTER STREET
HOUSTON, TX 77007


ARCHITECT: ROMULO CISNERO

ENGINEER:

REVISIONS:

1 9.15.15 / COH COMMENTS

DATE ISSUED: 01 SEPTEMBER 20

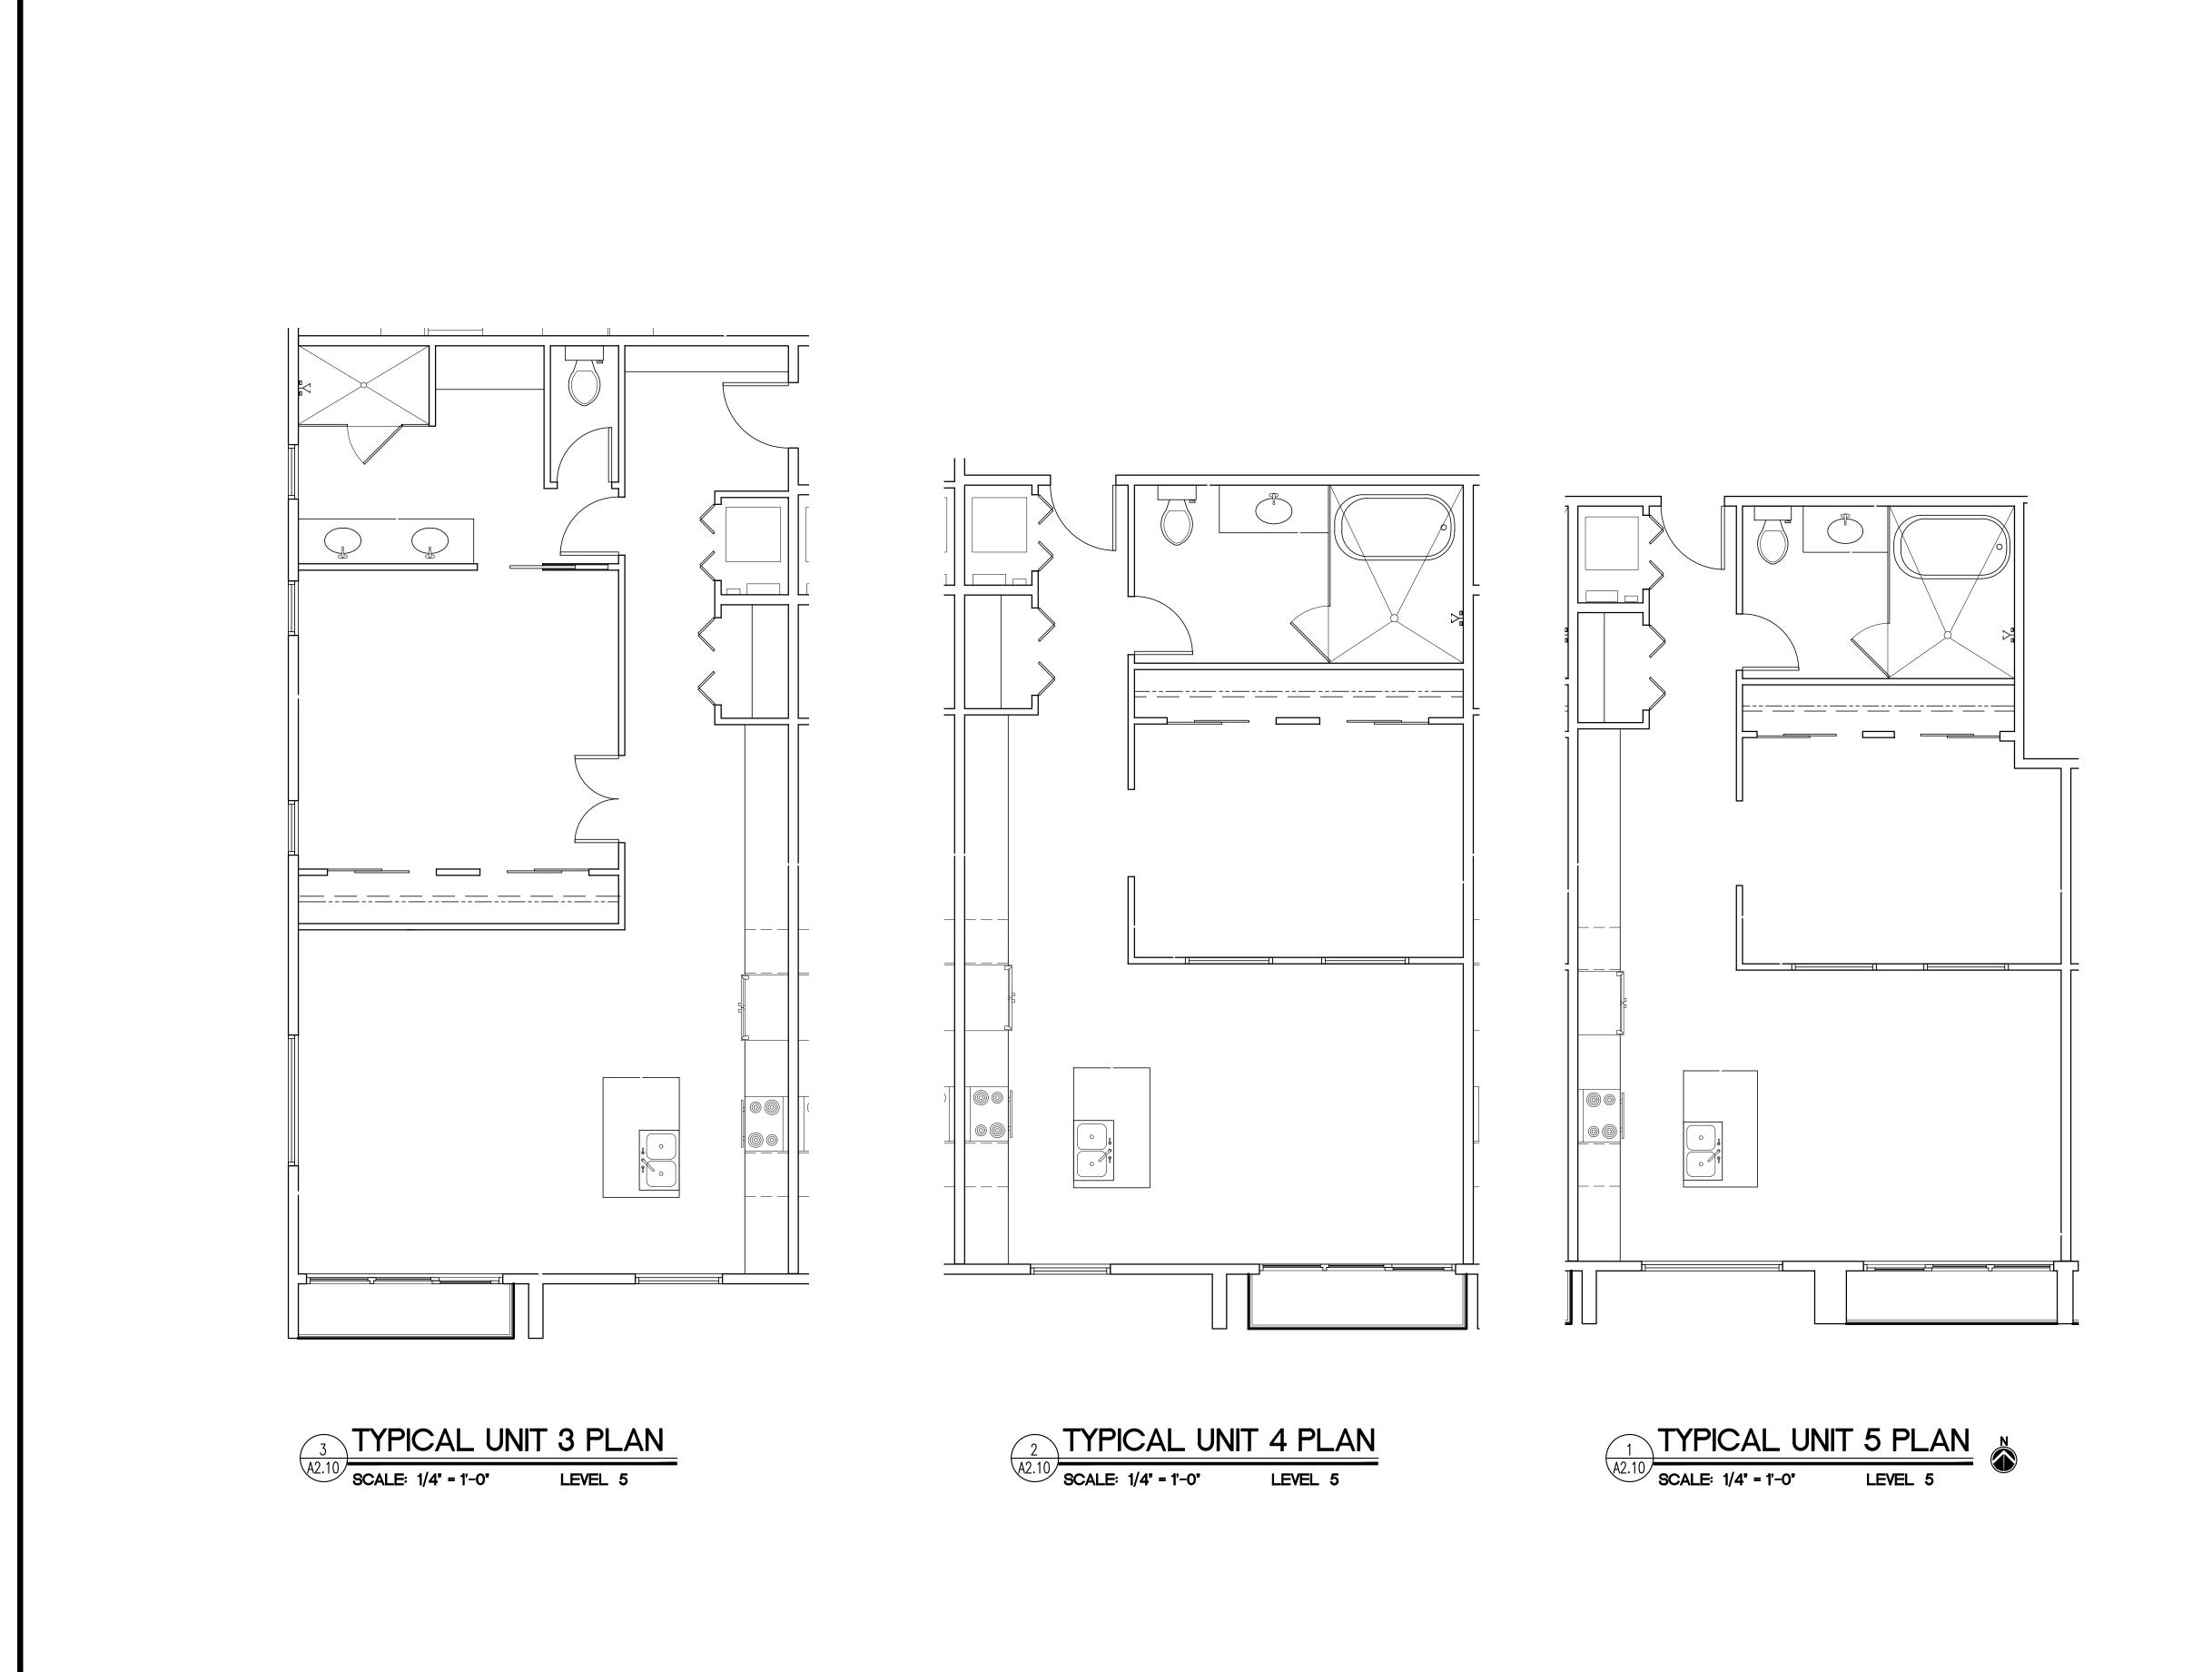

FLOOR PLAN GENERAL NOTES:

1. FIELD VERIFY ALL DIMENSIONS PRIOR TO BEGINNING NEW CONSTRUCTION.

- 2. ALL DIMENSIONS ARE TO FACE OF SLAB. FACE OF STUD, & OR EDGE OF STRUCTURAL MEMBER, OR & OF
- OBJECT; U.N.O. 3. REPAIR ANY DAMAGE TO EXISTING SITE CONDITIONS DUE TO CONSTRUCTION.
- 4. STAGING OF ALL NEW MATERIAL SHALL BE WELL MANAGED IN ORDER NOT TO DISRUPT THE SITE, SITE ACCESS, & OVERALL APPEARANCE TO THE NEIGHBORHOOD.
- 5. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING SITE UTILITIES PRIOR TO CONSTRUCTION & NOTIFY COMPANIES FOR PROPER CUT OFF OF UTILITIES. 6. DOOR LOCATION TO BE 4" FROM NEAREST
- INTERSECTING WALL, OR CENTERED ON WALL IT RESIDES, U.N.O 7. THE ARCHITECT OR ENGINEER SHALL NOT BE LIABLE
- FOR ANY CHANGES MADE BY THE OWNER, CONTRACTOR, INSPECTOR OR ANY OTHER PERSON INVOLVE DURING THE CONSTRUCTION PROCESS, WITHOUT A LETTER OF APPROVAL FROM THE ARCHITECT OR ENGINEER OF RECORD, THE ARCHITECT/ ENGINEER RESERVES THE RIGHT OF APPROVAL OF SUCH CHANGES.
- 8. ALL GLAZING IN DOORS TO BE HUMAN IMPACT RESISTANT PER ANSI Z97-1975.
- 9. REFER TO A7.0 SERIES FOR FINISH SCHEDULE, DOOR SCHEDULE, DOOR/WINDOW TYPES, DOOR/WINDOW DETAILS, & PARTITION TYPES.
- 10. USE 5/8" TYPE X GREEN BOARD (WATER RESISTANT) AT ALL WET AREAS & BEHIND ALL WALLS TO BE FINISHED IN TILE. (UNLESS NOTED OTHERWISE)
- 11. REFER TO SHEETS A2.3, A2.4 AND A2.5 FOR WINDOW LOCATIONS OF UNITS AT LEVELS 3, 4, 5 RESPECTIVELY

FLOOR PLAN KEYED NOTES: NOT ALL KEYED NOTES WILL BE USED ON THIS SHEET

01 2X6 WOOD STUD FRAMING @ 16" O.C. 02 2X4 WOOD STUD FRAMING @ 16" O.C.

03 MASONRY WALL @ 24" AFFF 04 RE: STRUCT

05 METAL LATHE

06 FINISH

07 CONTROLS

08 SHOWER HEAD & CONTROLS

09 WOOD DECK 10 DOUBLE BOWL SINK

11 UTILITY SINK

12 ABOVE

13 RE: MILLWORK

14 CLOSET ROD & SHELF 15 MILLWORK

16 EQUIPMENT SELECTED BY OWNER, PROVIDED & INSTALLED BY GENERAL CONTRACTOR

17 ADJUSTABLE SHELVING 18 WACHER & DRYFR

2500 (PH) 71 COPYRIGHT projects or extra responsible for tachnismise for tachn

STREET (77007 4606 CENTER 9 HOUSTON, TX

OFTS.

STREET


ARCHITECT: ROMULO CISNERO

ENGINEER:

REVISIONS:

 $\sqrt{1}$ 9.15.15 / COH COMMENTS

DATE ISSUED: 01 SEPTEMBER 20

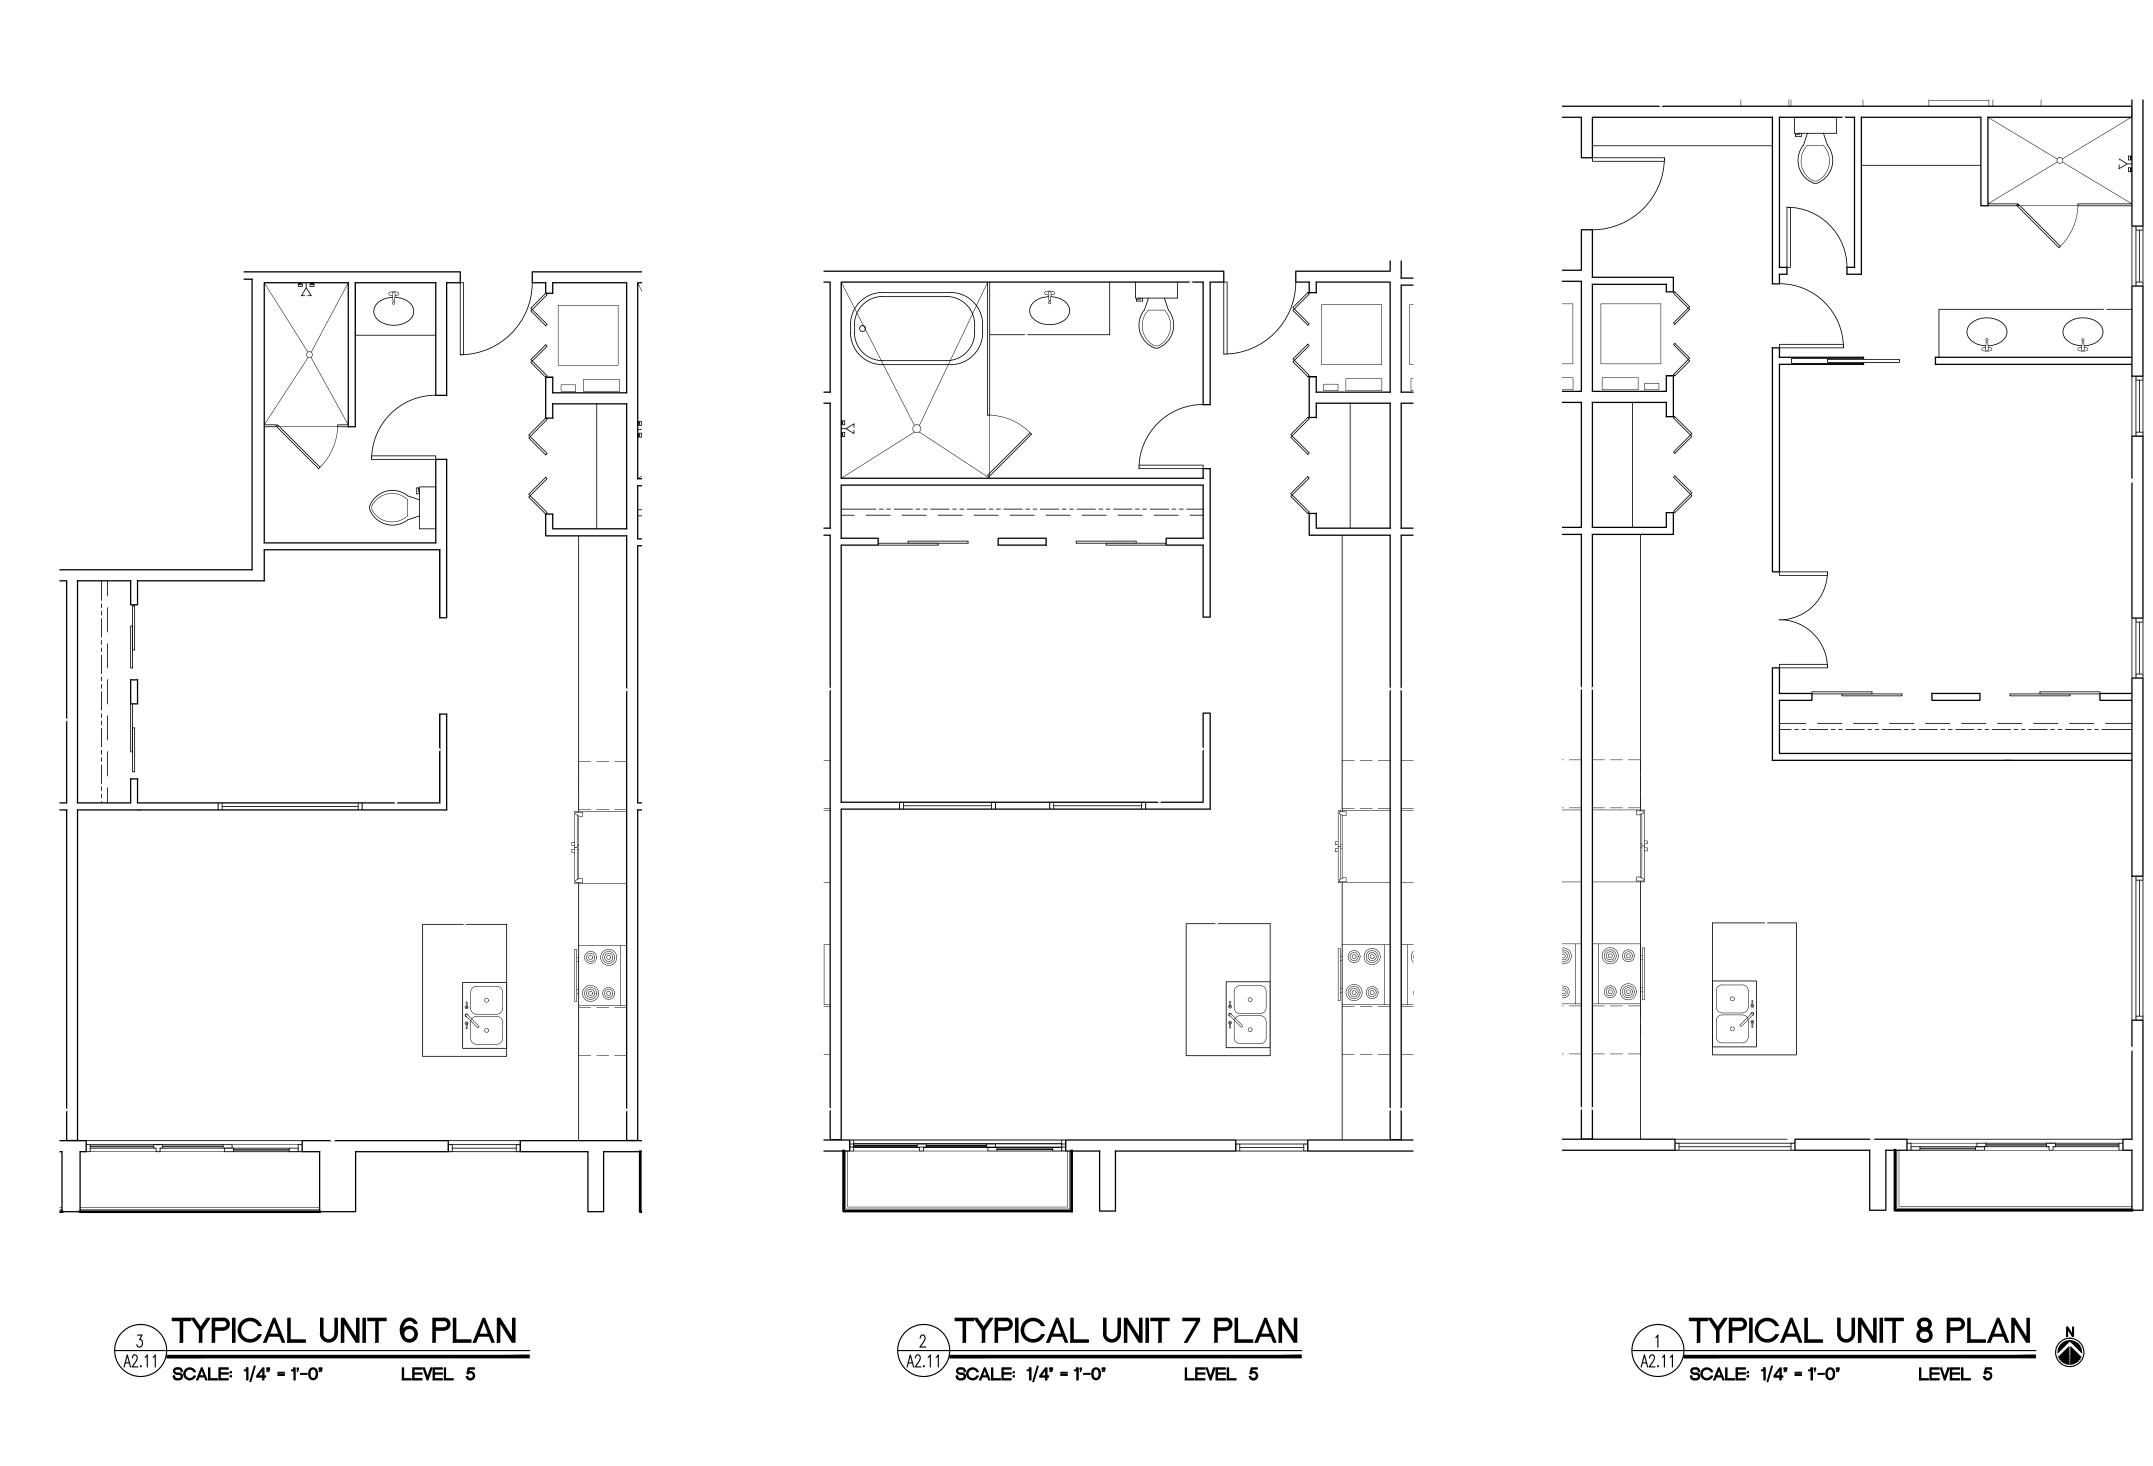

FLOOR PLAN GENERAL NOTES:

1. FIELD VERIFY ALL DIMENSIONS PRIOR TO BEGINNING NEW CONSTRUCTION.

- 2. ALL DIMENSIONS ARE TO FACE OF SLAB. FACE OF STUD, & OR EDGE OF STRUCTURAL MEMBER, OR & OF
- OBJECT; U.N.O. 3. REPAIR ANY DAMAGE TO EXISTING SITE CONDITIONS
- DUE TO CONSTRUCTION. 4. STAGING OF ALL NEW MATERIAL SHALL BE WELL MANAGED IN ORDER NOT TO DISRUPT THE SITE, SITE ACCESS, & OVERALL APPEARANCE TO THE
- 5. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING SITE UTILITIES PRIOR TO CONSTRUCTION & NOTIFY COMPANIES FOR PROPER CUT OFF OF UTILITIES.
- 6. DOOR LOCATION TO BE 4" FROM NEAREST INTERSECTING WALL, OR CENTERED ON WALL IT RESIDES, U.N.O

NEIGHBORHOOD.

- 7. THE ARCHITECT OR ENGINEER SHALL NOT BE LIABLE FOR ANY CHANGES MADE BY THE OWNER, CONTRACTOR, INSPECTOR OR ANY OTHER PERSON INVOLVE DURING THE CONSTRUCTION PROCESS, WITHOUT A LETTER OF APPROVAL FROM THE ARCHITECT OR ENGINEER OF RECORD, THE ARCHITECT/ ENGINEER RESERVES THE RIGHT OF APPROVAL OF SUCH CHANGES.
- 8. ALL GLAZING IN DOORS TO BE HUMAN IMPACT RESISTANT PER ANSI Z97-1975.
- 9. REFER TO A7.0 SERIES FOR FINISH SCHEDULE, DOOR SCHEDULE, DOOR/WINDOW TYPES, DOOR/WINDOW DETAILS, & PARTITION TYPES.
- 10. USE 5/8" TYPE X GREEN BOARD (WATER RESISTANT) AT ALL WET AREAS & BEHIND ALL WALLS TO BE FINISHED IN TILE. (UNLESS NOTED OTHERWISE)
- 11. REFER TO SHEETS A2.3, A2.4 AND A2.5 FOR WINDOW LOCATIONS OF UNITS AT LEVELS 3, 4, 5 RESPECTIVELY

FLOOR PLAN KEYED NOTES: NOT ALL KEYED NOTES WILL BE USED ON THIS SHEET

01 2X6 WOOD STUD FRAMING @ 16" O.C. 02 2X4 WOOD STUD FRAMING @ 16" O.C.

03 MASONRY WALL @ 24" AFFF 04 RE: STRUCT

05 METAL LATHE

06 FINISH

07 CONTROLS 08 SHOWER HEAD & CONTROLS

09 WOOD DECK 10 DOUBLE BOWL SINK

11 UTILITY SINK

12 ABOVE 13 RE: MILLWORK

14 CLOSET ROD & SHELF 15 MILLWORK

[16] EQUIPMENT SELECTED BY OWNER, PROVIDED & INSTALLED BY GENERAL CONTRACTOR

17 ADJUSTABLE SHELVING 18 WASHER & DRYER

2500 (PH) 71 COPYRIGHT projects or extra responsible for tachnismise for tachn

OFTS. STREET (77007 4606 CENTER 9 HOUSTON, TX

STREET

ARCHITECT: ROMULO CISNERO

ENGINEER:

REVISIONS:

1 9.15.15 / COH COMMENTS

DATE ISSUED: 01 SEPTEMBER 20