



VISHWAKARMA[®]
TECHNOENERGY PVT.LTD.

Air cooled diesel engine

It is a robust 10 HP diesel engine featuring 550 CC displacement and 3000 RPM speed, engineered with a durable 2-stroke air-cooled system for agricultural and industrial machinery applications. Equipped with a 5.5 liter fuel tank and 600–700 g/kW fuel consumption, it delivers strong torque, stable performance, reliable operation, long service life, and consistent power under demanding continuous working conditions.

It is an air-cooled, vertical high-speed diesel engine known for its reliability and fuel efficiency. It is a versatile prime mover suitable for powering generators, water pumps, and various industrial machinery.



Machine views

- Product front view is presented in the image


This image shows the front view of the flywheel as well as other features.



Machine views

- Product Right side view is presented in the image

This image shows the Right side view of the flywheel as well the RR unit.

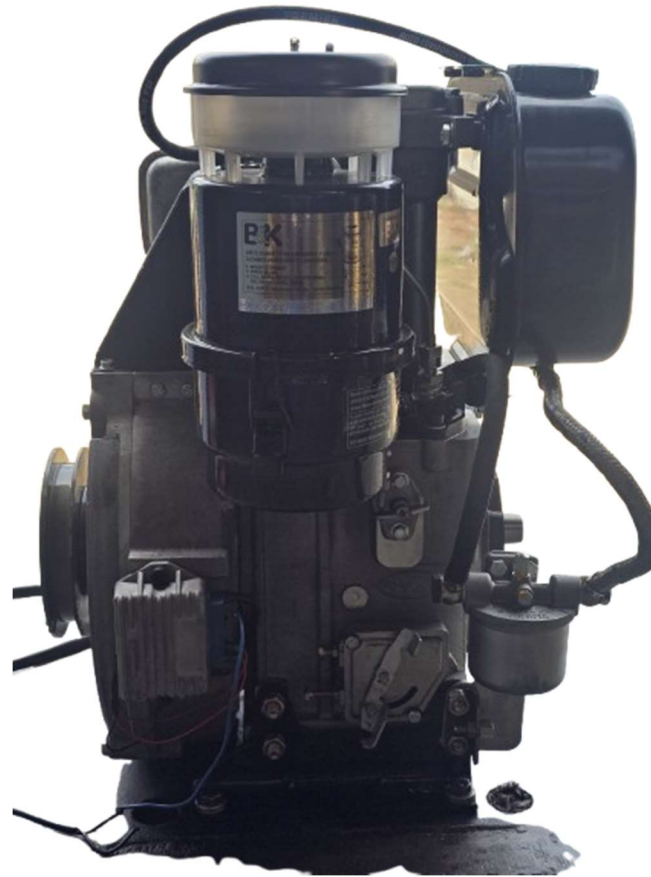

Machine views

- Product Back side view is presented in the image

This image shows the Right side view of the output shaft as well the fuel tank and oil filter.



Key feature

Item	LFD186F/FA
Engine Type	Single cylinder,4-stroke ,air cooled diesel engine
Combusion System	Direct Injection
Bore x Stroke(mm)	86x70 / 86x72
Suction Height(m)	406/418
Engine Speed(rpm)	3000
Power Output(hp)	9/10
Power Take Off	Crankshaft or Camshaft (camshaft PTO rpm is 1/2)
Start System	Recoil or Electric start
Fuel Tank Capacity (L)	5.5
Lube Oil Capacity(L)	1.65
Packing Dimension(L x W x H)(mm)	480x420x530
Net Weight(kg)	48
Gross Weight(kg)	53





VISHWAKARMA[®]
TECHNOENERGY PVT.LTD.