



ÉCOLE POLYTECHNIQUE
FÉDÉRALE DE LAUSANNE

MT MA1 - PROJET DE SEMESTRE

China Hardware Innovation Camp - Vesta

Engineering Report

Jonathan BREGNARD,
Igor AYRTON

juin 2015

Responsables:
Prof. M. Bouri

Table des matières

1	Introduction	1
2	Problem and Solution	2
2.1	Problem	2
2.2	Solution	2
2.3	Vesta tab	2
3	Value Proposition and Buisness Model	3
3.1	Value Proposition	3
3.2	Buisness model	3
3.3	User tests	3
4	Mechanical design	4
5	Materials	5
6	Hardware	6
6.1	Beaglebone Black	6
6.2	Screen and Touchscreen	6
6.2.1	Screen	6
6.2.2	Touchscreen	7
6.2.3	Backlight	7
6.3	Wireless Communication	7
6.3.1	Wlan	7
6.3.2	Bluetooth	7
6.3.3	Power management	7
6.4	Front LED	7
6.5	Power management	7
6.6	Batteries and charger	7
6.7	PCB	7
6.8	Cost estimates	7
7	Software	8
7.1	Operating system	8
7.1.1	Drivers	9
7.1.2	Display	9
7.2	Website	10
7.2.1	Webpage	10
7.2.2	Database and XML parsing	10
7.3	Vesta software	11
7.3.1	Overall operations	11
7.3.2	Graphical interface	11
8	Next steps	13
9	Conclusion	14

1 Introduction

This semester project takes part of the CHIC2015 which is a new project initiated at EPFL by Marc Laperrouza. The goal of this new project is for students develop a project from idea to production in a semester. Indeed a trip to Shenzhen in China is programmed following the end of the semester(july). We are heading to a prototyping facility ther called Seedstudio. They mainly do pcb prototyping but they also mill and 3d print parts.

Three groups of 5 people are created after a brainstorming week-end at the beggining of the semester with for each group one HEC (economy) student, one ECAL (industrial design) student and three engineers from EPFL. For the project presented in this report, two engineers are from microengineering and one is from material science.

After the brainstorming week-end, the rough idea was to connect elderly people to their families with an easy to use electronic device.

2 Problem and Solution

In this section we will lay out the problematic we wanted to adress during this project. Our chosen solution will be introduced and described.

2.1 Problem

The first part of the project was to define what are the old people and young people needs. The goal is to connect the elderly to their families. To determine what are the young people needs, a quiz(survey) was put on internet to ask how young people would like to discuss with their grand parents. The quiz contained the following questions :

- How often do you discuss with your grand parents ?
- What is the best way to do it ? Social network, phone call, sms, visit them. . .
- ...

Most of them wanted to have more contacts with their grand parents but not with the actuals social networks available (facebook, twitter, instagram, google+).

To define what old people needs, a visit in an EMS was organised and some questions about what they want and what they are able to do were asked to them and also some technical questions were asked to the nurses.

The questions to the nurses were more about the facilities old people have with new technologies. The results that came out of the discussion was that the old people don't ear well sounds and are not able to define where the song is coming so putting an alarm on the device wouldn't be a good idea. The interface has to be as simple as possible because they are lost if there are too many options. The device has to be big enough and shouldn't break after a shock. The text on the device has to be big enough to be read by old people.

2.2 Solution

Different solutions were imagined. A device that connects to the TV with HDMI and display pictures, messages and videos on it.

A device that connects to the web with a 3G chip (don't need the wifi and is more portable) or a device that contains only a wifi chip.

A device with a touch screen or only a screen. With physical buttons or not.

2.3 Vesta tab

The Vesta tab is a tablet oriented towards the elderly. It has a capacitive touch screen, a wifi and bluetooth connection and a unique casing. The main usage at the moment is receiving and displaying pictures and text sent by the younger family via the dedicated website. As soon as a new image or text is received an LED blinks to inform the user of new content. The interface is designed to be very user friendly and easy to use.

3 Value Proposition and Buisness Model

3.1 Value Proposition

3.2 Buisness model

3.3 User tests

4 Mechanical design

5 Materials

6 Hardware

This section is dedicated to show all the electronic components we chose and how they work together. As described earlier the PCB containing all the components will be manufactured by Seeedstudio. They manufacture PCBs with other hardware components and they sell quite a number of different breakout boards and other developpement parts. A request made by CHIC managing team was to source as many components as possible at Seeedstudio. Of course not all components we needed were available by them so some of the components are from different sources.

Hardware :

- Beaglebone black, will be further mentioned as BBB
- SD card (containing the Operating System)
- PCB
- Wl1835mod WIFI and bluetooth module
- Capacitive touch screen
- ADXL-345 accelerometer
- Some other tension regulators and a battery drive

6.1 Beaglebone Black

The BBB is an open-hardware microcomputer very famous for development. It uses an ARM processor from Texas Instruments, the AM335X. It is clocked at 1GHz.

measurement N°	CW [mNm]	CCW [mNm]
1	2.24e-4	-6.32e-4
2	2.073e-4	-6.39e-4
3	2.72e-4	-6.64e-4
4	2.46e-4	-6.46e-4
5	2.72e-4	-6.64e-4
mean	2.44e-4	-6.49e-4

TABLE 1 – Dry friction torque measurement

6.2 Screen and Touchscreen

We first ordered a resistive touchscreen BBB cape available from seeedstudio to see how its was made and to see if the resistive technology was applicable to our project. We quickly realised that the resistive tuchscreen was not very adapted to manipulate photos. Especially the very well known “swipe” geasture to move from one photo to another was impossible to do with the resistive touchscreen. So we looked for a similar screen but one using a capacitive touchscreen. We started by looking on chinese sites which had the cheapest screens of course. But the cheap chinese screens were lacking documentation. At the time we were unfamiliar with the interface the screens used and we needed at least a datasheet to get going. Finally we chose a screen we found on Mouser which had good documentation and especially there was an existing driver for the touchscreen IC in the linux kernel we were going to use.

6.2.1 Screen

At the current state of our prototype the main function is to view images Table with screen specs.

6.2.2 Touchscreen

6.2.3 Backlight

6.3 Wireless Communication

6.3.1 Wlan

6.3.2 Bluetooth

6.3.3 Power management

6.4 Front LED

The LED is there to inform the user of a new message. Therefor it could be quite low power. Seedstudio only had an RGB LED which we ordered although for the final led we will use is a warm white single color LED.

We want it to flash in a heartbeat patern. This is achieved by using a PWM pin of the BBB

6.5 Power management

6.6 Batteries and charger

6.7 PCB

6.8 Cost estimates

7 Software

The software of this project contains 3 parts :

- The operating system configuration and modification to be fully compatible with the hardware used.
- The website that is used by the young users to send pictures and messages to the old users.
- The Vesta tab software that is used on the tablet to display the different messages and pictures received by the old users.

The figure 7.1 shows the interactions between the website and the Vesta software on the tablet. All the files are stored on the website on the mySql database. When the pictures are sent, the vesta tablet receives a message and can open/display it. The vesta software on the tablet works on a linux OS that manages the hardware.

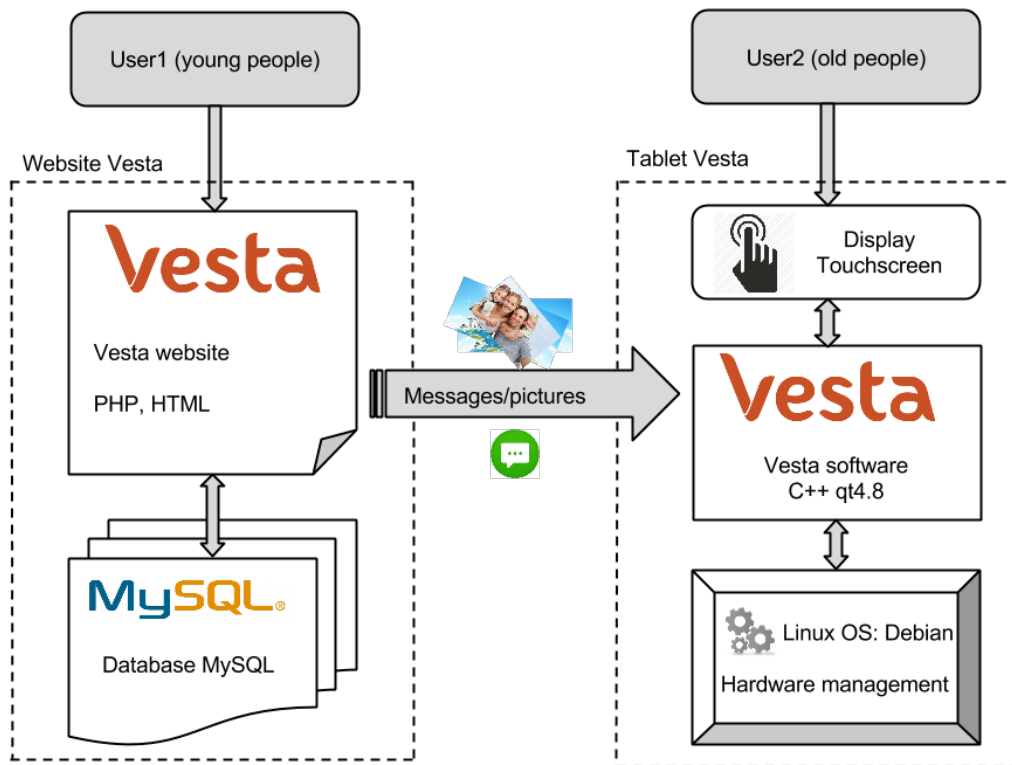


FIGURE 7.1 – Basic user flow.

7.1 Operating system

The OS used for this project is a debian. Debian is a linux distribution and was given by the conceptors of the beaglebone black. The OS manage the communications with the different hardware. The accelerometer is controled by I2C (to read datas and write configurations). The screen uses different interfaces, I2C for the touch panel and 24bit parallel for the display. The WIFI chip is connected with SDIO and it replace the emmc memory.

Every protocol and every pins input or output have to be declared in a file called device tree source. In the 3.14 kernel, this file is compiled and become a device tree blob. The compiled version of the file is executed at the OS startup. It initiates the load of the drivers and configures the pins as input, output, pwm or interrupt.

7.1.1 Drivers

A lot of work on this linux distribution was made to be fully compatible with the chosen hardware. The touch screen driver edt-ft5x06 had problems with the original 3.8 kernel of the distribution we used. The driver was not loading correctly from the device tree overlay. An upgrade to the 3.14 kernel resolved the problem. Then the scale of the touchscreen was not correct. When a touch event was done on the right-down corner, the mouse pointer moved to the center of the screen. Some configuration scripts had to be modified for the X11 graphical display server.

The edt-ft5x06 uses an interrupt line and I2C to get the touch events and the positions of the clicks.

Another driver is used for the WIFI connection with the wl1835mod. This driver uses the protocol SDIO.

7.1.2 Display

The touch screen works with a 24 bits parallel interface so the X11 configuration file had to be modified to work correctly. The LCD output was initially configured in 16 bits parallel interface. The hardware management in linux is called a device tree blob. It's a script that is compiled and is loaded at the OS startup. In this file, the driver for the touch panel was declared and the interrupt pins was defined. The resolution and frequency of the display is also configured in this script. The wifi chip also needs to load drivers at startup and tell the OS to connect to internet via this chip and with the SDIO protocol. The file is located in `/boot/dtbs/3.14xx/` and is called `vesta.dtb` (compiled) and the source is called `vesta.dts`. The file `uEnv.txt` located in `/boot/` also need to define which device tree blob(dtb) the OS has to load at startup.

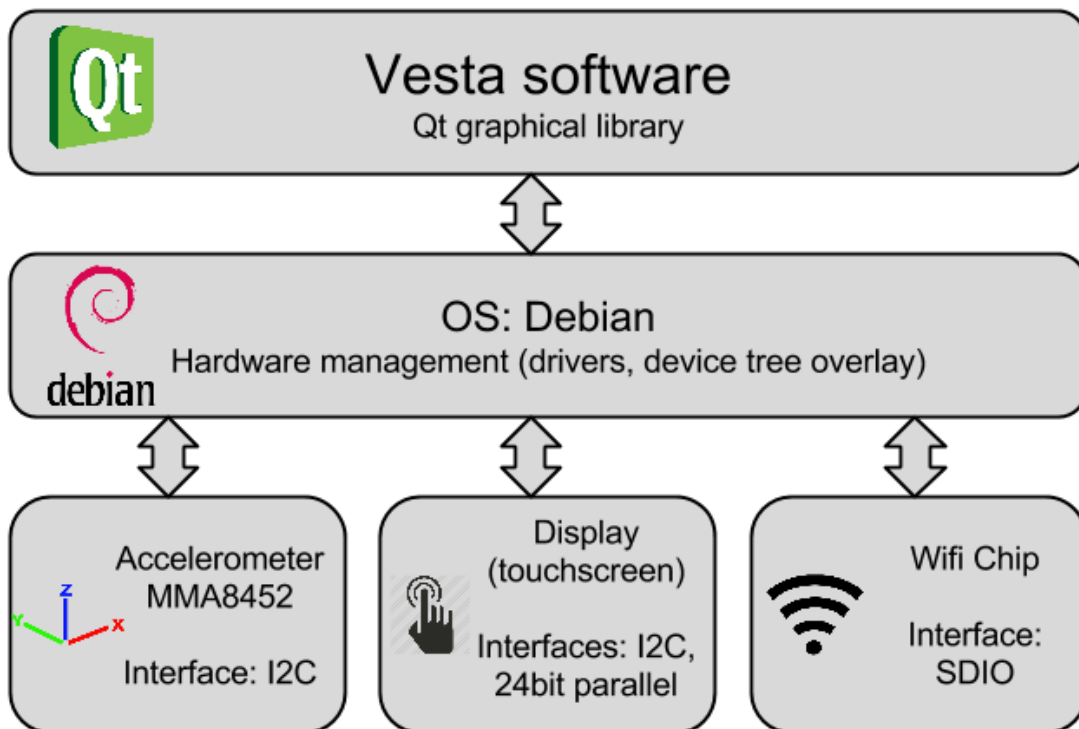


FIGURE 7.2 – Firmware dependencies.

7.2 Website

The website is used by the young users to send messages and pictures to the old user's tablet. The website contains a MySQL database, a php/html page that let the young user send a message and a php script used to parse the database to XML to be readable by the tablet.

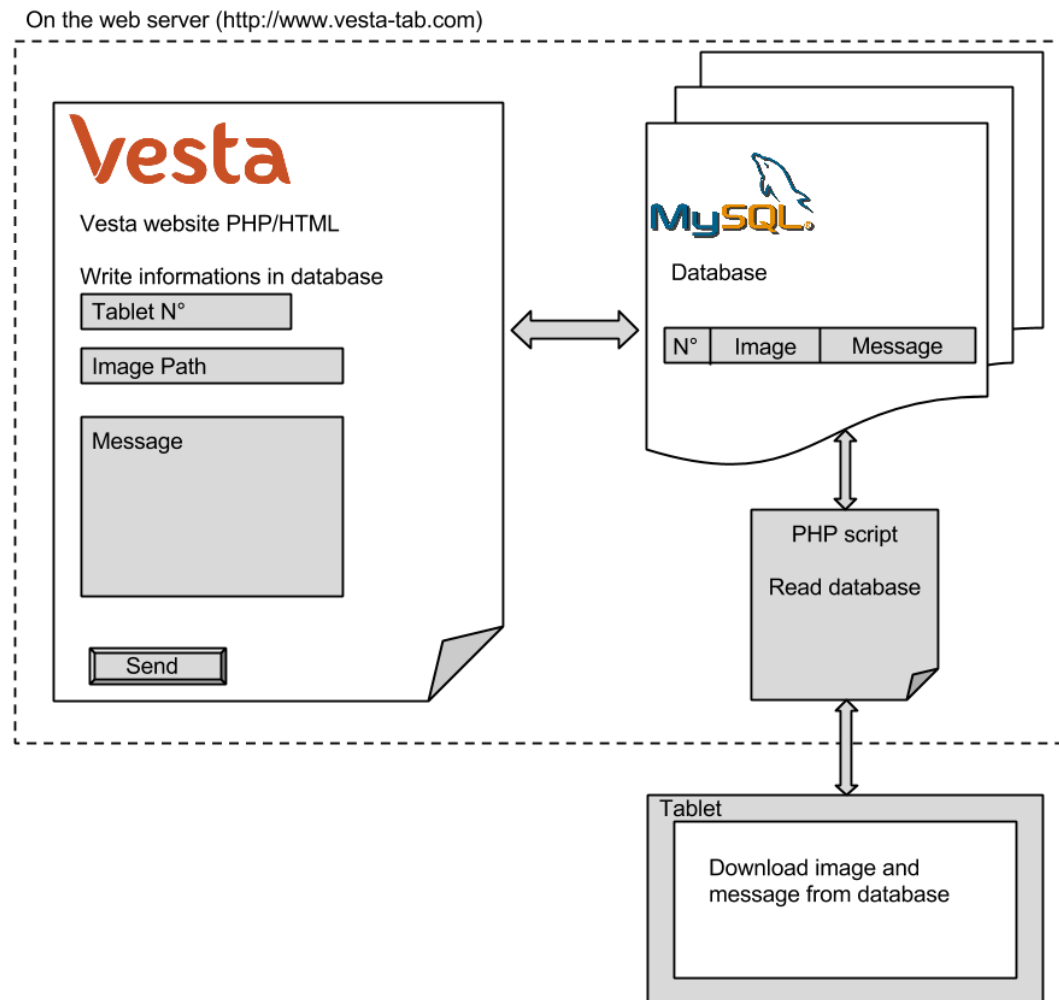


FIGURE 7.3 – Vesta website architecture.

7.2.1 Webpage

The webpage let the young user send a message to a wanted tablet. Every tablet has an id like a phone number known by the tablet owner. It is possible to select a picture on the user's computer and write a text message. When the "send" button is clicked, the picture and text message is saved in the MySQL database.

7.2.2 Database and XML parsing

The MySQL database is where all the messages and pictures are stored. The webpage connects and save the datas into the database when the user send a message.

An example of entries on the vesta table on the MySQL database are shown in the table2.

id	type	name	text	img	date
7	image/jpeg	family.jpg	Hello! A message for you	BLOB - 300KB	14.05.2015
8	image/jpeg	cat.jpg	Look at my cat :)	BLOB - 350KB	27.05.2015

TABLE 2 – Example of entries in the vesta table on the MySQL database

When the tablet update the datas, it connects to a script contained on the server. This script connects to the database and parse the informations needed by the tablet in XML.

XML is a markup language that facilitate the transfer of datas and the readability of them. It is mainly used in the RSS flux.

The XML code look like this :

```
<?xml version="1.0"?> <vesta> <item> <title>family.jpg</title> <image>http://www.vesta-tab.com/jo/getImage.php?id=7</image> <message>Hello! A message for you</message> </item>
<item> <title>cat.jpg</title> <image>http://www.vesta-tab.com/jo/getImage.php?id=8</image>
<message>Look at my cat</message> </item> </vesta>
```

7.3 Vesta software

The Vesta software is used by the old users to receive and display the messages and pictures sent by the young users. The software is made in C++ with Qt4.8/Qt quick 1.0. Qt is a free library used mainly to design softwares with graphical user interfaces (GUI). It is cross platform so with the same code it is possible to compile for linux, windows and mac. The library contains also a lot of utils to facilitate the development of emmbedded interfaces and manages the touchscreen events like the swipes, clicks and more. A lot of documentation is available and a lot of users develop with it.

7.3.1 Overall operations

At the startup, the vesta tab init check for the wifi connection and init all the hardware (accelerometer, touchscreen...). The touchscreen create an event when someone touch it and change the image displayed. It lets the user navigate between the different messages. Every minute the soft check if a new message is received.

The figure 7.4 shows how the software works.

7.3.2 Graphical interface

The graphical interface is composed of a listview and some buttons. The listview allows swipes event to navigate between the different pictures and messages. The buttons let the user configure the wifi or display the new messages.

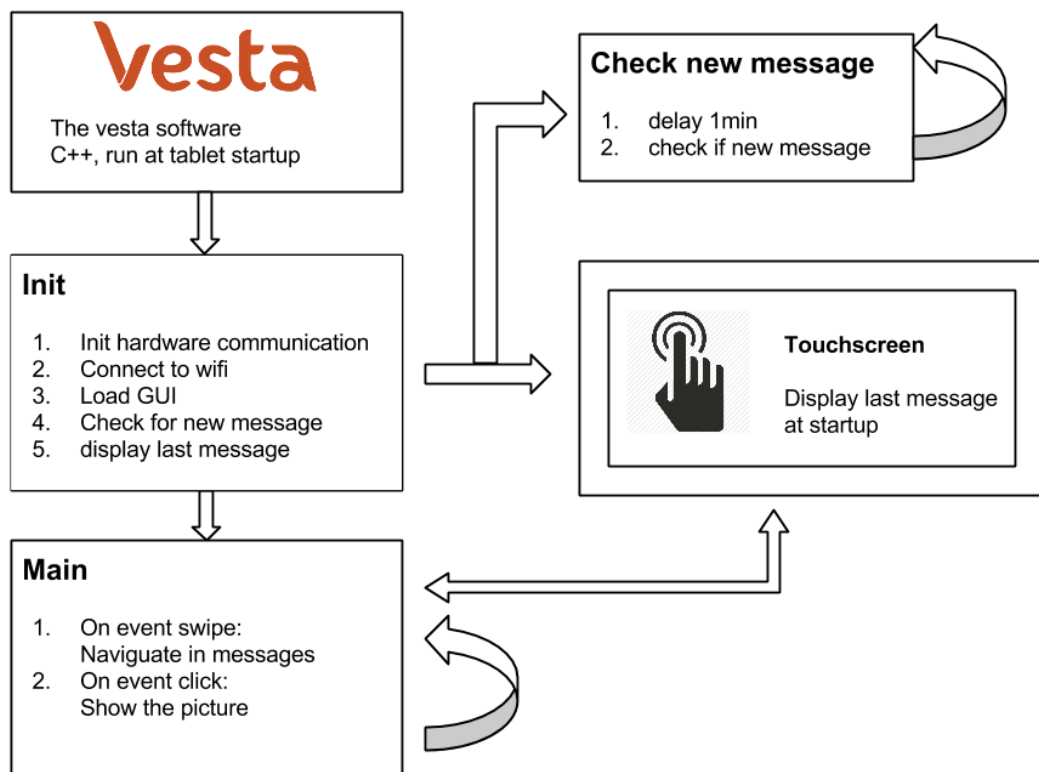


FIGURE 7.4 – Vesta software architecture.

8 Next steps

Activity monitoring

In the beginning of july, a first prototype will be made in Shenzen (China) with an industrial partner (Seedstudio). A final presentation of the project is going to take place in october with the prototype.

9 Conclusion

■■< Updated upstream

Here is the conclusion... ===== ■■> Stashed changes