
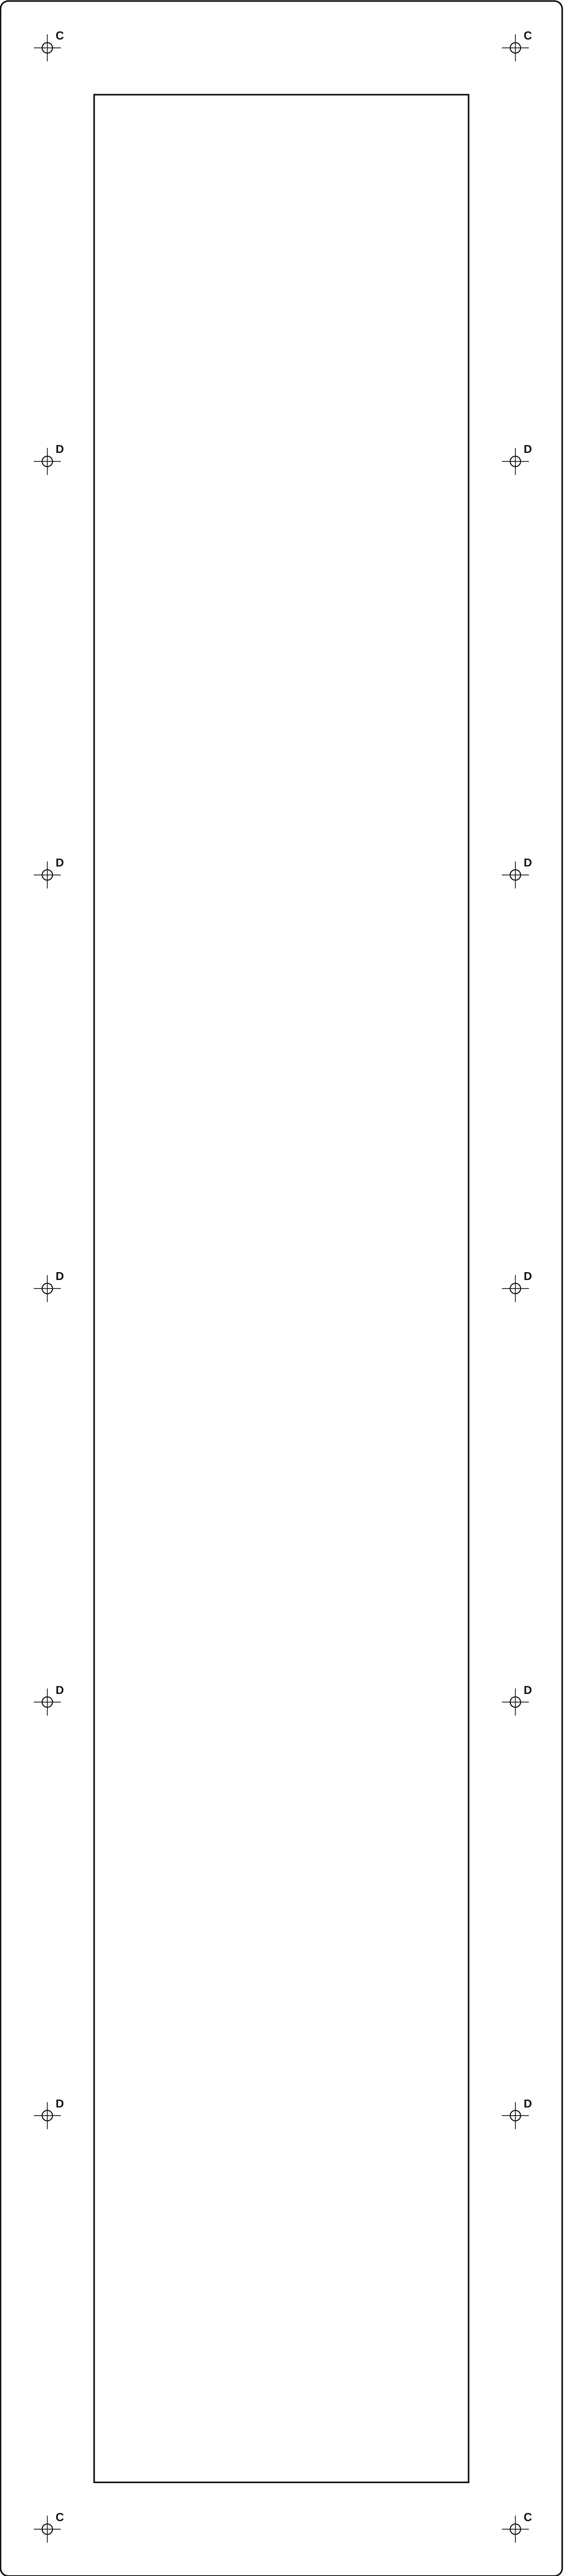





- Drill legend**
- A** drill 11/32" (0.344) — bolt clearance, face+middle (from 1/8" plasma pilot)
 - B** drill 13/64" (0.203) — solid rivet, face+middle (from 1/8" plasma pilot)
 - C** drill 17/64" (0.266) → tap 5/16-18 — frame corners [same bit as B]
 - D** drill 11/32" (0.344) — rivet shop-head relief, frame

Clamp face+middle and drill A/B pairs together. Frame brick-mount holes: drill + countersink on-site. Plasma pilots are 1/8 nominal.