1D, Cylindrical, Homogeneous Material Problem Description

PDE

$$\rho c_p \frac{\partial T}{\partial t} - \nabla k \nabla T = \rho c_p \frac{\partial T}{\partial t} - \frac{1}{r}\frac{\partial}{\partial r}\left(r \cdot k \frac{\partial T}{\partial r}\right) = q$$

Domain/Material Properties

$\Omega_r = [1, 2], \quad \rho c_p = 10, \; k = 1.5$

BCs

Left: **Neumann** – $\frac{\partial T}{\partial r}\Big|_{r=1} = k \cdot 200t$
Right: **Dirichlet** – $T(2, t) = 400$

ICs

Constant – $T(r, 0) = 400$

Method of Manufactured Solutions for 1D, RZ, Homogeneous Material Problem

Prescribed Solution

$$T(r,t) = (-200r + 400)t + 400$$

Derived Source

$$q = 200\,\rho c_p\,(-x + 2) + \frac{200kt}{r}$$

Interface Level Set Function

$$\phi(r,t) = 2 - (r - 0.04) - 0.2t = 2.04 - r - 0.2t$$

Numerical Parameters

```
[GlobalParams]
  order = FIRST
  family = LAGRANGE
[]

[Problem]
  coord_type = RZ
[]

[Mesh]
  type = GeneratedMesh
  dim = 2
  nx = 1
  ny = 1
  xmin = 1.0
  xmax = 2.0
  ymin = 0.0
  ymax = 0.5
  elem_type = QUAD4
[]
```

```
[Executioner]
  type = Transient
  solve_type = 'PJFNK'
  # petsc_options_iname = '-pc_type -pc_hypre_type'
  # petsc_options_value = 'hypre boomeramg'
  petsc_options_iname = '-pc_type'
  petsc_options_value = 'lu'
  line_search = 'none'

  l_tol = 1.0e-6
  nl_max_its = 15
  nl_rel_tol = 1.0e-10
  nl_abs_tol = 1.0e-9

  start_time = 0.0
  dt = 0.1
  end_time = 2.0
  max_xfem_update = 1
[]
```

```
[Constraints]
  [./xfem_constraint]
    type = XFEMSingleVariableConstraint
    variable = u
    jump = 0
    jump_flux = 0
    geometric_cut_userobject = 'level_set_cut_uo'
  [../]
[]
```

Results Comparison

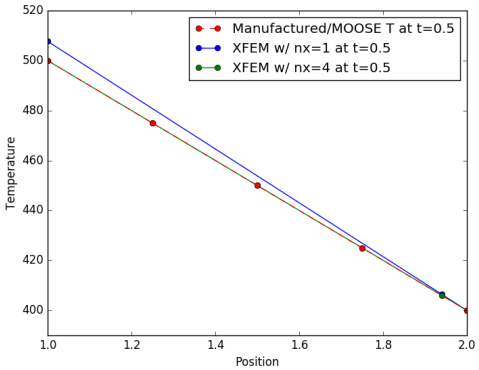

$t = 0.5$

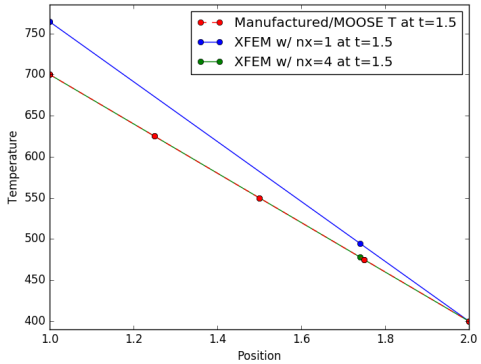

$t = 1.5$

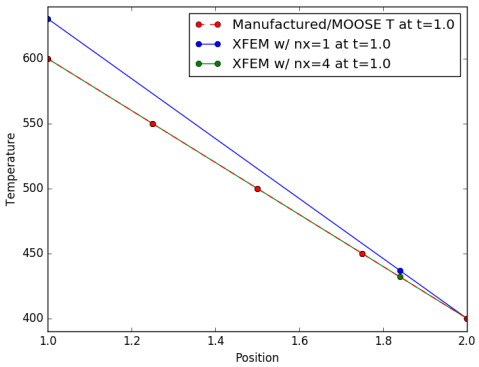

$t = 1.0$

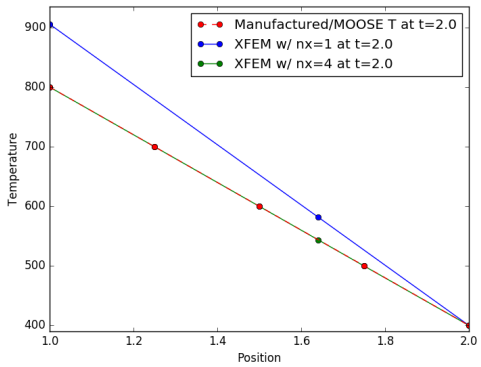

$t = 2.0$

L2 Error Norms at Each Timestep

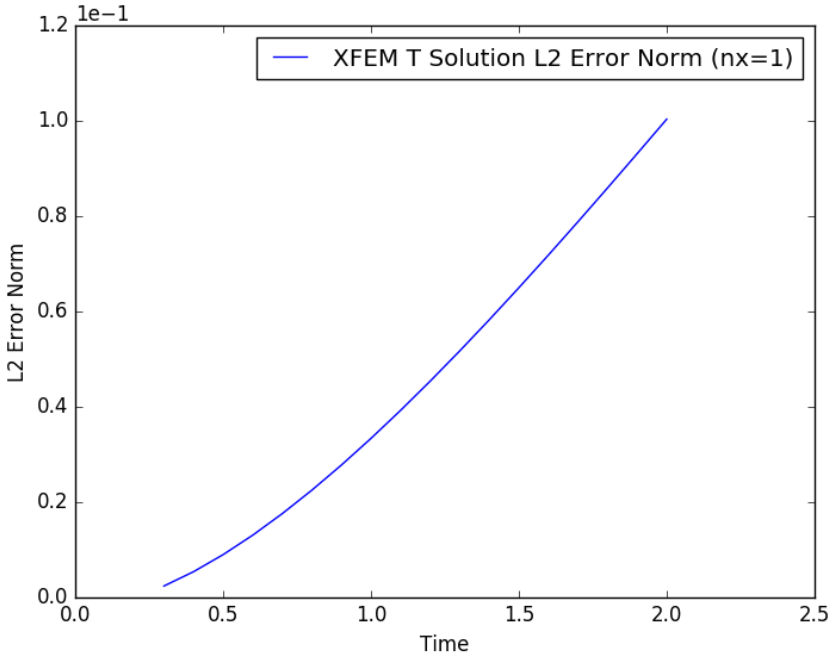

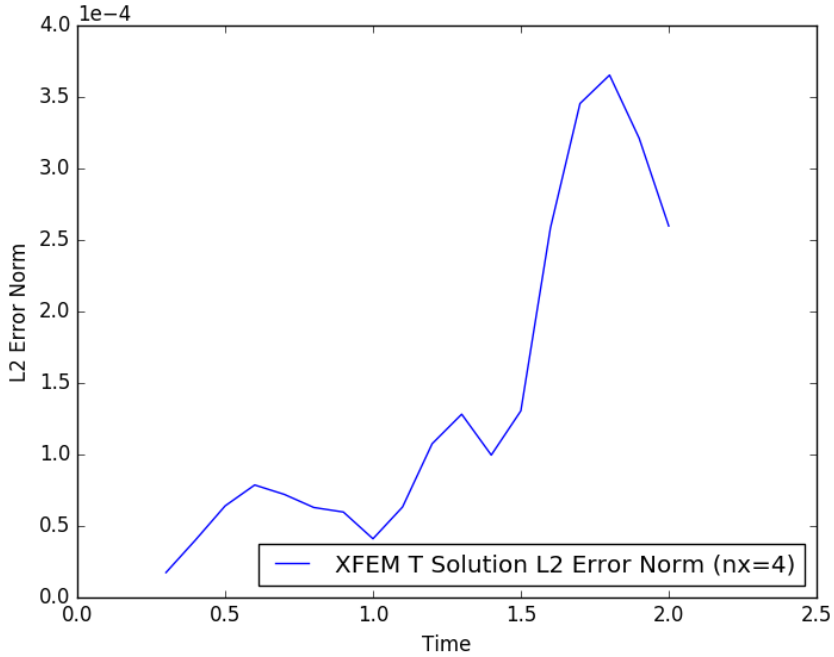

Mesh Refinement Effects on Error at x=0