

## Specifications 规格

#### Materials 材料

Plastic Housing 塑胶外壳: LCP, UL94V-0, Black Contact Terminal 接触端子: Copper Alloy Metallic Shell 金属外壳: Stainless Steel, SUS304, T= 0.25mm

#### Plating电镀

Underplating 底层电镀: 50µ" Nickel Contact Area 接触面积: 30µ" Gold Solder Tails 焊接末端: Gold Flash Metallic Shell 金属外壳: Matte Tin

### Electrical 电气规格

Voltage Rating电压额定值: 30 V AC

Current Rating电流额定值: Signal(Pins 2,3,4)信号:1.0 A.

Power (Pins1,5)电源:1.8A.

Operating Temperature 工作温度: -30°C to +85°C Contact Resistance接触电阻值: 30 mΩ max. Insulating Resistance绝缘电阻值: 1000 MΩ min. Dielectric Withstand Voltage耐电压: 500V AC/minute

Mechanical & Environmental 机械 & 环境

Mating Force插入力: 35N max.

Unmating Force拨出力: Initial 10N min.

Final 8N min after durability test.

Durability耐久性: 10,000 Cycles 次插拨

Part Number			Product Description			
USB3075			Micro USB Receptacle, Type B, SMT, Horizontal, Bottom Mount (Standard), without Peg, with Outer Shell Stakes			
Drawing Date						
4th February 2011						
By CC Tolerances (F		xcent as Noted)	Unite.		This drawing is confidential and	

Metric (mm) USB3075 D PCN X.X ± 0.2 X.XX ± 0.10 X.XXX ± 0.05 X.X° ± 2° X.XX° ± 1° X.XXX° ± 0.5°  $\oplus \Box$ D3 14/02/17








Not to Drawn By Scale

Sheet No.

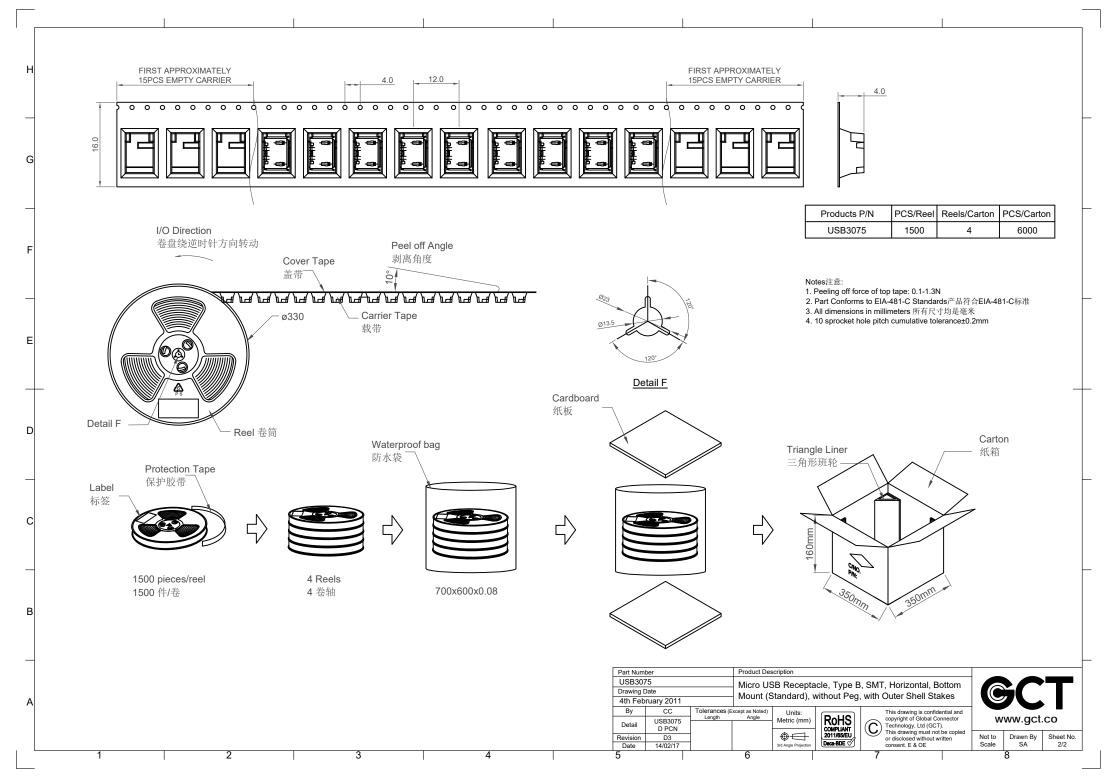

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Global Connector Technology (GCT): USB3075-30-A