

Deep Neural Network on the Versat Reconfigurable Processor

João Pedro Costa Luís Cardoso

Thesis to obtain the Master of Science Degree in
Electrical and Computer Engineering

Supervisor(s): Prof. José João Henriques Teixeira de Sousa

September 2022

Declaration

I declare that this document is an original work of my own authorship and that it fulfills all the requirements of the Code of Conduct and Good Practices of the Universidade de Lisboa.

Dedicated to my fiancée Matilde Moreira and soon to be born son, Francisco.

Acknowledgments

I want to thank my supervisor and Professor José Teixeira de Sousa for his eternal patience with me finishing this dissertation and the opportunity to work on the Versat CGRA. I would also like to acknowledge my friends and my parents who are always there for me and a special mention to my fiancée who has supported me all the way through my Bachelor and Masters and has pushed me to finally finish this document.

Resumo

Esta tese apresenta uma solução para simular o Deep Versat, uma CGRA que é acupulada de um processador RISC-V. Também é apresentada nesta tese ferramentas para o Deep Versat correr Redes Neurais Convolucionais. Estas cargas de trabalho são usadas em diversos algoritmos de Inteligência Artificial como a detecção de objetos em imagens. As vantagens da ferramenta são várias. Primeiro, a escrita das configurações do Versat é preciso conhecimento da arquitetura a nível detalhado e das suas APIs. Segundo, a escrita de algoritmos complexos para o Versat é preciso muitas horas de desenvolvimento e mais outras quantas para testar em hardware, ou seja o custo de usar o Versat baixa consideravelmente e a performance é otimizada á configuração do Versat escolhida podendo testar centenas de configurações de Hardware para otimizar a performance de uma rede em específico.

Palavras-chave: CGRA, Versat, Darknet, Redes Neurais

Abstract

This thesis presents a solution to simulate Deep Versat, a CGRA, which is coupled to a RISC-V CPU. It also presented in this thesis the tools for Deep Versat to run any Convolutional Neural Network with any configuration of datapaths. These workloads are used in Machine Learning algorithms with object detection in images. The tool has several advantages. Firstly, in the configuration writing to the Registers, there's a need for a high degree of knowledge of the architecture of the CGRA and its software APIs. Secondly, the writing of complex algorithms on this hardware needs long hours of debugging and development, meaning by the use of the tools presented in this thesis, the development time can be reduced and performance can be automatically optimized. Finally, the tools can be adapted to changes in the hardware by changing a few software functions at most.

Keywords: CGRA, Versat, Darknet, Convolutional Neural Networks, Deep Neural Networks

Contents

Acknowledgments	vii
Resumo	ix
Abstract	xi
List of Tables	xv
List of Figures	xvii
List of Acronyms	xix
Glossary	1
1 Introduction	1
1.1 Problem	1
1.2 Solution	2
1.3 Report Outline	2
2 Deep Neural Networks	3
2.1 Convolutional Neural Networks	4
2.1.1 Architecture Overview	4
2.2 Frameworks for Neural Networks	7
2.2.1 Darknet	7
2.2.2 Caffe	8
3 Deep Versat	11
3.1 Versat Architecture	11
3.1.1 Data Engine	11
3.1.2 Configuration Module	13
3.2 Deep Versat Architecture	15
3.2.1 Deep Versat System	16
4 CNN Compiling in FPGAs	17
4.1 Toolflows for Mapping CNNs in FPGAs	17
4.1.1 Supported Neural Network Models	18
4.1.2 Architecture & Portability	18

5	Darknet Lite	19
5.1	Porting Darknet to an embedded CPU	19
5.2	Conversion of Caffe to CFG	21
5.3	Parsing CFG Files into the program	21
6	Deep Versat Software Simulator	23
6.1	Architecture and Object Relation	23
6.2	Software API	25
6.3	Simulation	25
7	Improving the Versat API	27
7.1	Software Layers	27
7.2	Generic Convolution API	27
7.2.1	Hardware Configurations	27
7.2.2	Abstracting Versat Configuration	27
7.2.3	Convolution Scenarios	27
8	Conclusions	29
8.1	Achievements	29
8.2	Future Work	29
	Bibliography	31

List of Tables

2.1	Popular activation functions	7
3.1	Deep Versat Memory Map	16
4.1	CNN to FPGA Toolflows, adapted from [21]	17

List of Figures

2.1	Deep Neural Network Structure	3
2.2	CNN architecture example, taken from [8]	4
2.3	2D convolution with stride = 1 and without zero padding	5
2.4	Simple example of a maxpool layer, taken from [9]	6
2.5	Dropout if applied to all layers, adapted from [12]	6
3.1	Versat Topology, taken from [16]	12
3.2	Versat Data Engine Topology, taken from [17]	12
3.3	Versat Memory Unit with one AGU per port, taken from [19]	13
3.4	Configuration Module,taken from [16]	13
3.5	Deep Versat Architecture, taken from [1]	15
3.6	Deep Versat System using a RISC-V RV32IMC soft core, taken from [1]	16
4.1	fpgaConvNet Architecture. Taken from [22]	18
6.1	Class Structure for the Versat Simulator	24

List of Acronyms

AGU	Address Generation Unit
ALU	Arithmetic Logic Unit
API	Application Programming Interface
ASIC	Application-Specific Integrated Circuit
ASIP	Application Specific Instruction Set Processor
BRAM	Block Random Access Memory
CGRA	Coarse-Grain Reconfigurable Array
CM	Configuration Module
CNN	Convolutional Neural Network
CPI	Cycles Per Instruction
CPU	Central Processing Unit
DE	Data Engine
DMA	Direct Memory Access
DSP	Digital Signal Processor
FPGA	Field-Programmable Gate Array
FU	Functional Unit
HDL	Hardware Description Language
ISA	Instruction Set Architecture
LED	Light Emitting Diode
LUT	Lookup Table
RTL	Register-Transfer Level
UART	Universal Asynchronous Receiver-Transmitter
UUT	Unit Under Test
VCD	Value Change Dump
VPI	Verilog Procedural Interface

Chapter 1

Introduction

In this report, the problem of accelerating the execution of Deep Neural Networks (DNNs) using Coarse Grained Reconfigurable Arrays (CGRAs) is studied, with special emphasis on compiling a DNN description into code that runs on CPU/CGRA system. The Deep Versat Architecture [1] CGRA will be used as an implementation tool in this work.

1.1 Problem

Neural Networks have been an object of study since the 1940's, but until the beginning of this decade their applications were limited and did not play a major role in computer vision conferences. With its meteoric rise in research, several solutions to accelerate this algorithm have appeared, from Field Programmable Gate Arrays (FPGA) to Application Specific Integrated Circuits (ASIC) implementations.

Convolutional Neural Networks (CNNs) are a particular kind of DNN where the output values of the neurons in one layer are convolved with a kernel to produce the input values of the neurons of the next layer. This algorithm is compute bound, that is, its performance depends on how fast it can do certain calculations, and depend less on the memory access time. Namely the convolutional layers take approximately 90% of the computation time.

The acceleration of these workloads is a matter of importance for today's applications such as image processing for object recognition or simply to enhance certain images. Other uses like instant translation and virtual assistants are applications of neural networks and their acceleration is of vital importance to bring them into Internet of Things.

A suitable circuit to accelerate DNNs in hardware is the CGRA. A CGRA is a collection of Functional Units and memories with programmable interconnections in order to form computational datapaths. A CGRA can be implemented in both FPGAs and ASICs. CGRAs can be reconfigured much faster than FPGAs, as they have much less configuration bits. If reconfiguration is done at runtime, CGRAs add temporal scalability to the spacial scalability that characterize FPGAs. Moreover, partial reconfiguration is much easier to do in CGRAs compared to FPGAs which further speeds up reconfiguration time. Another advantage of CGRAs is the fact that they can be programmed entirely in software, contrasting with

the large development time of customized Intellectual Property (IP) blocks. The Coarse Grain Reconfigurable Arrays (CGRA) is a midway acceleration solution between FPGAs, which are flexible but large, power hungry and difficult to reprogram, and ASICs, which are fast but generally not programmable.

However, mapping a specific DNN to a CGRA requires knowledge of its architecture, latencies and register configurations, which may become a lengthy process, especially if the user wants to explore the design space for several DNN configurations. An automatic compiler that can map a standard DNN description into CPU/CGRA code would dramatically decrease time to market of its users. Currently there are equivalent tools for CPUs and GPUs and even for FPGAS.

1.2 Solution

The proposed solution is a compiler that takes a configuration file from a neural network framework like Caffe or Darknet. This new tool inputs the parameters of Deep Versat, such as the number of layers and functional units, and produces the C code needed for the Versat runs. This code is run on the RISC-V picorv32 [2] CPU controller that has Deep Versat as a peripheral.

1.3 Report Outline

This report is composed of 4 more chapters. In the second chapter, the state-of-the-art of neural networks and the difficulties accelerating them is described. In the third chapter, the Deep Versat architecture and how to program it is explained. In the fourth chapter, CNN compiler techniques are explored. Finally, the last chapter contains the proposed solution and the plan for its execution.

Chapter 2

Deep Neural Networks

A Neural Network (NN) is an interconnected group of nodes that follow a computational model that propagates data forward while processing. The earliest NNs were proposed by McCulloch and Pitts [3], in which a neuron has a linear part, based on aggregation of data and then a non-linear part called the activation function, which is applied to the aggregate sum. The issue with using only one neuron is that it is not able to be used in non-linear separable problems. By aggregating several neurons in layers and the input of each neuron as in figure 2.1 being based on the previous layers, that problem can be eliminated.

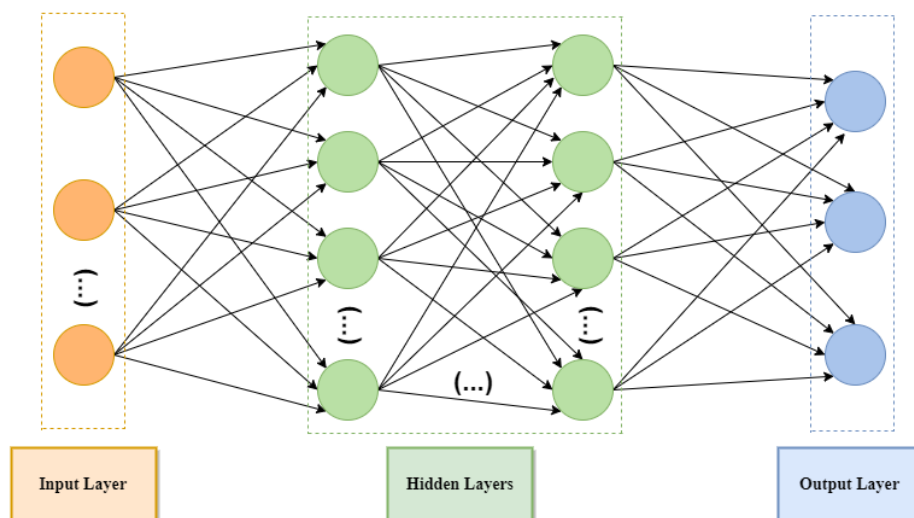


Figure 2.1: Deep Neural Network Structure

Each input to a neuron contributes differently to the output. The share is dependent on the weight value. These are obtained by training the network through various techniques, one of which is called Deep Supervised Learning [4]. For a certain input, there is an expected output and the real output of the NN. Then the loss function (the difference) is calculated and the weight values are iteratively modified for improving the outputs of the NN.

A Deep Neural Network (DNN) is a Neural Network that uses this approach for learning. It has multiple hidden layers and it can model complex non-linear relationships. If the activation function is non polynomial, it satisfies the Universal approximation problem [5].

One of the limitations of traditional NNs is the complexity of layer interconnections. Using as example the hand digit recognition problem and MNIST data set, composed of 28x28 grayscale images [6], in a traditional fully connected NN, a neuron from the second layer would have 28x28 weights. That is 3.136 kiloBytes per neuron of weight values while using 32-bit floating-point numbers (FP32). When building a more complex network for image recognition, the computationally complexity grows quadratically with the number of neurons per layer.

2.1 Convolutional Neural Networks

Convolutional Neural Networks (CNN) are a class of DNNs used in Image and Video recognition due to their shift invariance characteristic. They were first proposed in the 1980s but it was not until 2012 with AlexNet [7] that CNNs really took off. Fundamentally, CNNs are a regularized version of Multilayer Perceptrons (MLP). These networks fix the complexity issue discussed as each neuron is only connected to a few neurons of the previous layer.

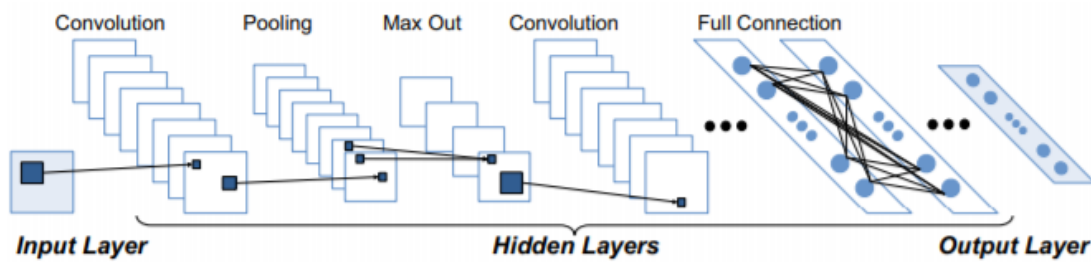


Figure 2.2: CNN architecture example, taken from [8]

2.1.1 Architecture Overview

Convolutional Layer

In a typical CNN not all layers are convolutional, but the convolutional layers are the most compute intensive ones. CNNs take input images with 3 dimensions (width, height and color space); for the following convolutional layers 3D arrays are used (width, height and number of channels). For the earlier example of the MNIST data set, the input would have dimensions 28x28x1 as it is a 2D image in grayscale.

To compute a neuron in the next layer we use the convolution equation 2.1 aided by Figure 2.3.

$$x_j^{l+1} = \delta \left(\sum_{i \in M_j} x_i^l * k_{ij}^{l+1} + b_j^{l+1} \right) \quad (2.1)$$

where x_j^{l+1} is the output, δ is the activation function, which depends on the architecture, x_i^l is the input of the convolution layer, k_{ij}^{l+1} is the kernel of said layer which is obtained by training the network, and b_j^{l+1} is the bias.

Thus an output neuron depends only on a small region of the input which is called the local receptive field.

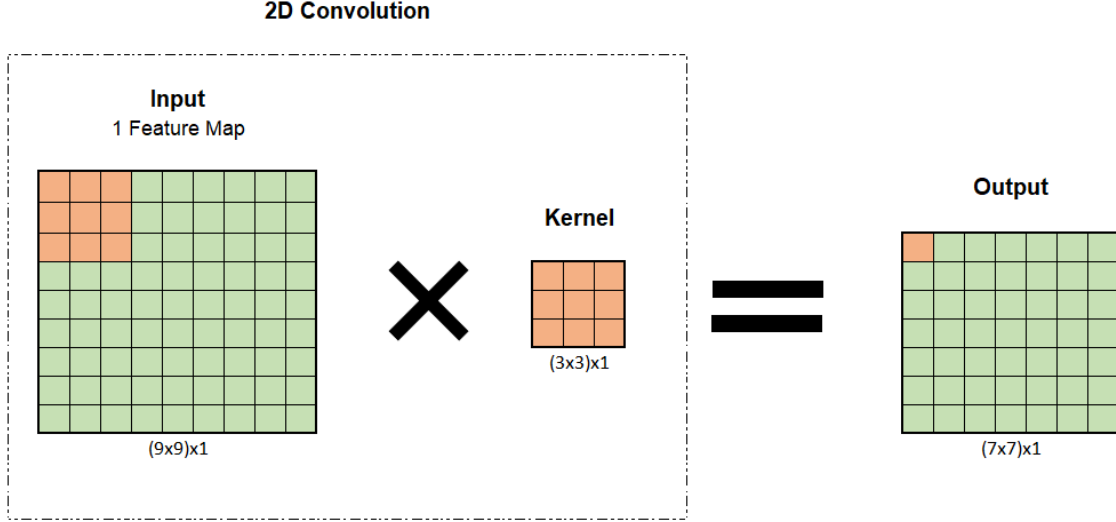


Figure 2.3: 2D convolution with stride = 1 and without zero padding

The output's dimensions depend on several parameters of the convolution such as zero-padding and stride. The former means to add zeros around the edges of the input matrix. The latter means the step used for the convolution, if the value is e.g 2, it will skip a pixel each iteration of the convolution. Equation 2.2 can be used to calculate the output size.

$$n^{l+1} = \frac{n^l - b^l + 2 \times p}{s} + 1 \quad (2.2)$$

where n is the width/height of the input of layer l , b is the width/height of the kernel, p is zero-padding while s is the stride.

The number of channels of the output is equal to the number of filters in the convolutional layer.

Pooling Layer

The MaxPool or AvgPool are layers used in Convolutional Neural Networks to downsampling the feature maps to make the output maps less sensitive to the location of the features.

Maximum Pooling or MaxPool, like it is suggested in its name groups $n \times n$ points and outputs the pixel with highest value. The output will have its size lowered by n times. The Average Pooling or AvgPool, instead takes all of the input points and calculates the average. Downsampling can also be achieved by using convolutions with stride 2 and padding equal to 1. Upsample layers can be also used that turn each pixel into n^2 , where n is the amount of times the output will be bigger than the input.

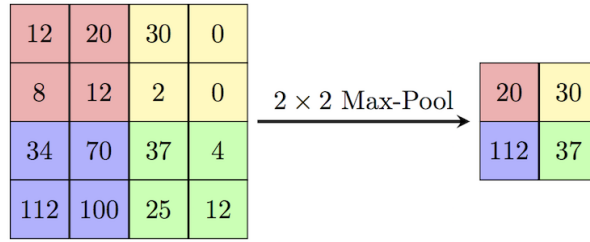


Figure 2.4: Simple example of a maxpool layer, taken from [9]

Fully Connected Layer

The fully connected layer is mostly used for classification in the final layers of the NN. It associates the feature map to the respective labels. It takes the 3D vector and outputs a single vector thus it is also known as flatten. Equation 2.3 describes the operation.

$$x_j^{l+1} = \delta\left(\sum_i (x_i^l \times w_{ji}^{l+1}) + b_j^{l+1}\right) \quad (2.3)$$

where w_{ji}^{l+1} are the weights associated with a specific input for each output.

Route & Shortcut Layer

The Shortcut layer or skip connection was first introduced in Resnet [10]. It allows to connect the previous layer to another to allow the flow of information across layers. The Route layer, used in Yolov3 [11], concatenates 2 layers in depth (channel) or skips the layer forward. This is used after the detection layer in Yolov3 to extract other features.

Dropout Layer

This type of layer was conceived to avoid overfitting [12] by dropping the neurons with probability below the threshold. In Figure 2.5, there is a graphical representation.

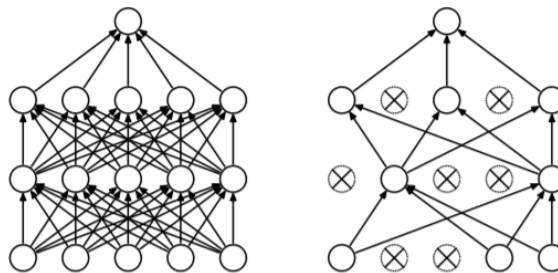


Figure 2.5: Dropout if applied to all layers, adapted from [12]

Activation Functions	Computation Equation
Sigmoid	$f(x) = \frac{1}{1 + e^{-x}}$
Tanh	$f(x) = \frac{e^x - e^{-x}}{e^x + e^{-x}}$
Softmax	$f(x_i) = \frac{e^{x_i}}{\sum_j e^{x_j}}$
ReLU	$f(x) = \begin{cases} x & \text{if } x \geq 0 \\ 0 & \text{if } x < 0 \end{cases}$
LReLU	$f(x) = \begin{cases} x & \text{if } x > 0 \\ \alpha x & \text{if } x \leq 0 \end{cases}$
ELU	$f(x) = \begin{cases} x & \text{if } x > 0 \\ \alpha e^x - 1 & \text{if } x \leq 0 \end{cases}$

Table 2.1: Popular activation functions

Activation Functions

Activation Functions (AF) are functions used in each layer of a NN to compute the weighted sum of input and biases, which is used to give a value to a neuron. Non-linear AFs are used to transform linear inputs to non-linear outputs. While training Deep Neural Networks, vanishing and exploding gradients are common issues, in other words, after successive multiplications of the loss gradient, the values tend to 0 or infinity and thus the gradient disappears. AFs help mitigate this issue by keeping the gradient within specific limits. The most popular activation functions can be found in table 2.1.

2.2 Frameworks for Neural Networks

To run a Neural Network model there are several popular frameworks like Tensorflow, PyTorch, Caffe and Darknet. Their purpose is to offer abstraction to software developers that want to run these networks. They also offer programming for different platforms like nVidia GPUs by using the CUDA API.

2.2.1 Darknet

Darknet [13] is an open source neural network framework written in C and CUDA. It is used as the backbone for Yolov3 [11] and supports several different network configurations such as AlexNet and Resnet. It utilizes a network configuration file (.cfg) and a weights file (.weights) as input for inference.

Listing 2.1: cfg code for a Convolutional Layer used in Yolov3 [11]

```
[convolutional]
batch_normalize=1
filters=32
size=3
stride=1
pad=1
```

```
activation=leaky
```

In Listing 2.1, there is a snippet of the file featuring a convolution layer with 32 kernels of size 3x3. It has stride 1 and zero padding of 1, meaning the output size equals the input size. The input size can be calculated by analyzing the previous layers and the network parameters. The network parameters in Listing 2.2 includes data to be used for training while only the first three parameters are needed for inference.

Listing 2.2: cfg code for the network parameters

```
[net]
width=608
height=608
channels=3

learning_rate=0.001
burn_in=1000
max_batches = 500200
policy=steps
steps=400000,450000
scales=.1,.1
```

2.2.2 Caffe

Convolutional Architecture for Fast Feature Embedding (Caffe) [14] is also an open source framework written in C++ with a Python interface. Caffe exports a neural network by serializing it using the Google Protocol Buffers (ProtoBuf) serialization library. Each network has 2 prototxt files:

- deploy.prototxt- File that describes the structure of the network that can be deployed for inference.
- train_val.prototxt- File that includes structure for training. it includes the extra layers used to aid the training and validation process.

The Python interface helps generate these files. For inference only the deploy file matters. In Listing 2.3, there is a snippet of a deploy file.

Listing 2.3: prototxt file for the input data and the first convolution layer of AlexNet [7]

```
name: "AlexNet"
layer {
  name: "data"
  type: "Input"
  top: "data"
```

```
    input_param { shape: { dim: 10 dim: 3 dim: 227 dim: 227 } }  
}  
layer {  
  name: "conv1"  
  type: "Convolution"  
  bottom: "data"  
  top: "conv1"  
  param {  
    lr_mult: 1  
    decay_mult: 1  
  }  
  param {  
    lr_mult: 2  
    decay_mult: 0  
  }  
  convolution_param {  
    num_output: 96  
    kernel_size: 11  
    stride: 4  
  }  
}
```


Chapter 3

Deep Versat

Versat is a Coarse Grained Reconfigurable Array (CGRA) Architecture. CGRAs are in-between Field Programmable Gate Arrays (FPGA) and general purpose processors (GPP). The former is fully reconfigurable and the highest performance for a workload can be achieved as the Architecture is tailored to the workload. GPPs on the other hand, are not reconfigurable and thus slower but are more generic and can process different workloads. While FPGAs have the granularity at the gate level, CGRAs have the granularity at the functional unit level. They are configurable at run-time and the datapath can be changed in-between runs.

In this chapter, the base Versat Architecture will be explained and then the Deep Versat Architecture and its improvements.

3.1 Versat Architecture

The Versat Architecture [15–18] is depicted in Figure 3.1. It is composed by the following modules: DMA, Controller, Program Memory, Control File Registry, Data-Engine and Configuration module. The Controller accesses the modules through the control bus. The code made in assembly or C is loaded into the program Memory (RAM) where the user can write to the configuration module for the Versat runs. Between runs of the Data Engine, the Controller can start doing the next run configuration and calculations.

3.1.1 Data Engine

The Data Engine which is represented in Figure 3.2 carries out the computation needed on the data arrays. It is a 32 bit Architecture with up to 11 Functional Units (FU): Arithmetic and Logic Unit (ALU), stripped down ALU (ALU-Lite), Multiplier and Accumulator (MAC) and Barrel Shifter. Depending on the project and calculations, a new type of FU or the existing ones can be altered to support the algorithm. The DE has a full mesh topology, that means that each FU can be the output to another, which leads to a decrease in operating frequency.

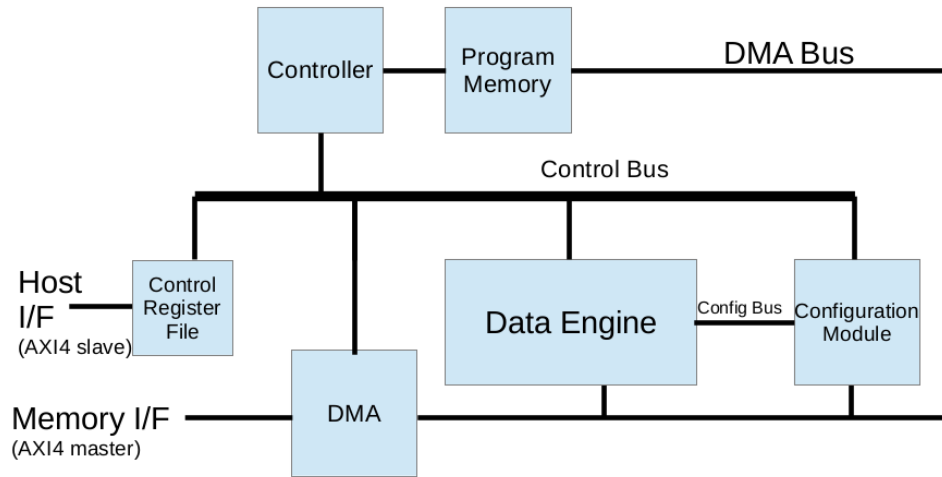


Figure 3.1: Versat Topology, taken from [16]

Each Input of a Functional Unit has a Mux with 19 entries, 8 of which are from the memories (2 from each Mem out of 4 total units) and the rest from the Functional Units (11).

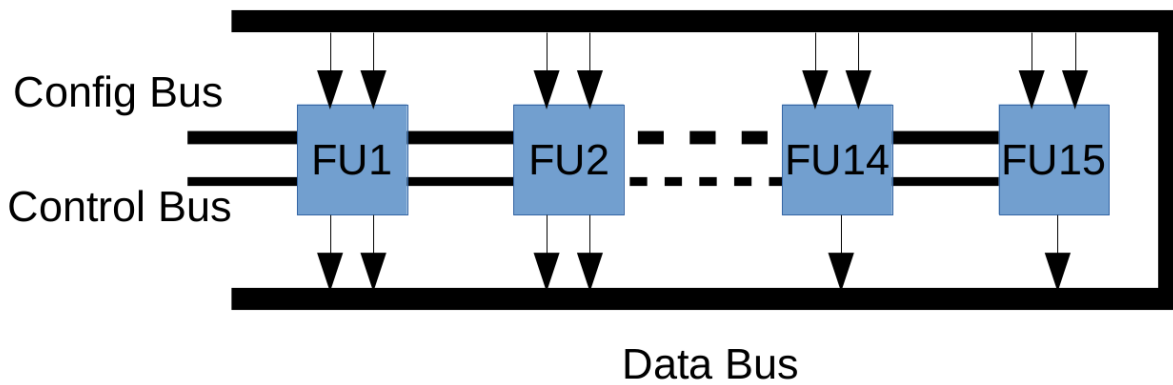


Figure 3.2: Versat Data Engine Topology, taken from [17]

The 4 Memories are dual port and for the input of both ports, there is an Address Generation Unit (AGU) that is able to reproduce two nested loops of memory indexes. The AGUs control which MEM data is the input of the FUs and where to store the results of the operation. Also, the AGUs support a delayed start to line up timings due to latencies. The memory module is represented in Fig 3.3.

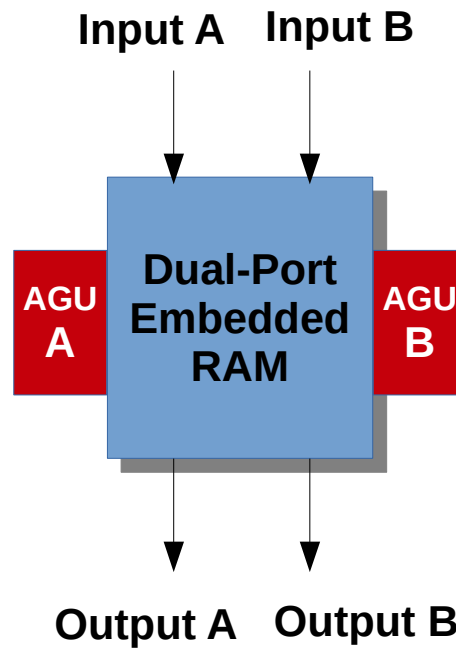


Figure 3.3: Versat Memory Unit with one AGU per port, taken from [19]

3.1.2 Configuration Module

Versat has several configuration spaces devised for each Functional Unit, with each space having multiple fields to define the operation of the Functional unit (e.g which op for the ALU). These are accessed before the run by the controller to define the datapath.

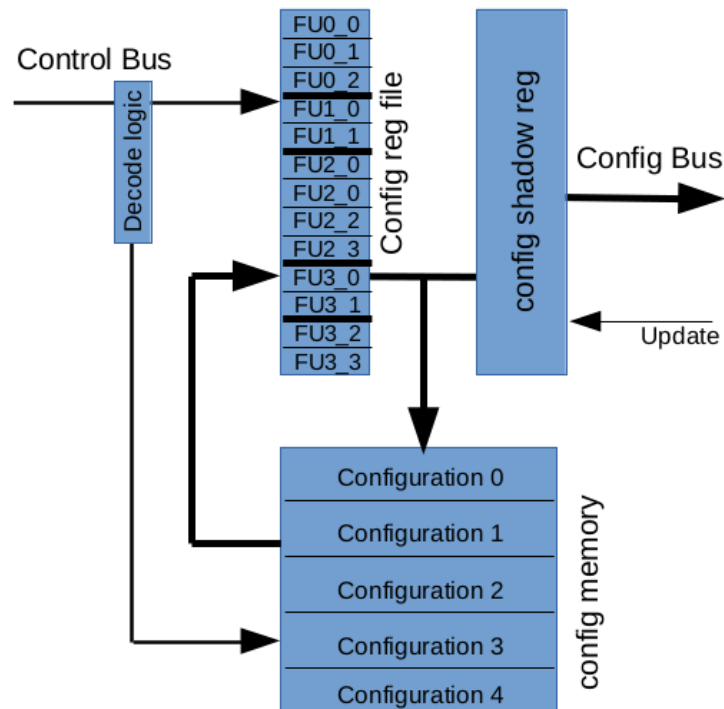


Figure 3.4: Configuration Module, taken from [16]

The Configuration Module (CM), depicted in figure 3.4, has three components: configuration memory, variable length configuration register file and configuration shadow register. The latter holds the current configuration so the controller can change the values of the configuration file in-between runs. The decode logic finds which component to write or read, if its the registers, it ignores read operations. Meanwhile, the configuration memory interprets both write and reads. When it receives a read, it writes into the register configuration data, when its a write, it stores the data instead.

3.2 Deep Versat Architecture

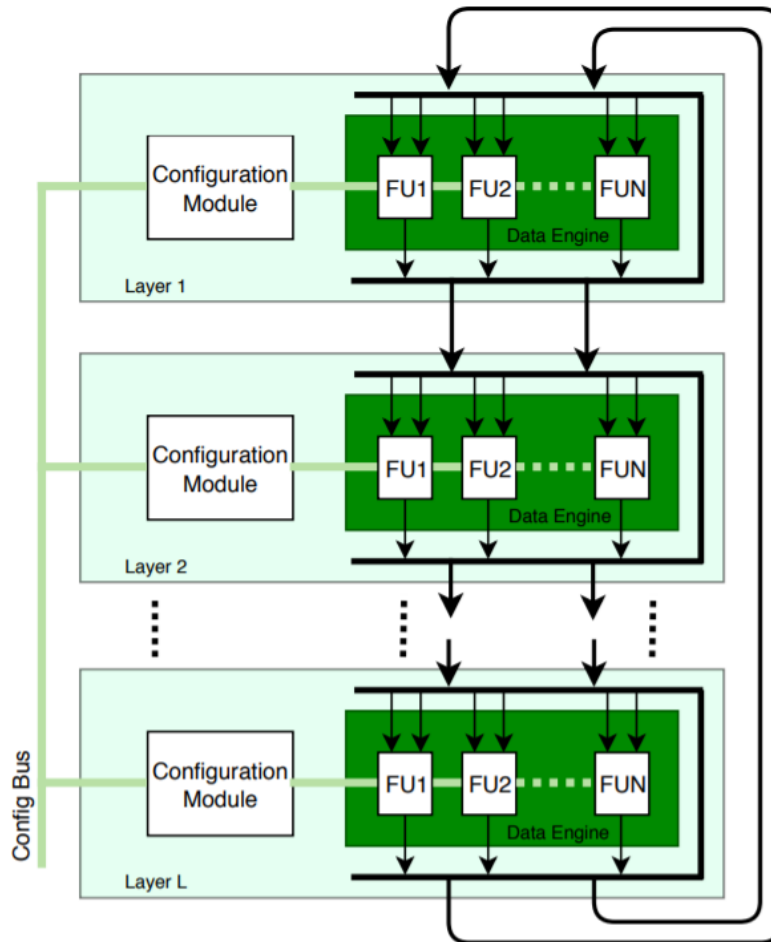


Figure 3.5: Deep Versat Architecture, taken from [1]

The Deep Versat Architecture [1], in figure 3.5, decouples the Data Engine (DE) from all control and as such, it can be used with any CPU. It can be paired with hard cores in FPGA boards like the ZYNQ board with its A9 ARM dual core CPUs or pair it with a soft core.

Its principle is to create the concept of a Versat Core: Configuration Module (CM) and its Functional Units (FU) connected with a control bus and a data bus. Instead of writing to a memory, there is the option to write for the next Versat Core to create more complex and more complete Datapaths, to avoid having to reconfigure the cores.

The number of Layers and FUs are reconfigurable pre-silicon with the only limitation that each layer is identical. To program Deep Versat, an API is generated from the Verilog .vh files.

3.2.1 Deep Versat System

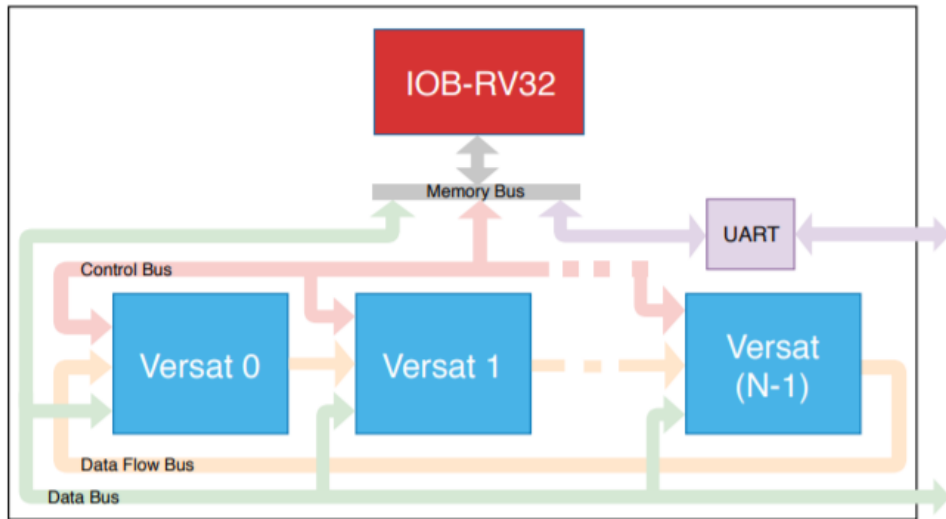


Figure 3.6: Deep Versat System using a RISC-V RV32IMC soft core, taken from [1]

To make a complete system, a new controller is needed with a more robust toolchain. In a recent dissertation [1], the IOB-RV32 processor was used which uses the RISC-V Instruction Set (ISA) with 32 bit Integer base alongside Multiplication and Division extension and Compact Instruction extension. The core is derived from the open source PicoRV32 CPU [2]. The IOB-RV32 uses its memory bus to access peripherals in which Deep Versat and the UART module are connected as such. The control bus is used to access the configuration modules of Deep Versat. The data bus is used to read and write large amount of data into Deep Versat. The data flow bus is reserved for inter Versat Core communication.

Peripheral	Memory address
UART module	12'h100xxxxx
Deep Versat control bus	8'h11xxxxxx
Deep Versat data bus	8'h12xxxxxx

Table 3.1: Deep Versat Memory Map

The memory map to address the peripherals, including deep versat, is in table 3.1. Each Versat has 15 bits of address while the CPU addresses the peripherals with 32 bits, with 8 of those occupied to chose the peripheral in question. That leaves 9 bits to address several Versat Cores which brings the theoretical maximum versat cores to 512. The IOB-RV32 is compatible with the GNU toolchain to offer better portability of code and alongside the C++ Versat API the difficulty to code for the System diminishes.

Chapter 4

CNN Compiling in FPGAs

This chapter presents an overview of toolflows that map convolutional neural networks into FPGA using the frameworks presented in Section 2.2. Next, the concepts for mapping CNNs into CGRAs are introduced.

4.1 Toolflows for Mapping CNNs in FPGAs

Several software frameworks have been developed to accelerate development and execution of CNNs. The neural networks frameworks discussed in section 2.2 provide high level APIs together with high performance execution on multi-core CPUs, GPUs, Digital Signal Processors (DSPs) and Neural Processing Units (NPU) [20]. FPGAs provide an alternative to these architectures as they provide high-performance while also being low-power. FPGAs can meet several requirements like throughput and latency in diversity of applications. Thus, several toolflows that map CNN descriptions into hardware in order to perform inference have been created. In table 4.1, a list of notable ones is presented.

Toolflow Name	Interface	Year
fpgaConvNet	Caffe & Torch	May 2016
DeepBurning	Caffe	June 2016
Angel-Eye	Caffe	July 2016
ALAMO	Caffe	August 2016
Haddoc2	Caffe	September 2016
DNNWeaver	Caffe	October 2016
Caffeine	Caffe	November 2016
AutoCodeGen	Proprietary Input Format	December 2016
Finn	Theano	February 2017
FP-DNN	Tensorflow	May 2017
Snowflake	Torch	May 2017
SysArrayAccel	C	June 2017
FFTCCodeGen	Proprietary Input Format	December 2017

Table 4.1: CNN to FPGA Toolflows, adapted from [21]

4.1.1 Supported Neural Network Models

These toolflows support the most common layers in CNNs, which are discussed in chapter 2. The acceleration target changes depending on the toolflow. For example, the fpgaConvNet [22] toolflow focuses more on feature extraction while offering non accelerated support for fully connected layers.

4.1.2 Architecture & Portability

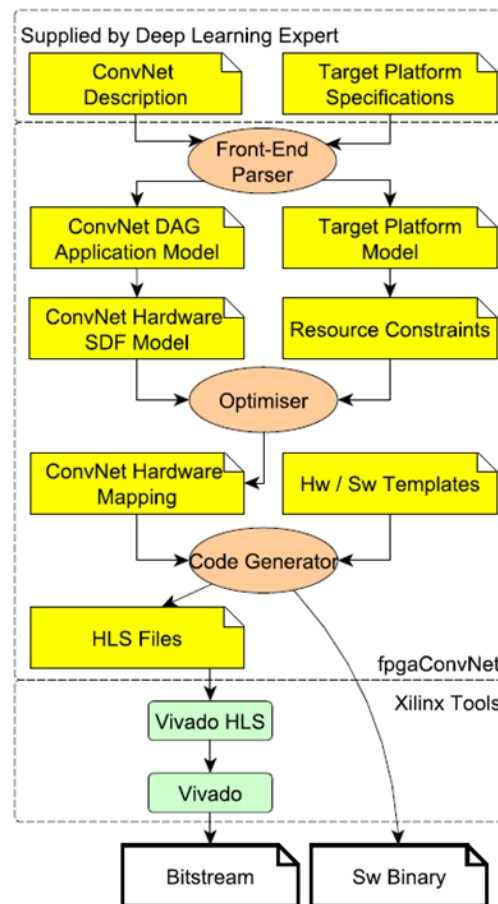


Figure 4.1: fpgaConvNet Architecture. Taken from [22]

As shown in figure 4.1, the fpgaConvNet architecture consists of a Front-End Parser that reads a (ConvNet) description of the network and a description of the target platform and produces, on the one hand a Directed Acyclic Graph (DAG), which is then converted to a Synchronous Data Flow (SDF) hardware model, and on the other hand, a model of the target platform from which resource constraints are derived. The hardware model thus obtained goes into an Optimiser procedure, which produces a hardware mapping. Using hardware and software templates, a Code Generator procedure, generates both the High Level Synthesis (HLS) input files and the software binaries that will run on the control CPU embedded in the FPGA. The HLS files go into the Xilinx (FPGA manufacturer) tools so that the configuration bitstream of the FPGA is produced.

Chapter 5

Darknet Lite

As mentioned in Section 3, the Deep Versat system includes a RISC-V CPU to take out generic code and to write the configuration runs into Versat's memories. This means the first step into implementing software that can run any convolutional neural network on this system, it must first run on the CPU then we off load Fixed Functions to Versat such as the convolutional layers, maxpool etc.

5.1 Porting Darknet to an embedded CPU

As mentioned in Section 2.2 is a framework for Neural Networks on C++ that uses dynamic memory and GPU acceleration option to get faster outputs. Also the use of floats is also prohibited in the embedded code as the RISC-V CPU only supports the extensions IM. I for Integer and M for multiplication. It also has a lot of features that are not needed in this work, such as training the CNN. By stripping the features of darknet we get a much simpler code framework appropriately named darknet lite.

In the following figure, the data structure for a layer is showed. A CNN on darknet lite is just an array of layers in which each has an input, output and layer parameters. Usually the input is a past layer output or the image input.

Listing 5.1: Layer Struct Yolov3 [11]

```
struct layer{
    //Generic
    LAYER_TYPE type; //identifies layer's type
    ACTIVATION activation; //identifies layer's activation function
    void (*forward) (struct layer, struct network); //associated with forward
        method of each type of layer
    int groups;
    // Convolutional
    int batch_normalize; //indicates layer output must be normalized before
        applying activation function
    int batch; //always 1
```

```

int inputs; //size of layer input
int outputs; //size of layer output
int h,w,c; //input dimensions
int out_h, out_w, out_c; //output dimensions
int n; //number of filters
int size; //size of filter
int stride; //indicates how many positions kernel moves
int pad; //indicates size of padding sorrounding image

//Shortcut
int index; //used in shortcut layer

int classes; //used in yolo layer
int *mask; //used in yolo layer
int total; //used in yolo layer
int * input_layers; //used in route layer
int * input_sizes; //used in route layer
fixed_t * biases; //used for convolutional and yolo layers
fixed_t * scales; //used for convolutional layers with batch_normalize
fixed_t * weights; //convolutional layer weights
fixed_t * output; //layer output /result
fixed_t * rolling_mean; //used for normalize_cpu
fixed_t * rolling_variance; //used for normalize_cpu
size_t workspace_size; //indicates max output size among all layers

//Generic Var
fixed_t f1; // float->fixed 32 bit
};

```

By Parsing the .cfg file, a configuration file is written in C with the layer array and static position of the data for each layer. Each Layer has it's definition in C to be ran by the embedded CPU but for the sake of this project, several layers can be replaced by Functions that utilize Versat, the same way that the original Darknet framework had it's functions written for CPU or GPU usage.

In the following figure is an example of a CPU layer that computes the convolutional layer while using Fixed Point Logic.

Listing 5.2: Convolutional Layer using only CPU and fixed memory

```

void forward_convolutional_layer(layer l, network net) {

    int m = l.n; //number of filters
    int k = l.size*l.size*l.c; //filter dimensions * number of colours

```



```

    int n = l.out_w*l.out_h; //output dimension

    fixed_t *a = l.weights; //weight base address
    fixed_t *b = net.workspace; //max network's layer size
    fixed_t *c = l.output; //layer output
    fixed_t *im = net.input; //layer input


    //Unroll image
    if (l.size == 1) b = im;
    else im2col_cpu(im, l.c, l.h, l.w, l.size, l.stride, l.pad, b);
    //Perform convolution
    gemm(0, 0, m, n, k, POINT, a, k, b, n, POINT, c, n);


    //Normalize, scale and add bias
    if(l.batch_normalize) forward_batchnorm_layer(l, net);
    else add_bias(l.output, l.biases, l.batch, l.n, l.out_h*l.out_w);


    //Apply activation method
    activate_array(l.output, l.outputs*l.batch, l.activation);
    //printf("max=%f,min=%f\n",fixed_to_float(max),fixed_to_float(min));

}

```

5.2 Conversion of Caffe to CFG

5.3 Parsing CFG Files into the program

Chapter 6

Deep Versat Software Simulator

The need for a software simulator comes from the complexity of the configurations being written into Versat and the hardware simulation faults of being slow.

The goal is to emulate what the hardware is doing much more efficiently than a simple Hardware simulation as the time of development for hardware is much higher than simple software. The Simulator executes clock iteration per iteration getting the same results in each clock as the hardware. As Versat is a CGRA, different functional unit configurations are easy to accomplish in the simulator and the time to get results on performance for a specific program is a lot quicker. The only thing the Simulator can't do is predict if the hardware configurations fits the FPGA that is going to be used and the clocks that the hardware can run. But, the propagation time is predictable depending on the number of functional units as the difference between times in different setups is due to the multiplexers on the inputs of the FUs.

6.1 Architecture and Object Relation

The Simulator is made up by the Parent Class called Versat, in which will be simulated itself, as each Versat instance is independent from each other, the simulations are also independent. The Versat is made up of 2 CStage Arrays, one is the "live" while the other is the shadow registers, where the configurations are held before the simulator is ran. Each Stage is made up of its Functional Units, in which each one is connected to the Databus. As it happens in the hardware, functional units can access the databus which has the output of the current stage and previous one.

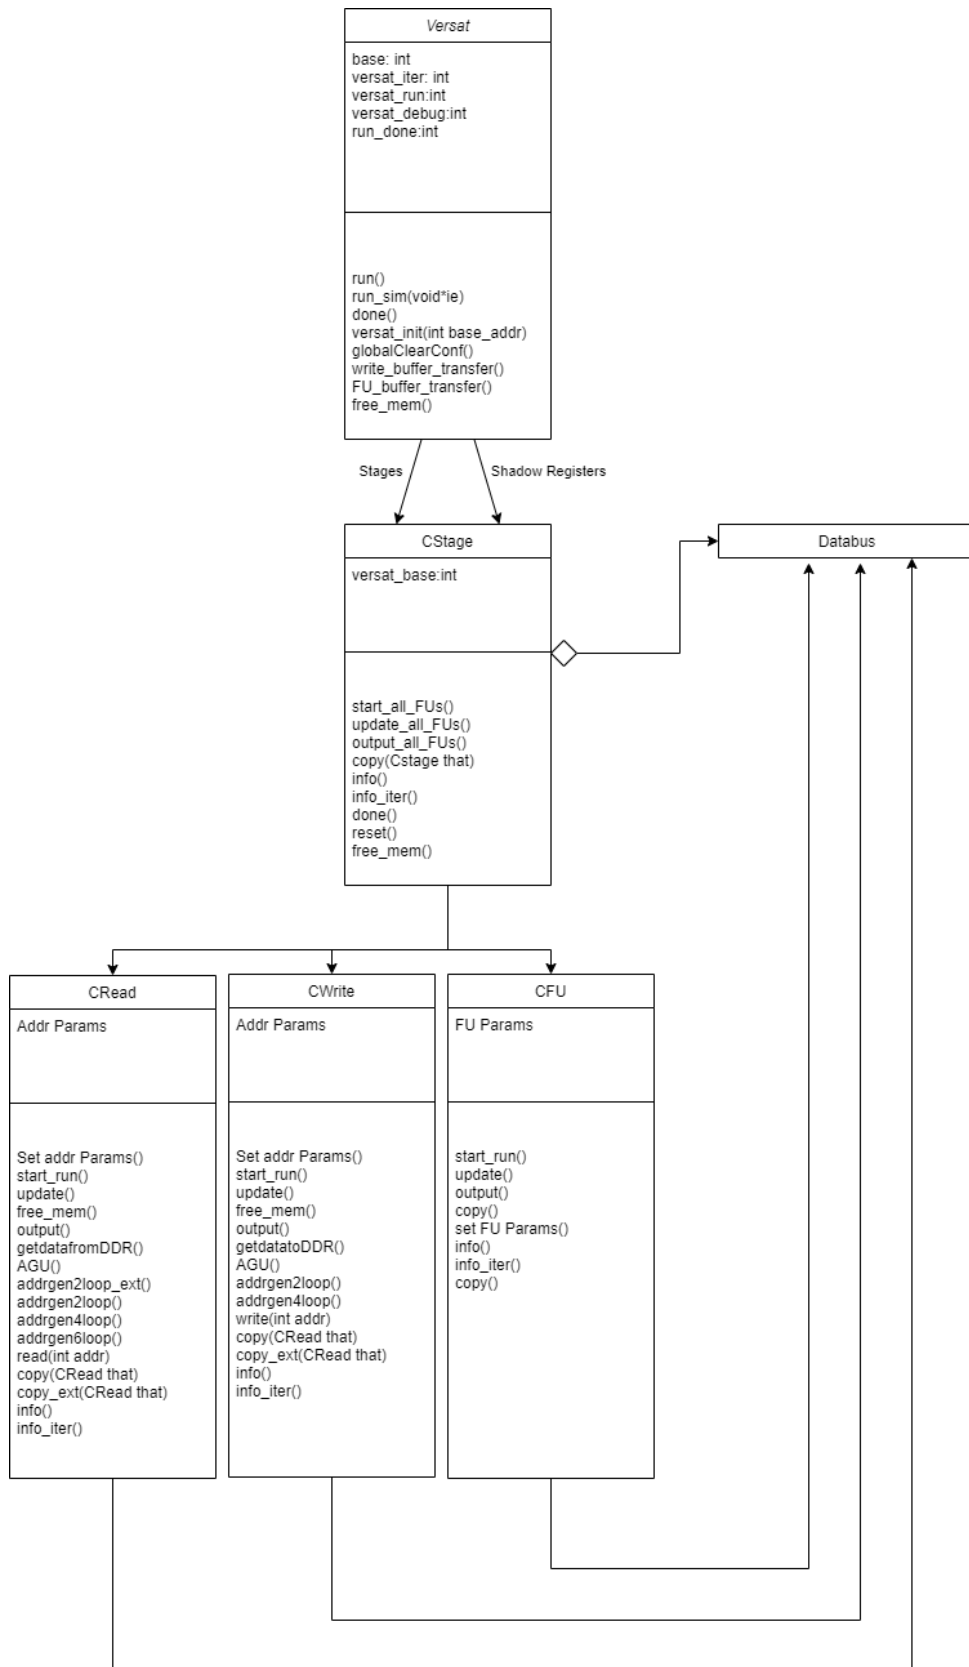


Figure 6.1: Class Structure for the Versat Simulator

6.2 Software API

6.3 Simulation

Chapter 7

Improving the Versat API

7.1 Software Layers

7.2 Generic Convolution API

7.2.1 Hardware Configurations

7.2.2 Abstracting Versat Configuration

7.2.3 Convolution Scenarios

Chapter 8

Conclusions

Insert your chapter material here...

8.1 Achievements

The major achievements of the present work...

8.2 Future Work

A few ideas for future work...

Bibliography

- [1] V. J. B. Mário. Deep versat: A deep coarse grain reconfigurable array. Master's thesis, Instituto Superior Técnico, November 2019.
- [2] Picorv32- a size-optimized risc-v cpu. URL <https://github.com/cliffordwolf/picorv32>.
- [3] G. Piccinini. The first computational theory of mind and brain: A close look at mcculloch and pitts's "logical calculus of ideas immanent in nervous activity". *Synthese*, 141, 08 2004. doi: 10.1023/B:SYNT.0000043018.52445.3e.
- [4] Y. LeCun, Y. Bengio, and G. Hinton. Deep learning. *Nature*, 521:436–44, 05 2015. doi: 10.1038/nature14539.
- [5] M. Leshno, V. Y. Lin, A. Pinkus, and S. Schocken. Multilayer feedforward networks with a nonpolynomial activation function can approximate any function. *Neural Networks*, 6(6):861 – 867, 1993. ISSN 0893-6080. doi: [https://doi.org/10.1016/S0893-6080\(05\)80131-5](https://doi.org/10.1016/S0893-6080(05)80131-5). URL <http://www.sciencedirect.com/science/article/pii/S0893608005801315>.
- [6] mnist database of hand-written digits. URL <http://yann.lecun.com/exdb/mnist/>.
- [7] A. Krizhevsky, I. Sutskever, and G. E. Hinton. Imagenet classification with deep convolutional neural networks. In *Advances in Neural Information Processing Systems 25*, pages 1097–1105. 2012.
- [8] M. Tanomoto, S. Takamaeda-Yamazaki, J. Yao, and Y. Nakashima. A cgra-based approach for accelerating convolutional neural networks. pages 73–80, 09 2015. doi: 10.1109/MCSoc.2015.41.
- [9] Max-pooling / pooling. URL https://computersciencewiki.org/index.php/Max-pooling/_/_Pooling.
- [10] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition, 2015.
- [11] J. Redmon and A. Farhadi. Yolov3: An incremental improvement, 2018.
- [12] N. Srivastava, G. Hinton, A. Krizhevsky, I. Sutskever, and R. Salakhutdinov. Dropout: A simple way to prevent neural networks from overfitting. *Journal of Machine Learning Research*, 15:1929–1958, 2014.
- [13] J. Redmon. Darknet: Open source neural networks in c. <http://pjreddie.com/darknet/>, 2013–2016.

- [14] Y. Jia, E. Shelhamer, J. Donahue, S. Karayev, J. Long, R. B. Girshick, S. Guadarrama, and T. Darrell. Caffe: Convolutional architecture for fast feature embedding. *CoRR*, abs/1408.5093, 2014. URL <http://arxiv.org/abs/1408.5093>.
- [15] R. Santiago, J. D. Lopes, and J. T. de Sousa. Compiler for the versat reconfigurable architecture. REC 2017, 2017.
- [16] J. D. Lopes, R. Santiago, and J. T. de Sousa. Versat, a runtime partially reconfigurable coarse-grain reconfigurable array using a programmable controller. Jornadas Sarteco, 2016.
- [17] J. D. Lopes and J. T. de Sousa. Fast fourier transform on the versat cgra. Jornadas Sarteco, 09 2017.
- [18] J. D. Lopes and J. T. de Sousa. Versat, a minimal coarse-grain reconfigurable array. In D. I., C. R., B. J., and M. O., editors, *High Performance Computing for Computational Science – VECPAR 2016*, pages 174–187. Springer, 2016. doi:10.1007/978-3-319-61982-8_17.
- [19] J. D. Lopes. Versat, a compile-friendly reconfigurable processor – architecture. Master’s thesis, Instituto Superior Técnico, November 2017.
- [20] A. Ignatov, R. Timofte, P. Szczepaniak, W. Chou, K. Wang, M. Wu, T. Hartley, and L. Van Gool. Ai benchmark: Running deep neural networks on android smartphones, 10 2018.
- [21] S. I. Venieris, A. Kouris, and C.-S. Bouganis. Toolflows for mapping convolutional neural networks on fpgas: A survey and future directions, 2018.
- [22] S. I. Venieris and C.-S. Bouganis. fpgaConvNet: A Framework for Mapping Convolutional Neural Networks on FPGAs. In *2016 IEEE 24th Annual International Symposium on Field-Programmable Custom Computing Machines (FCCM)*, pages 40–47. Institute of Electrical and Electronics Engineers (IEEE), May 2016. doi: 10.1109/FCCM.2016.22. URL <http://dx.doi.org/10.1109/FCCM.2016.22>.