



BELLOW'S DIMENSION

Maximum extension

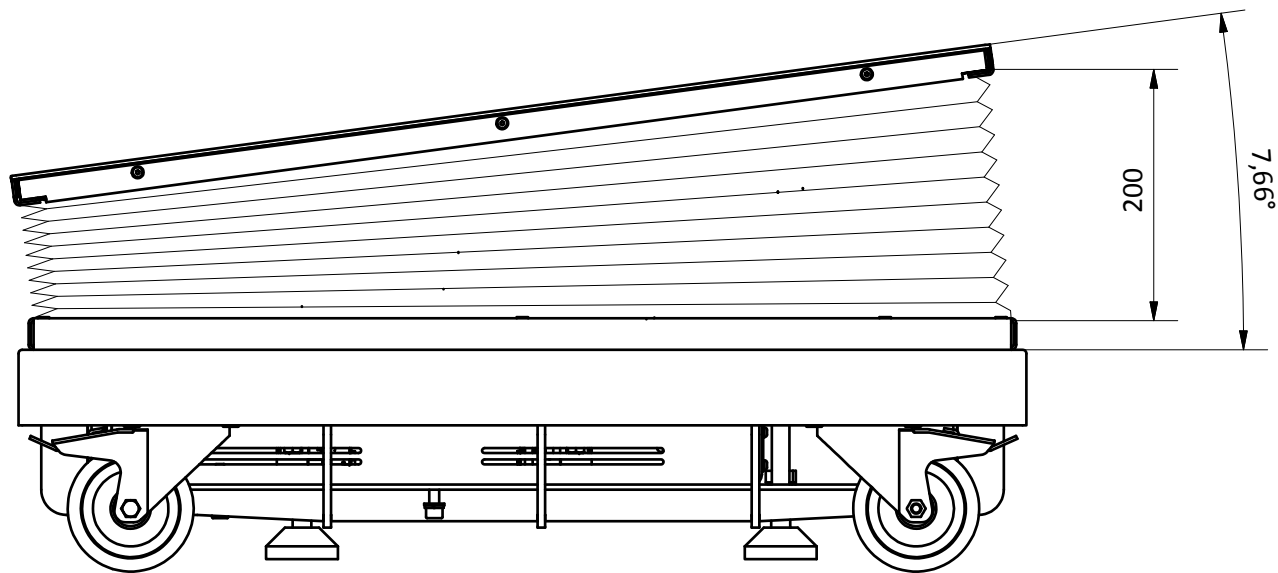

Rear view (1:6)


Maximum compression

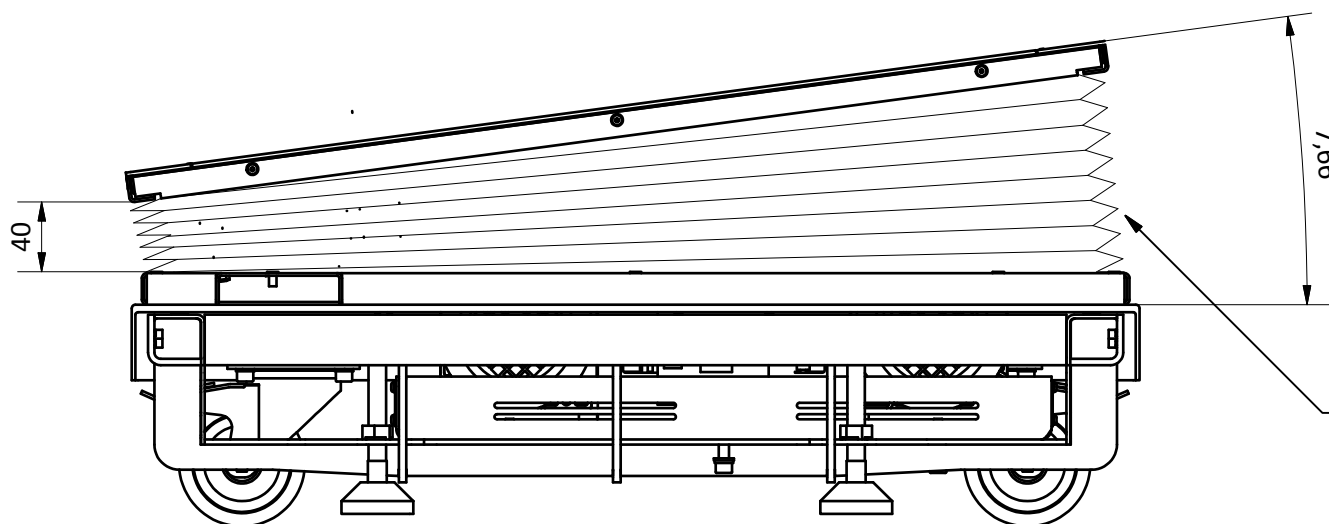

Front view (1:6)

In the uppest position the bellow can't be fully stretched

Section detail




TECHNICAL DETAILS

Folding thickness: 20 mm  
Stretched length: 230mm

Max. compression: 40 mm  
Max. extension: 200 mm  
Rest position: 125 mm



Bellow Up and Down Plastic Flanges Dimensions

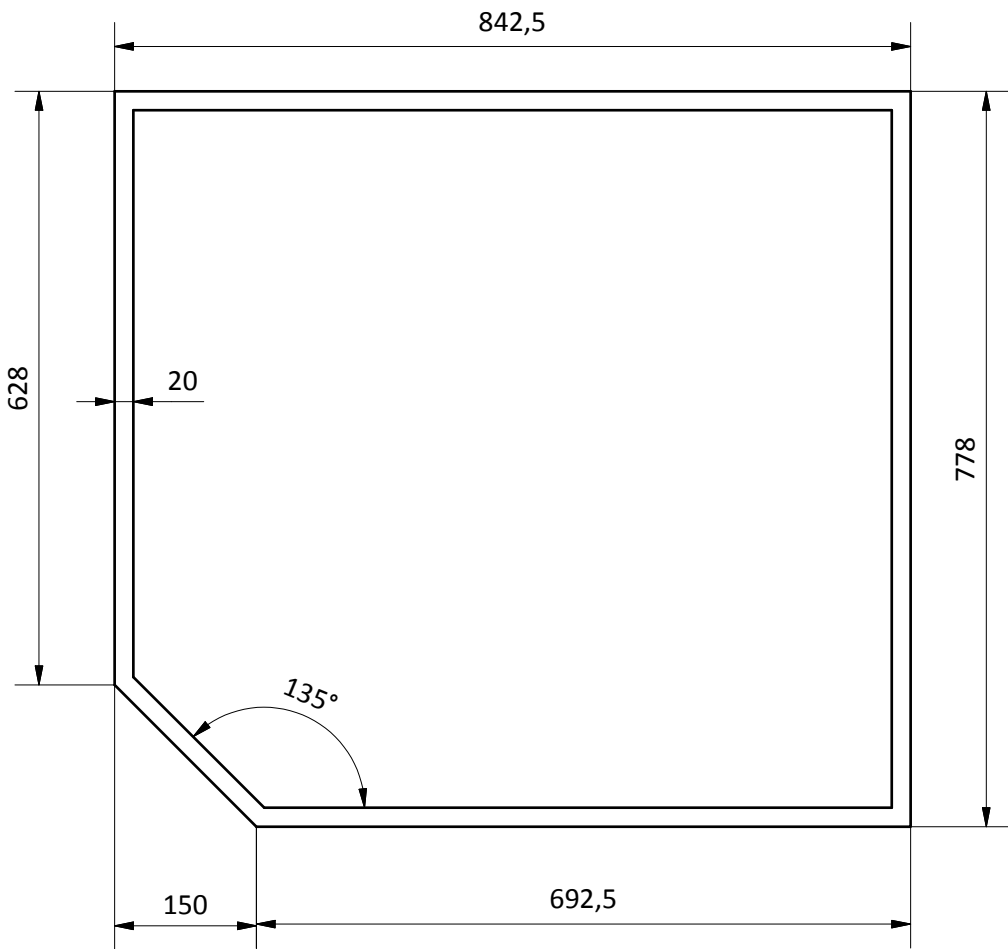

Upper view (1:8)

MATERIAL:		Tolerancias para dimensiones lineales y angulares sin indicación individual de tolerancia, según ISO 2768-1:1989 Zonas de rugosidad no especificada, Ra 3.2					
THREE CLOTH							
ACABADO SUPERFICIAL:							
BLACK							
SCALE:		BELLOW´S DIMENSION 2DOF+SMCBRZ		DRAWN: Adrián Parro		29/07/2014	
				CHECKED:			
 <b>simumak</b> simulation & training solutions		DWG NO:		BRZ-CON-04-FUELLE02			
		REV		SIZE		SHEET	
		A3		1 / 2			

General views

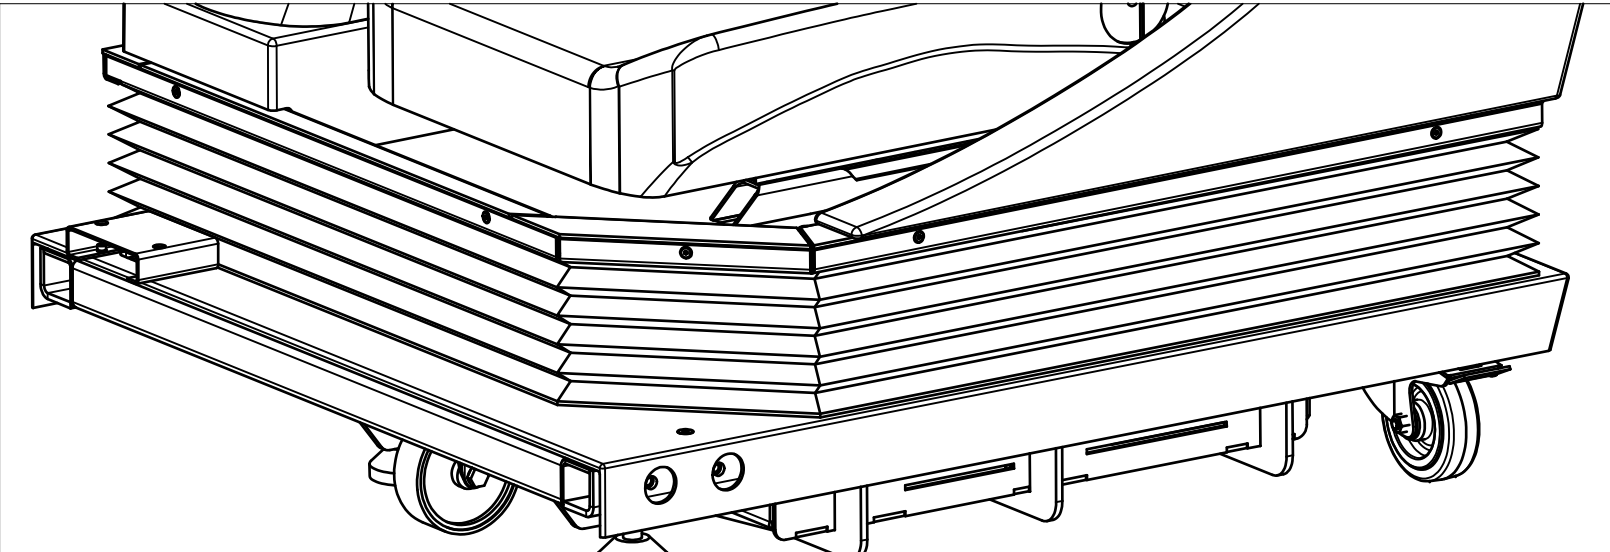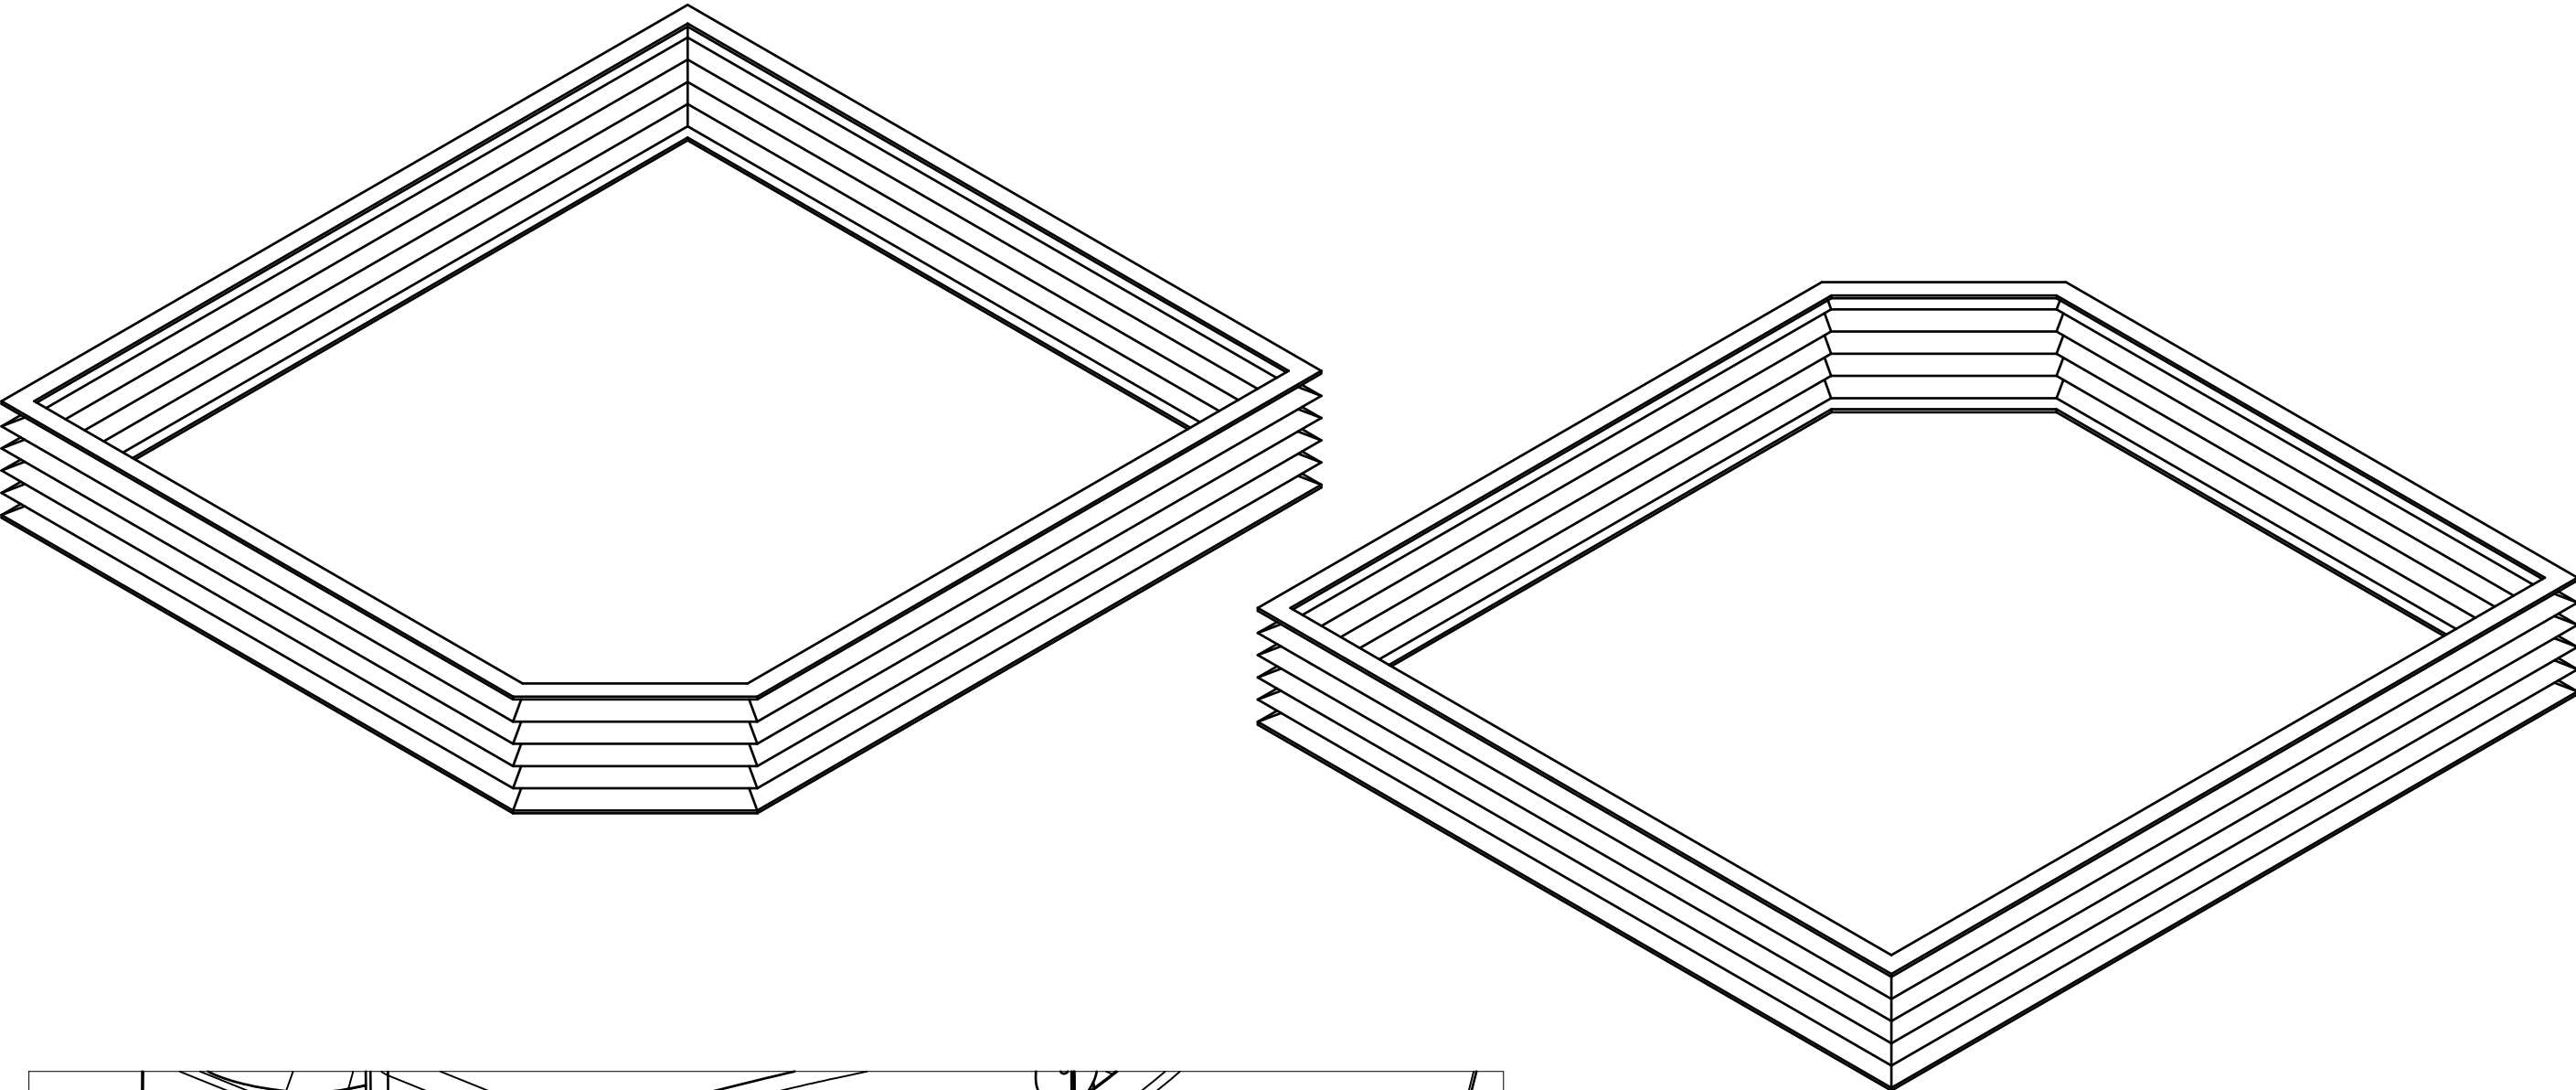

MATERIAL: THREE CLOTH		Tolerancias para dimensiones lineales y angulares sin indicación individual de tolerancia, según ISO 2768-1:1989 Zonas de rugosidad no especificada, Ra 3.2					
ACABADO SUPERFICIAL: BLACK							
SCALE:		BELLOW'S DIMENSION 2DOF+SMCBRZ		DRAWN: Adrián Parro		29/07/2014	
				CHECKED:			
		DWG NO: BRZ-CON-04-FUELLE02		Id. Ref:			
		REV		SIZE A3		SHEET 2 / 2	

