

Datasheet

Next-generation technology and smart innovations for a more connected, keyless building experience.



IQ 3.0 IQ3

Technical specifications:

The IQ 3.0 gateway connects a SALTO Homelok installation to the cloud, enhancing the platform with the BLUEnet connectivity, permitting to use the SALTO SVN-Flex exclusive updating features.

TECHNICAL DATA:

Housing dimensions (H x W x D):	122,5 x 122,5 x 42mm
Weight	313g
Environmental conditions Indoor:	0 °C / +60 °C non condensing (humidity 0%-95%)
IP class:	No IP
Certifications:	CE, FCC/IC, ACMA

ELECTRONIC FEATURES:

Input Voltage:	12V
Max. Input Power:	15W
PoE Class:	0 (IEEE 802.3af / IEEE 802.3at)
WIFI frequency range:	2400 MHz to 2483.5 MHz (IEEE 802.11b/g/n compliant)
Number of locks per IQ 3.0:	Max. 16 (up to 6 Nodes are supported)
Firmware update:	Over the Air (OTA)
LED lamps:	Multi colour led.

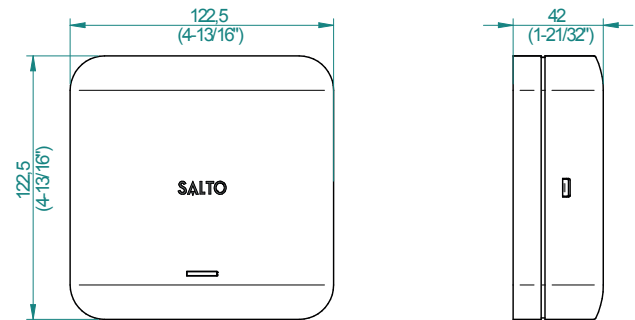
SYSTEM CONNECTIVITY:

Ethernet + PoE:	•
Ethernet + WIFI*:	•

*The WIFI password supports only ASCII characters.

WIFI Tech. Specs

- SSID 32 characters
- Hidden and visible SSID
- WPA2-Personal
- 64 characters ASCII WIFI password (> 8 characters)
- TCP/443 external server connection

TECHNICAL DRAWING:**SALTO PLATFORMS:**

SVN data-on-card	•
JustIN Mobile	•
BLUEnet Wireless	•
Apple Wallet	•

*SALTO Homelok. Cloud-based access control platform

OPTIONS:**Finish:**

Black:	•
White:	•



SALTO Systems.

Get in touch with our team.

Give us a brief summary of your needs, your next project and we'll get back to you.

Spain, UK, France, Germany, Switzerland, The Netherlands, Belgium, Poland, Slovakia, Slovenia, Czech Republic, Denmark, Norway, Sweden, Finland, Italy, Portugal, US (NYC - Atlanta - LV), Canada, Mexico, Costa Rica, Colombia, Puerto Rico, Chile, UAE, India, South Africa, Singapore, China, Hong Kong, Korea, Vietnam, Australia, New Zealand.

**saltosystems
.com**