Technical Performance and Specification Data - Fiche

Kingspan Albion Ultrasteel Plus Unvented Hot Water Cylinders With Internal Thermal Expansion

Cap (L)	ERP Codes	Energy Rating	Standing Loss (W)	Height (mm)	Diameter (mm)	Weight Empty (kg)	Weight Full (kg)	Capacity (Litre)	Heat-up Time (Minutes)	Heat Loss (kW/24Hr)	Coil Primary Flow (L.P.M.)	Coil Pressure Drop (Bar)	Product specifics					
Direct unvented hot water cylinders													AEC - kWh/Y	Load Profile	Efficiency %			
120	AUXD120ERP, AUXD120DDERP	C	45	997	550	30	155	125	62	1.22	N/A	N/A	1394	M	36.80			
150	AUXD150ERP	B	48	1185	550	35	189	154	77	1.31	N/A	N/A	1310	M	39.20			
180	AUXD180ERP	C	53	1367	550	40	223	183	93	1.61	N/A	N/A	2468	L	40.00			
210	AUXD210ERP	C	57	1557	550	45	252	207	108	1.87	N/A	N/A	2706	L	37.80			
250	AUXD250ERP	C	68	1802	550	50	293	243	129	2.13	N/A	N/A	2594	L	39.50			
300	AUXD300ERP	C	73	2072	550	55	342	287	153	2.24	N/A	N/A	2622	L	39.00			
													Indirect Coil Surface Area	Indirect Coil Capacity (Litre)	Indirect Coil (kW Rating)			
120	AUXN120ERP	B	51	997	550	35	154	119	21	1.22	15	0.023	0.67	3.7	14.44			
150	AUXN150ERP	B	55	1183	550	40	189	149	24	1.31	15	0.053	0.77	4.2	16.85			
180	AUXN180ERP	C	67	1367	550	45	224	179	27	1.61	15	0.051	0.86	4.75	18.88			
210	AUXN210ERP	C	78	1557	550	50	255	205	31	1.87	15	0.054	0.86	4.75	17.08			
250	AUXN250ERP	C	89	1802	550	55	297	242	33	2.13	15	0.055	0.96	5.28	20.31			
300	AUXN300ERP	C	93	2072	550	60	346	286	42	2.24	15	0.064	0.96	5.28	19.61			
Solar twin coil unvented hot water cylinders													Dedicated Solar Volume (Litre)	Solar Coil Surface Area	Solar Coil Capacity	Solar Coil (kW Rating)	Indirect Coil Surface Area	Indirect Coil Capacity (Litre)
180	AUXSN180ERP	C	67	1367	550	50	180	175	27	1.61	15	0.051	57	0.77	3.77	16.77	0.77	4.2
210	AUXSN210ERP	C	78	1557	550	55	265	201	29	1.87	15	0.054	69	0.86	4.25	17.67	0.77	4.2
250	AUXSN250ERP	C	89	1802	550	60	310	242	35	2.13	15	0.055	78	0.86	4.75	18.55	0.86	4.75
300	AUXSN300ERP	C	93	2072	550	65	360	285	40	2.24	15	0.064	97	0.96	5.28	19.64	0.86	4.75

Quality standards

hot water association CHARTER MEMBER

Kingspan are Charter Members of the Hot Water Association and undertake to meet the requirements of the Charter Scheme:

- To supply fit for purpose products clearly and honestly described
- To supply products that meet or exceed appropriate standards and building and water regulations
- To provide pre- and post-technical support
- To provide a clear and concise warranty details to customers.

For further details on the Charter, please visit www.hotwater.org.uk/hwa-charter

Unless otherwise stated the products listed on this technical performance and specification data sheet hold the following approves / certified quality standards:

kiwa Partner for progress

BS EN 12897:2016
Water supply. Specification for indirectly heated unvented (closed) storage water heaters.

benchmark

COMPONENTS SUPPLIED WITH ALL CYLINDERS

Installation and maintenance instructions
Spare part no: 026447

Inlet control set – with balanced cold
3 bar PRV 8 bar expansion relief
Spare part no: 025069

Temperature & pressure relief valve
½" BSP x 15mm (10 bar/90°C)
Spare part No: VALVE3 / 4ALT10

Acetal tundish
15 x 22 mm
Spare part no: TUNDPL15ALT

COMPONENTS SUPPLIED WITH SELECTED CYLINDERS

Two port valve
Spare Part No: VALVE2PORTH

Integrated immersion heater
3kW - 14"
Spare part no: 025415

Integrated dual thermostat (immersion heater)
Spare part nos: 024317

Integrated dual thermostat (boiler)
Spare part no: 024316

FLOW RATES

Kingspan unvented cylinders are renowned for their ability to deliver fast flow rates. The diagram here illustrates the speed at which hot water can be heated and distributed reliably throughout the home.

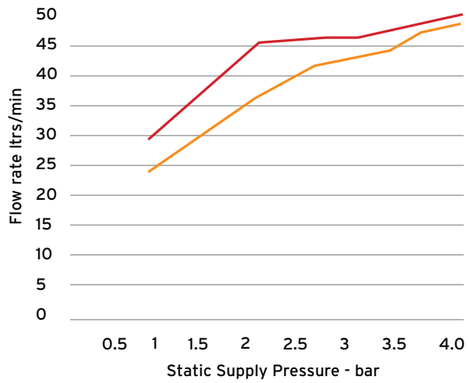

Flowrate with just a hot tap open

Flowrate with both hot tap and cold tap open

All Cylinders

15 dB

3 Bar
Max design pressure (DHW)

Insulation Thickness
50 mm

3.5 Bar
Max primary coil pressure

Service Every
12 Months

Recommended Stored Water
60° TO 70°
Temperature

Recommended Minimum Input
25 L.P.M. @ 1.5 Bar

A full range of spare parts is available from our parts website www.kepartshop.com or tel: 0345 260 0258.