


AGROBOT / DUAL-RAIL POWER CONDITIONER

12 V INPUT | 5 V + 3.3 V | REV B | NATIVE KiCad

01 INPUT PROTECTION

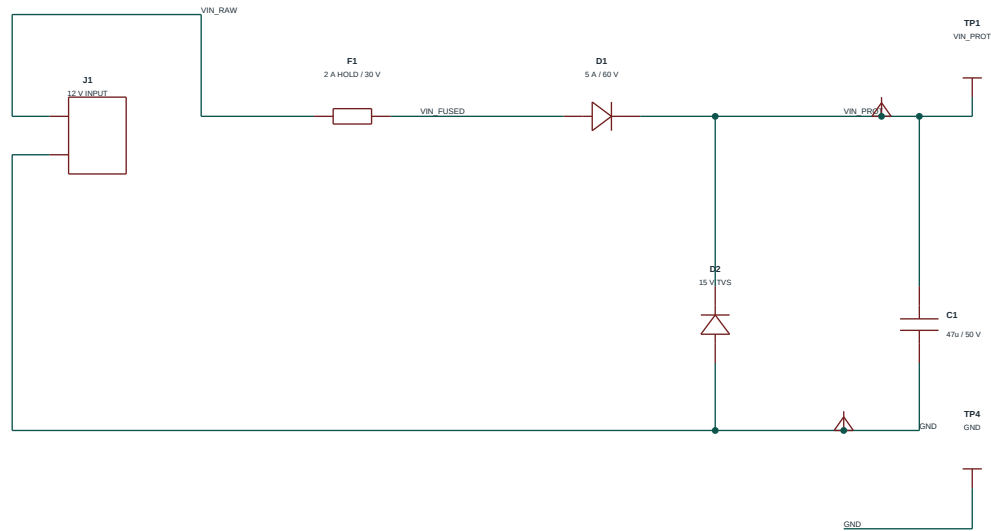

F1: input overcurrent limiting

D1: reverse-polarity blocking

D2: transient clamp; regulated 12 V source

DESIGN TARGETS

5 V: 0.75 A continuous / 1.5 A peak

3.3 V: 0.5 A continuous / 1.0 A peak

Ripple: 20 mVpp / 10 mVpp respectively

20 MHz measurement bandwidth

Unfabricated portfolio design.


Ripple and thermal performance unmeasured.



M3 mounting holes / no electrical connection

TI LMR33630 Rev F, application circuit + DDA pinout

02 5 V CONVERTER

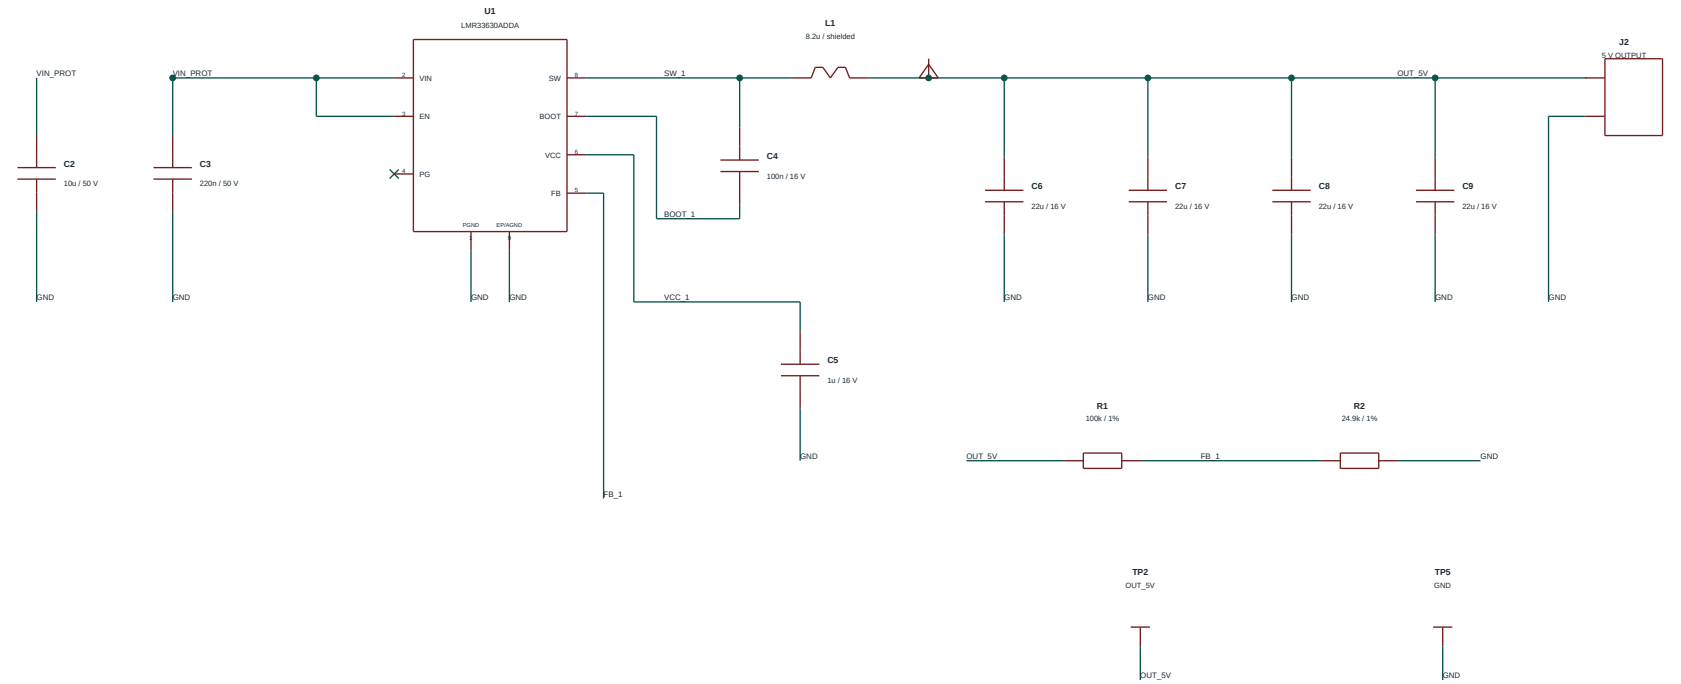

03 3.3 V CONVERTER

