

高硬钢用2刃长颈圆鼻铣刀
Hardened Steels 2-Flute Long Neck Corner Radius Endmills


- 碳素钢 Carbon Steel
- 合金钢 Alloy Steel
- 调质钢 Prehardened Steel
- 高硬度钢 Hardened Steel
- 高硬度钢 Hardened Steel
- 高硬度钢 Hardened Steel

2刃 · 带R角 2-Flute · Corner Radius

平面 侧切 槽 刮痕 曲面 R 螺旋 粗加工 半精加工 精加工 切削条件 B031

外径公差 D≤0.1: 0~-0.005 0.15≤D≤0.9: 0~-0.007 公差 ±0.005 h5 0~-0.005 (mm)

高硬度材料加工用。超群的切削排出性能，可实现高效率加工。
For machining of high-hardness materials. Excellent chip removal performance enables high efficiency.

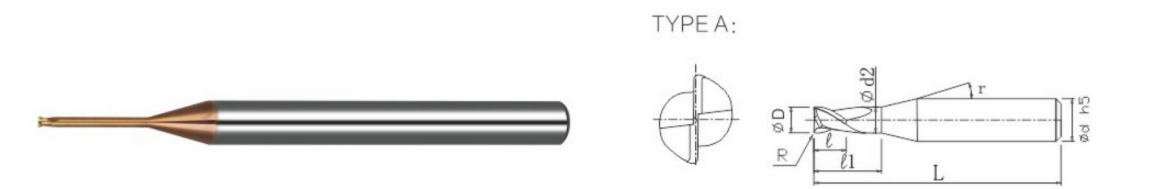

- 在高硬度领域(48-65HRC)的长时间加工中也可实现稳定的长寿命。
- 增大了螺旋角，使得刀刃变得更锋利，而且圆鼻形状可以抑制崩刀。
- Realized stably long tool life against high hardened steels (48 ~ 65HRC).
- Corner radius to prevent flute chipping, and high helix angle for cutting sharpness.

产品代码 Code No.	规格型号 Spec Typ.	外径(D) Dia	角半径(R) Radius	颈长(l1) Under Neck Length	刃长(l) Length of Cut	颈径(d2) Neck Dia	颈角(r) Neck Taper Angle	柄径(d) Shank Dia.	全长(L) Overall Length	定价 Retail Price
FX6MNR01003001	0.1R0.01x0.3L	0.1	R0.01	0.3	0.08	0.085	15°	4	45	
FX6MNR01005001	0.1R0.01x0.5L			0.5	0.08	0.085	15°	4	45	
FX6MNR01003002	0.1R0.02x0.3L		R0.02	0.3	0.08	0.085	15°	4	45	
FX6MNR01005002	0.1R0.02x0.5L			0.5	0.08	0.085	15°	4	45	
FX6MNR015005002	0.15R0.02x0.5L	0.15	R0.02	0.5	0.12	0.13	15°	4	45	
FX6MNR01501002	0.15R0.02x1L			1	0.12	0.13	15°	4	45	
FX6MNR01505005	0.15R0.05x0.5L		R0.05	0.5	0.12	0.13	15°	4	45	
FX6MNR015001005	0.15R0.05x1L			1	0.12	0.13	15°	4	45	
FX6MNR02005002	0.2R0.02x0.5L	0.2	R0.02	0.5	0.16	0.18	15°	4	45	
FX6MNR0201002	0.2R0.02x1L			1	0.16	0.18	15°	4	45	
FX6MNR02015002	0.2R0.02x1.5L			1.5	0.16	0.18	15°	4	45	
FX6MNR0202002	0.2R0.02x2L			2	0.16	0.18	15°	4	45	
FX6MNR02005005	0.2R0.05x0.5L		R0.05	0.5	0.16	0.18	15°	4	45	
FX6MNR0201005	0.2R0.05x1L			1	0.16	0.18	15°	4	45	
FX6MNR02015005	0.2R0.05x1.5L			1.5	0.16	0.18	15°	4	45	
FX6MNR0202005	0.2R0.05x2L			2	0.16	0.18	15°	4	45	
FX6MNR0301002	0.3R0.02x1L	0.3	R0.02	1	0.24	0.27	15°	4	45	
FX6MNR03015002	0.3R0.02x1.5L			1.5	0.24	0.27	15°	4	45	
FX6MNR0302002	0.3R0.02x2L			2	0.24	0.27	15°	4	45	
FX6MNR03025002	0.3R0.02x2.5L			2.5	0.24	0.27	15°	4	45	
FX6MNR0303002	0.3R0.02x3L		R0.05	3	0.24	0.27	15°	4	45	
FX6MNR0301005	0.3R0.05x1L			1	0.24	0.27	15°	4	45	
FX6MNR03015005	0.3R0.05x1.5L			1.5	0.24	0.27	15°	4	45	
FX6MNR0302005	0.3R0.05x2L			2	0.24	0.27	15°	4	45	
FX6MNR03025005	0.3R0.05x2.5L			2.5	0.24	0.27	15°	4	45	
FX6MNR0303005	0.3R0.05x3L			3	0.24	0.27	15°	4	45	
FX6MNR0401005	0.4R0.05x1L		R0.05	1	0.32	0.37	15°	4	45	
FX6MNR0402005	0.4R0.05x2L			2	0.32	0.37	15°	4	45	
FX6MNR0403005	0.4R0.05x3L			3	0.32	0.37	15°	4	45	
FX6MNR0404005	0.4R0.05x4L			4	0.32	0.37	15°	4	45	
FX6MNR040101	0.4R0.1x1L	0.4	R0.1	1	0.32	0.37	15°	4	45	
FX6MNR040201	0.4R0.1x2L			2	0.32	0.37	15°	4	45	
FX6MNR040301	0.4R0.1x3L			3	0.32	0.37	15°	4	45	
FX6MNR040401	0.4R0.1x4L			4	0.32	0.37	15°	4	45	

高硬钢用2刃长颈圆鼻铣刀
Hardened Steels 2-Flute Long Neck Corner Radius Endmills

- 碳素钢 Carbon Steel
- 合金钢 Alloy Steel
- 调质钢 Prehardened Steel
- 高硬度钢 Hardened Steel
- 高硬度钢 Hardened Steel
- 高硬度钢 Hardened Steel

硬质合金 X6m 涂层 65 HRC 内磨 长颈圆鼻 2

产品代码 Code No.	规格型号 Spec Typ.	外径(D) Dia	角半径(R) Corner Radius	颈长(l1) Under Neck Length	刃长(l) Length of Cut	颈径(d2) Neck Dia	颈角(r) Neck Taper Angle	柄径(d) Shank Dia.	全长(L) Overall Length	定价 Retail Price
FX6MNR0501005	0.5R0.05x1L	0.5	R0.05	1	0.4	0.46	15°	4	45	
FX6MNR0502005	0.5R0.05x2L			2	0.4	0.46	15°	4	45	
FX6MNR0503005	0.5R0.05x3L			3	0.4	0.46	15°	4	45	
FX6MNR0504005	0.5R0.05x4L			4	0.4	0.46	15°	4	45	
FX6MNR0505005	0.5R0.05x5L			5	0.4	0.46	15°	4	45	
FX6MNR0506005	0.5R0.05x6L			6	0.4	0.46	15°	4	45	
FX6MNR050101	0.5R0.1x1L		R0.1	1	0.4	0.46	15°	4	45	
FX6MNR050201	0.5R0.1x2L			2	0.4	0.46	15°	4	45	
FX6MNR050301	0.5R0.1x3L			3	0.4	0.46	15°	4	45	
FX6MNR050401	0.5R0.1x4L			4	0.4	0.46	15°	4	45	
FX6MNR050501	0.5R0.1x5L			5	0.4	0.46	15°	4	45	
FX6MNR050601	0.5R0.1x6L			6	0.4	0.46	15°	4	45	
FX6MNR0602005	0.6R0.05x2L	0.6	R0.05	2	0.48	0.56	15°	4	45	
FX6MNR0603005	0.6R0.05x3L			3	0.48	0.56	15°	4	45	
FX6MNR0604005	0.6R0.05x4L			4	0.48	0.56	15°	4	45	
FX6MNR0606005	0.6R0.05x6L			6	0.48	0.56	15°	4	45	
FX6MNR0608005	0.6R0.05x8L			8	0.48	0.56	15°	4	45	
FX6MNR0610005	0.6R0.05x10L			10	0.48	0.56	15°	4	45	
FX6MNR060201	0.6R0.1x2L		R0.1	2	0.48	0.56	15°	4	45	
FX6MNR060301	0.6R0.1x3L			3	0.48	0.56	15°	4	45	
FX6MNR060401	0.6R0.1x4L			4	0.48	0.56	15°	4	45	
FX6MNR060601	0.6R0.1x6L			6	0.48	0.56	15°	4	45	
FX6MNR060801	0.6R0.1x8L			8	0.48	0.56	15°	4	45	
FX6MNR061001	0.6R0.1x10L			10	0.48	0.56	15°	4	45	
FX6MNR0702005	0.7R0.05x2L	0.7	R0.05	2	0.56	0.66	15°	4	45	
FX6MNR0704005	0.7R0.05x4L			4	0.56	0.66	15°	4	45	
FX6MNR0706005	0.7R0.05x6L			6	0.56	0.66	15°	4	45	
FX6MNR070201	0.7R0.1x2L		R0.1	2	0.56	0.66	15°	4	45	
FX6MNR070401	0.7R0.1x4L			4	0.56	0.66	15°	4	45	
FX6MNR070601	0.7R0.1x6L			6	0.56	0.66	15°	4	45	
FX6MNR0802005	0.8R0.05x2L	0.8	R0.05	2	0.56	0.66	15°	4	45	
FX6MNR0803005	0.8R0.05x3L			3	0.56	0.66	15°	4	45	
FX6MNR0804005	0.8R0.05x4L			4	0.56	0.66	15°	4	45	
FX6MNR0806005	0.8R0.05x6L			6	0.56	0.66	15°	4	45	
FX6MNR0808005	0.8R0.05x8L			8	0.56	0.66	15°	4	45	
FX6MNR0810005	0.8R0.05x10L			10	0.56	0.66	15°	4	45	
FX6MNR0812005	0.8R0.05x12L			12	0.56	0.66	15°	4	45	
FX6MNR080201	0.8R0.1x2L		R0.1	2	0.56	0.66	15°	4	45	
FX6MNR080301	0.8R0.1x3L			3	0.56	0.66	15°	4	45	
FX6MNR080401	0.8R0.1x4L			4	0.56	0.66	15°	4	45	
FX6MNR080601	0.8R0.1x6L			6	0.56	0.66	15°	4	45	
FX6MNR080801	0.8R0.1x8L			8	0.56	0.66	15°	4	45	
FX6MNR081001	0.8R0.1x10L			10	0.56	0.66	15°	4	45	
FX6MNR081201	0.8R0.1x12L			12	0.56	0.66	15°	4	45	
FX6MNR080202	0.8R0.2x2L		R0.2	2	0.56	0.66	15°	4	45	
FX6MNR080302	0.8R0.2x3L			3	0.56	0.66	15°	4	45	
FX6MNR080402	0.8R0.2x4L			4	0.56	0.66	15°	4	45	
FX6MNR080602	0.8R0.2x6L			6	0.56	0.66	15°	4	45	
FX6MNR080802	0.8R0.2x8L			8	0.56	0.66	15°	4	45	
FX6MNR081002	0.8R0.2x10L			10	0.56	0.66	15°	4	45	
FX6MNR081202	0.8R0.2x12L			12	0.56	0.66	15°	4	45	