

高硬钢用4刃长颈圆鼻铣刀

Hardened Steels 4-Flute Long Neck Corner Radius Endmills

- 碳素钢 Carbon Steel
- 合金钢 Alloy Steel
- 调质钢 Prehardened Steel
- 高硬度钢 Hardened Steel
- 高硬度钢 Hardened Steel
- 高硬度钢 Hardened Steel

4刃·带R角 4-Flute · Corner Radius

平面 Planing

侧切 Side Cutting

槽切 Slotting

刮底 Die-sinking

曲面 Profiling

R 圆弧 Radius

螺旋 Helical

粗加工 Roughing

半精加工 Semi-Finishing


精加工 Finishing

切削条件 Cutting Conditions

外径公差 1≤D≤3: 0~-0.01 D≤4: 0~-0.015

公差 ±0.005

h5 0~-0.005 (mm)

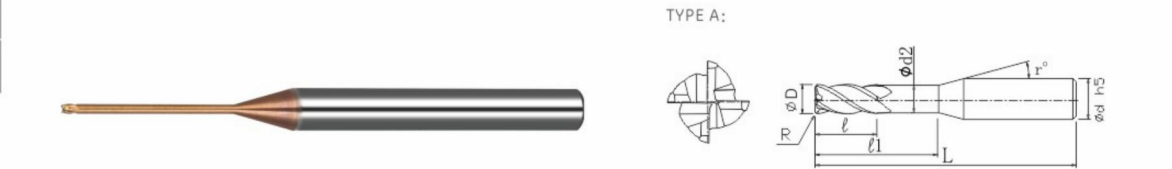

- 在硬度领域(48-65HRC)的长时间加工中也可实现稳定的长寿命。
- 增大了螺旋角,使得刀刃变得更锋利,而且圆鼻形状可以抑制崩刀。
- Realized stably long tool life against high hardened steels (48 ~ 65HRC).
- Corner radius to prevent flute chipping, and high helix angle for cutting sharpness.

产品代码 Code No.	规格型号 Spec Typ.	外径(D) Dia	角半径(R) Corner Radius	颈长(l1) Under Neck Length	刃长(l) Length of Cut	颈径(d2) Neck Dia	颈角(r) Neck Taper Angle	柄径(d) Shank Dia.	全长(L) Overall Length	定价 Retail Price
FX6MNR1004005	1R0.05x4L	1	R0.05	4	0.8	0.95	15°	4	50	
FX6MNR1006005	1R0.05x6L			6	0.8	0.95	15°	4	50	
FX6MNR1008005	1R0.05x8L			8	0.8	0.95	15°	4	50	
FX6MNR1010005	1R0.05x10L			10	0.8	0.95	15°	4	50	
FX6MNR1012005	1R0.05x12L			12	0.8	0.95	15°	4	50	
FX6MNR1016005	1R0.05x16L			16	0.8	0.95	15°	4	50	
FX6MNR100401	1R0.1x4L		R0.1	4	0.8	0.95	15°	4	50	
FX6MNR100601	1R0.1x6L			6	0.8	0.95	15°	4	50	
FX6MNR100801	1R0.1x8L			8	0.8	0.95	15°	4	50	
FX6MNR101001	1R0.1x10L			10	0.8	0.95	15°	4	50	
FX6MNR101201	1R0.1x12L			12	0.8	0.95	15°	4	50	
FX6MNR101601	1R0.1x16L			16	0.8	0.95	15°	4	50	
FX6MNR100402	1R0.2x4L		R0.2	4	0.8	0.95	15°	4	50	
FX6MNR100602	1R0.2x6L			6	0.8	0.95	15°	4	50	
FX6MNR100802	1R0.2x8L			8	0.8	0.95	15°	4	50	
FX6MNR101002	1R0.2x10L			10	0.8	0.95	15°	4	50	
FX6MNR101202	1R0.2x12L			12	0.8	0.95	15°	4	50	
FX6MNR101602	1R0.2x16L			16	0.8	0.95	15°	4	50	
FX6MNR100403	1R0.3x4L		R0.3	4	0.8	0.95	15°	4	50	
FX6MNR100603	1R0.3x6L			6	0.8	0.95	15°	4	50	
FX6MNR100803	1R0.3x8L			8	0.8	0.95	15°	4	50	
FX6MNR101003	1R0.3x10L			10	0.8	0.95	15°	4	50	
FX6MNR101203	1R0.3x12L			12	0.8	0.95	15°	4	50	
FX6MNR101603	1R0.3x16L			16	0.8	0.95	15°	4	50	
FX6MNR120501	1.2R0.1x5L	1.2	R0.1	5	0.96	1.15	15°	4	50	
FX6MNR121001	1.2R0.1x10L			10	0.96	1.15	15°	4	50	
FX6MNR121501	1.2R0.1x15L			15	0.96	1.15	15°	4	50	
FX6MNR120502	1.2R0.2x5L			5	0.96	1.15	15°	4	50	
FX6MNR121002	1.2R0.2x10L		R0.2	10	0.96	1.15	15°	4	50	
FX6MNR121502	1.2R0.2x15L			15	0.96	1.15	15°	4	50	

高硬度材料加工用。超群的切削排出性能,可实现高效率加工。
For machining of high-hardness materials. Excellent chip removal performance enables high efficiency.

高硬钢用4刃长颈圆鼻铣刀

Hardened Steels 4-Flute Long Neck Corner Radius Endmills

- 碳素钢 Carbon Steel
- 合金钢 Alloy Steel
- 调质钢 Prehardened Steel
- 高硬度钢 Hardened Steel
- 高硬度钢 Hardened Steel
- 高硬度钢 Hardened Steel

硬质合金 X6m 涂层 65 HRC 内圆 圆鼻 4刃

产品代码 Code No.	规格型号 Spec Typ.	外径(D) Dia	角半径(R) Corner Radius	颈长(l1) Under Neck Length	刃长(l) Length of Cut	颈径(d2) Neck Dia	颈角(r) Neck Taper Angle	柄径(d) Shank Dia.	全长(L) Overall Length	定价 Retail Price
FX6MNR1506005	1.5R0.05x6L	1.5	R0.05	6	1.2	1.45	15°	4	50	
FX6MNR1508005	1.5R0.05x8L			8	1.2	1.45	15°	4	50	
FX6MNR1510005	1.5R0.05x10L			10	1.2	1.45	15°	4	50	
FX6MNR1512005	1.5R0.05x12L			12	1.2	1.45	15°	4	50	
FX6MNR1516005	1.5R0.05x16L			16	1.2	1.45	15°	4	50	
FX6MNR150601	1.5R0.1x6L		R0.1	6	1.2	1.45	15°	4	50	
FX6MNR150801	1.5R0.1x8L			8	1.2	1.45	15°	4	50	
FX6MNR151001	1.5R0.1x10L			10	1.2	1.45	15°	4	50	
FX6MNR151201	1.5R0.1x12L			12	1.2	1.45	15°	4	50	
FX6MNR151601	1.5R0.1x16L			16	1.2	1.45	15°	4	50	
FX6MNR150602	1.5R0.2x6L		R0.2	6	1.2	1.45	15°	4	50	
FX6MNR150802	1.5R0.2x8L			8	1.2	1.45	15°	4	50	
FX6MNR151002	1.5R0.2x10L			10	1.2	1.45	15°	4	50	
FX6MNR151202	1.5R0.2x12L			12	1.2	1.45	15°	4	50	
FX6MNR151602	1.5R0.2x16L			16	1.2	1.45	15°	4	50	
FX6MNR200601	2R0.1x6L	2	R0.1	6	1.6	1.94	15°	4	50	
FX6MNR200801	2R0.1x8L			8	1.6	1.94	15°	4	50	
FX6MNR201001	2R0.1x10L			10	1.6	1.94	15°	4	50	
FX6MNR201201	2R0.1x12L			12	1.6	1.94	15°	4	50	
FX6MNR201601	2R0.1x16L			16	1.6	1.94	15°	4	50	
FX6MNR202001	2R0.1x20L			20	1.6	1.94	15°	4	50	
FX6MNR200602	2R0.2x6L		R0.2	6	1.6	1.94	15°	4	50	
FX6MNR200802	2R0.2x8L			8	1.6	1.94	15°	4	50	
FX6MNR201002	2R0.2x10L			10	1.6	1.94	15°	4	50	
FX6MNR201202	2R0.2x12L			12	1.6	1.94	15°	4	50	
FX6MNR201602	2R0.2x16L			16	1.6	1.94	15°	4	50	
FX6MNR202002	2R0.2x20L			20	1.6	1.94	15°	4	50	
FX6MNR200603	2R0.3x6L		R0.3	6	1.6	1.94	15°	4	50	
FX6MNR200803	2R0.3x8L			8	1.6	1.94	15°	4	50	
FX6MNR201003	2R0.3x10L			10	1.6	1.94	15°	4	50	
FX6MNR201203	2R0.3x12L			12	1.6	1.94	15°	4	50	
FX6MNR201603	2R0.3x16L			16	1.6	1.94	15°	4	50	
FX6MNR203003	2R0.3x20L			20	1.6	1.94	15°	4	50	
FX6MNR200605	2R0.5x6L	2.5	R0.5	6	1.6	1.94	15°	4	50	
FX6MNR200805	2R0.5x8L			8	1.6	1.94	15°	4	50	
FX6MNR201005	2R0.5x10L			10	1.6	1.94	15°	4	50	
FX6MNR201205	2R0.5x12L			12	1.6	1.94	15°	4	50	
FX6MNR201605	2R0.5x16L			16	1.6	1.94	15°	4	50	
FX6MNR202005	2R0.5x20L			20	1.6	1.94	15°	4	50	
FX6MNR251001	2.5R0.1x10L		R0.1	10	2	2.4	15°	4	50	
FX6MNR252001	2.5R0.1x20L			20	2	2.4	15°	4	60	
FX6MNR253001	2.5R0.1x30L			30	2	2.4	15°	4	75	
FX6MNR251002	2.5R0.2x10L		R0.2	10	2	2.4	15°	4	50	
FX6MNR252002	2.5R0.2x20L			20	2	2.4	15°	4	60	
FX6MNR253002	2.5R0.2x30L			30	2	2.4	15°	4	75	
FX6MNR251003	2.5R0.3x10L		R0.3	10	2	2.4	15°	4	50	
FX6MNR252003	2.5R0.3x20L			20	2	2.4	15°	4	60	
FX6MNR253003	2.5R0.3x30L			30	2	2.4	15°	4	75	
FX6MNR251005	2.5R0.5x10L		R0.5	10	2	2.4	15°	4	50	
FX6MNR252005	2.5R0.5x20L			20	2	2.4	15°	4	60	
FX6MNR253005	2.5R0.5x30L			30	2	2.4	15°	4	75	