

铜·铝合金用4刃平底铣刀

Copper · Aluminum Alloy 4-Flute Square Endmills

4刃·平底铣刀 4-Flute · Square

侧切 Side Cutting

槽切 Slotting

微细加工 Micro Finishing

精加工 Finishing

抗振抑振 Vibration Resistant

切削性能 Cutting Conditions

外径公差 Tolerance

1≤D≤3: 0~-0.01
4≤D≤12: 0~-0.015


h5

0~-0.005 (mm)


高耐溶着性能。最适合铝合金·铜的加工。tac涂层。
High welding resistance makes it ideal for machining aluminum alloys and copper.tac coating.



TYPE A:



TYPE B:

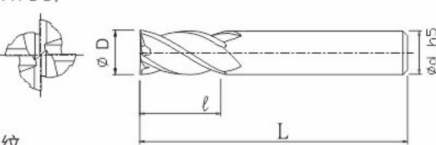

- ✦ 针对铜电极加工用的平底铣刀。
- ✦ 采用锋利度和精加工表面品质兼具的高螺旋角，可抑制加工面产生水平条纹。
- ✦ 采用优化的刀刃形状和tac涂层，可确保长时间进行持续稳定的高品质加工。
- ✦ Flat end milling cutter for copper electrode machining.
- ✦ The high spiral Angle with both edge sharpness and finishing surface quality can restrain the horizontal fringe.
- ✦ High quality and stable milling performance with long tool life by optimized design and tac COATING.


○ 铝合金 Aluminum Alloy N

○ 铜合金 Copper N

○ 树脂 Resin O

产品代码 Code No.	规格型号 Spec Typ.	外径(D) Dia.	刃长(l) Length of Cut	颈角(r) Neck Taper Angle	柄径(d) Shank Dia.	全长(L) Overall Length	形状 Type	价格 Retail Price
FX3E0103	1x3L	1	3	12°	4	50	A	
FX3E0104	1x4L	1	4	12°	4	50	A	
FX3E0154	1.5x4.5L	1.5	4.5	12°	4	50	A	
FX3E0204	2x6L	2	6	12°	4	50	A	
FX3E0254	2.5x7.5L	2.5	7.5	12°	4	50	A	
FX3E0304	3x9L	3	9	12°	4	50	A	
FX3IE0304	3x9L	3	9	12°	4	75	A	
FX3E0304D3	3x9L	3	9	-	3	50	B	
FX3E0304D6	3x9L	3	9	12°	6	50	A	
FX3E0404	4x12L	4	12	-	4	50	B	
FX3IE0404	4x12L	4	12	-	4	75	B	
FX3E0404D6	4x12L	4	12	12°	6	50	A	
FX3E0504	5x14L	5	14	12°	6	50	A	
FX3E0604	6x16L	6	16	-	6	50	B	
FX3E0604L	6x16L	6	16	-	6	60	B	
FX3IE0604	6x18L	6	18	-	6	75	B	
FX3JE0604	6x24L	6	24	-	6	100	B	
FX3E0804	8x22L	8	22	-	8	60	B	
FX3IE0804	8x24L	8	24	-	8	75	B	
FX3JE0804	8x32L	8	32	-	8	100	B	
FX3E1004	10x30L	10	30	-	10	75	B	
FX3JE1004	10x35L	10	35	-	10	100	B	
FX3E1204	12x36L	12	36	-	12	75	B	
FX3JE1204	12x40L	12	40	-	12	100	B	

平底 Square

加工材料 Work Material	铜合金 Copper		铝合金 Aluminum Alloy	
切削速度 Cutting Speed	60m/min		80~150m/min	
外径 Dia.	主轴转速 Spindle Speed	进给速度 Feed	主轴转速 Spindle Speed	进给速度 Feed
	min-1	mm/min	min-1	mm/min
1	19,000	150	48,000	800
1.5	13,000	150	32,000	1,000
2	9,600	150	24,000	1,000
2.5	7,700	200	19,000	1,000
3	6,400	200	16,000	1,000
4	4,800	200	12,000	1,000
5	3,800	200	9,600	1,000
6	3,200	200	8,000	1,000
8	2,400	200	6,000	1,000
10	1,900	200	4,800	1,000
12	1,600	200	4,000	1,000
切深量 Depth of Cut	侧面 Side Milling 			
(D:刃 径Dia.)				
备注 Notes	※ 建议使用油冷冷却方式。 ※ 请以相同的比率调整主轴转速和进给速度。 ※ 严禁用于钢。 ※ Use cutting fluid. ※ Adjust both spindle speed and feed at the same rate. ※ Don't use for cutting steels.			

切削参数参考表

Recommended Milling Conditions

N 铝合金 Aluminum Alloy

N 铜合金 Copper

O 树脂 Resin

平底 Flat bottom