

铜·铝合金用2刃微小径球头铣刀
Copper·Aluminum Alloy 2-Flute Micro Diameter Ball Endmills

2刃·球头

2-Flute·Ball

槽

切槽

曲面

R

细部

半精加工

精加工

超精加工

切削条件

外径公差

$D \leq 0.1: 0 \sim -0.005$
 $0.15 \leq D \leq 0.9: 0 \sim -0.007$


R公差

$R \leq 0.2: \pm 0.003$
 $0.25 \leq R \leq 0.45: \pm 0.005$

h5

$0 \sim -0.005$
(mm)

高耐溶着性能。最适合铝合金·铜的加工。tac涂层。
High welding resistance makes it ideal for machining aluminum alloys and copper.tac coating.

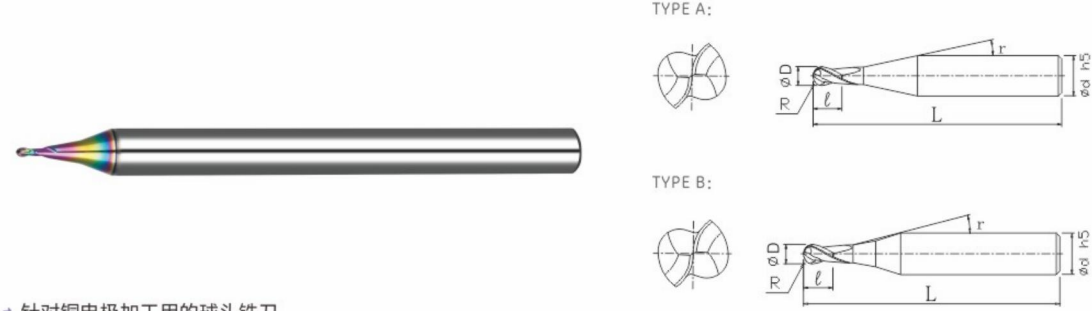

- 针对铜电极加工用的球头铣刀。
- 采用优化的刀刃形状和tac涂层，可确保长时间进行持续稳定的高品质加工。
- Ball end milling cutter for copper electrode machining.
- High quality and stable milling performance with long tool life by optimized design and tac COATING.



产品代码 Code No.	规格型号 Spec Typ.	球头半径(R) Radius	刃长(l) Length of Cut	外径(D) Dia.	颈角(r) Neck Taper Angle	柄径(d) Shank Dia.	全长(L) Overall Length	形状 Type	定价 Retail Price
FX3B000602	R0.03x0.12L	R0.03	0.12	0.06	11°	4	45	A	
FX3B000702	R0.035x0.14L	R0.035	0.14	0.07	11°	4	45	A	
FX3B000802	R0.04x0.16L	R0.04	0.16	0.08	11°	4	45	A	
FX3SB000102	R0.05x0.15L	R0.05	0.15	0.1	11°	4	45	A	
FX3SB000102L	R0.05x0.2L	R0.05	0.2	0.1	11°	4	45	A	
FX3SB000152	R0.075x0.2L	R0.075	0.2	0.15	11°	4	45	A	
FX3SB000152L	R0.075x0.28L	R0.075	0.28	0.15	11°	4	45	A	
FX3SB0022	R0.1x0.4L	R0.1	0.4	0.2	10+20°	4	50	B	
FX3SB0032	R0.15x0.6L	R0.15	0.6	0.3	10+20°	4	50	B	
FX3SB0042	R0.2x0.8L	R0.2	0.8	0.4	10+20°	4	50	B	
FX3SB0052	R0.25x1.0L	R0.25	1	0.5	10+20°	4	50	B	
FX3SB0062	R0.3x1.2L	R0.3	1.2	0.6	10+20°	4	50	B	
FX3SB0072	R0.35x1.4L	R0.35	1.4	0.7	10+20°	4	50	B	
FX3SB0082	R0.4x1.6L	R0.4	1.6	0.8	10+20°	4	50	B	
FX3SB0092	R0.45x1.6L	R0.45	1.8	0.9	10+20°	4	50	B	

切削参数参考表
Recommended Milling Conditions

加工材料 Work Material	铜合金 Copper		铝合金 Aluminum Alloy	
切削速度 Cutting Speed	100~150m/min		150m/min~	
球头半径(R) Radius	主轴转速 Spindle Speed	进给速度 Feed	主轴转速 Spindle Speed	进给速度 Feed
	min-1	mm/min	min-1	mm/min
0.03	50,000	100	50,000	100
0.035	50,000	150	50,000	150
0.04	50,000	200	50,000	200
0.05	50,000	250	50,000	250
0.075	50,000	380	50,000	380
0.1	50,000	500	50,000	500
0.15	50,000	550	50,000	550
0.2	50,000	600	50,000	600
0.25	50,000	630	50,000	630
0.3	50,000	750	50,000	750
0.35	50,000	880	50,000	880
0.4	50,000	1,000	50,000	1,000
0.45	50,000	1,200	50,000	1,200
切深量 Depth of Cut				
(R: 球头半径 Radius)				
备注 Notes	※沟槽加工时，请将进给速度调为上述参数的60%。 ※刀具伸出量请以4D为标准，伸出量超出该标准时请调整切削参数。 ※建议使用吹气或油雾冷却方式。 ※请以相同的比率调整主轴转速和进给速度。 ※ When slotting, reduce the feed by 60% from the above values. ※ Length of overhang is 4 times Dia. as standard. When it is longer than 4 times Dia., adjust the conditions listed above. ※ Recommended airblow or oil mist. ※ Adjust both spindle speed and feed at the same rate.			