

铜·铝合金用2刃长颈球头铣刀

Copper · Aluminum Alloy 2-Flute Long Neck Ball Endmills

2刃·球头2-Flute · Ball

槽切
Slotting

切槽
Die-sinking

曲面
Profiling

圆弧
Radius

微细
Micro

半精加工
Semi-Finishing

精加工
Finishing

超精加工
Hv

切削条件
Cutting Conditions

外径公差
Diameter Tolerance

$D \leq 0.9$: 0 ~ -0.007
 $1 \leq D \leq 3$: 0 ~ -0.01
 $D \leq 4$: 0 ~ -0.015


R公差
R Tolerance

$R \leq 0.2$: ± 0.003
 $0.25 \leq R \leq 2$: ± 0.005

h5

0 ~ -0.005 (mm)

高耐溶着性能。最适合铝合金·铜的加工。tac涂层。
High welding resistance makes it ideal for machining aluminum alloys and copper.tac coating.

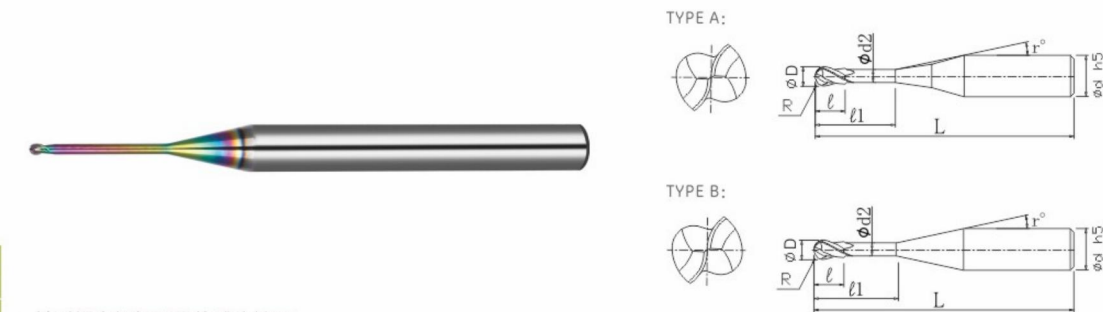

- 针对铜电极加工用的球头铣刀。
- 采用优化的刀刃形状和tac涂层，可确保长时间进行持续稳定的高品质加工。
- Ball end milling cutter for copper electrode machining.
- High quality and stable milling performance with long tool life by optimized design and tac COATING.



产品代码 Code No.	规格型号 Spec Typ.	球头半径(R) Radius	颈长(l1) Under Neck Length	刃长(l) Length of Cut	外径(D) Dia.	颈径(d2) Neck Dia.	颈角(r) Neck Taper Angle	柄径(d) Shank Dia.	全长(L) Overall Length	定价 Retail Price
FX3NB02006	R0.1x0.6L	R0.1	0.6	0.2	0.2	0.18	10+20°	4	50	
FX3NB0201	R0.1x1L		1	0.2	0.2	0.18	10+20°	4	50	
FX3NB02015	R0.1x1.5L		1.5	0.2	0.2	0.18	10+20°	4	50	
FX3NB0202	R0.1x2L		2	0.2	0.2	0.18	10+20°	4	50	
FX3NB0203	R0.1x3L	R0.15	3	0.2	0.2	0.18	10+20°	4	50	
FX3NB0301	R0.15x1L		1	0.3	0.3	0.27	10+20°	4	50	
FX3NB03015	R0.15x1.5L		1.5	0.3	0.3	0.27	10+20°	4	50	
FX3NB0302	R0.15x2L		2	0.3	0.3	0.27	10+20°	4	50	
FX3NB0303	R0.15x3L		3	0.3	0.3	0.27	10+20°	4	50	
FX3NB0304	R0.15x4L	R0.2	4	0.3	0.3	0.27	10+20°	4	50	
FX3NB0305	R0.15x5L		5	0.3	0.3	0.27	10+20°	4	50	
FX3NB0401	R0.2x1Lx0.4L		1	0.4	0.4	0.37	10+20°	4	50	
FX3NB04015	R0.2x1.5L		1.5	0.4	0.4	0.37	10+20°	4	50	
FX3NB0402	R0.2x2L		2	0.4	0.4	0.37	10+20°	4	50	
FX3NB0403	R0.2x3L		3	0.4	0.4	0.37	10+20°	4	50	
FX3NB0404	R0.2x4L	R0.25	4	0.4	0.4	0.37	10+20°	4	50	
FX3NB0405	R0.2x5L		5	0.4	0.4	0.37	10+20°	4	50	
FX3NB0406	R0.2x6L		6	0.4	0.4	0.37	10+20°	4	50	
FX3NB0502	R0.25x2L		2	0.5	0.5	0.46	10+20°	4	50	
FX3NB0503	R0.25x3L		3	0.5	0.5	0.46	10+20°	4	50	
FX3NB0504	R0.25x4L		4	0.5	0.5	0.46	10+20°	4	50	
FX3NB0505	R0.25x5L	R0.3	5	0.5	0.5	0.46	10+20°	4	50	
FX3NB0506	R0.25x6L		6	0.5	0.5	0.46	10+20°	4	50	
FX3NB0508	R0.25x8L		8	0.5	0.5	0.46	10+20°	4	50	
FX3NB0602	R0.3x2L		2	0.6	0.6	0.56	10+20°	4	50	
FX3NB0603	R0.3x3L		3	0.6	0.6	0.56	10+20°	4	50	
FX3NB0604	R0.3x4L		4	0.6	0.6	0.56	10+20°	4	50	
FX3NB0606	R0.3x6L	R0.3	6	0.6	0.6	0.56	10+20°	4	50	
FX3NB0608	R0.3x8L		8	0.6	0.6	0.56	10+20°	4	50	
FX3NB0610	R0.3x10L		10	0.6	0.6	0.56	10+20°	4	50	

铜·铝合金用2刃长颈球头铣刀

Copper · Aluminum Alloy 2-Flute Long Neck Ball Endmills



产品代码 Code No.	规格型号 Spec Typ.	球半径(R) Radius	颈长(l1) Under Neck Length	刃长(l) Length of Cut	刃径(D) Dia.	颈径(d2) Neck Dia.	颈角(r) Neck Taper Angle	柄径(d) Shank Dia.	全长(L) Overall Length	定价 Retail Price
FX3NB0704	R0.35x4L	R0.35	4	0.7	0.7	0.66	10+20°	4	50	
FX3NB0705	R0.35x5L		5	0.7	0.7	0.66	10+20°	4	50	
FX3NB0802	R0.4x2L	R0.4	2	0.8	0.8	0.76	10+20°	4	50	
FX3NB0803	R0.4x3L		3	0.8	0.8	0.76	10+20°	4	50	
FX3NB0804	R0.4x4L		4	0.8	0.8	0.76	10+20°	4	50	
FX3NB0806	R0.4x6L		6	0.8	0.8	0.76	10+20°	4	50	
FX3NB0808	R0.4x8L		8	0.8	0.8	0.76	10+20°	4	50	
FX3NB0810	R0.4x10L		10	0.8	0.8	0.76	10+20°	4	50	
FX3NB1003	R0.5x3L	R0.5	3	1	1	0.95	12°	4	50	
FX3NB1004	R0.5x4L		4	1	1	0.95	12°	4	50	
FX3NB1006	R0.5x6L		6	1	1	0.95	12°	4	50	
FX3NB1008	R0.5x8L		8	1	1	0.95	12°	4	50	
FX3NB1010	R0.5x10L		10	1	1	0.95	12°	4	50	
FX3NB1012	R0.5x12L		12	1	1	0.95	12°	4	50	
FX3NB1016	R0.5x16L	R0.75	16	1	1	0.95	12°	4	50	
FX3NB1504	R0.75x4L		4	1.5	1.5	1.45	12°	4	50	
FX3NB1506	R0.75x6L		6	1.5	1.5	1.45	12°	4	50	
FX3NB1508	R0.75x8L		8	1.5	1.5	1.45	12°	4	50	
FX3NB1510	R0.75x10L		10	1.5	1.5	1.45	12°	4	50	
FX3NB1512	R0.75x12L		12	1.5	1.5	1.45	12°	4	50	
FX3NB1516	R0.75x16L	R1	16	1.5	1.5	1.45	12°	4	50	
FX3NB2006	R1x6L		6	2	2	1.94	12°	4	50	
FX3NB2008	R1x8L		8	2	2	1.94	12°	4	50	
FX3NB2010	R1x10L		10	2	2	1.94	12°	4	50	
FX3NB2012	R1x12L		12	2	2	1.94	12°	4	50	
FX3NB2016	R1x16L		16	2	2	1.94	12°	4	50	
FX3NB2018	R1x18L	R1.5	18	2	2	1.94	12°	4	50	
FX3NB2020	R1x20L		20	2	2	1.94	12°	4	50	
FX3NB3008	R1.5x8L		8	3	3	2.85	12°	4	50	
FX3NB3010	R1.5x10L		10	3	3	2.85	12°	4	50	
FX3NB3012	R1.5x12L		12	3	3	2.85	12°	4	50	
FX3NB3016	R1.5x16L		16	3	3	2.85	12°	4	50	
FX3NB3008L	R1.5x8L	R2	8	3	3	2.85	12°	6	60	
FX3NB3010L	R1.5x10L		10	3	3	2.85	12°	6	60	
FX3NB3012L	R1.5x12L		12	3	3	2.85	12°	6	60	
FX3NB3016L	R1.5x16L		16	3	3	2.85	12°	6	60	
FX3NB3020L	R1.5x20L		20	3	3	2.85	12°	6	60	
FX3NB4012L	R2x12L		12	4	4	3.8	12°	6	60	
FX3NB4016L	R2x16L	R2	16	4	4	3.8	12°	6	60	
FX3NB4020L	R2x20L		20	4	4	3.8	12°	6	60	