DATA SHEET

NEC

PHOTOCOUPLER

PS2571-1,-4, PS2571L-1,-4

HIGH ISOLATION VOLTAGE SAFETY STANDARD TYPE MULTI PHOTOCOUPLER SERIES

–NEPOC™ Series–

DESCRIPTION

The PS2571-1, -4 and PS2571L-1, -4 are optically coupled isolators containing GaAs light emitting diodes and NPN silicon phototransistors.

The PS2571-1, -4 are in a plastic DIP (Dual In-line Package) and the PS2571L-1, -4 are lead bending type (Gull-wing) for surface mount.

★ FEATURES

- High isolation voltage (BV = 5 000 Vr.m.s.)
- High current transfer ratio (CTR = 200 % TYP.)
- High-speed switching (t_r = 3 μs TYP., t_f = 5 μs TYP.)
- Ordering number of taping product : PS2571L-1-E3, E4, F3, F4
- UL approved: File No. E72422 (S)
- BSI approved: No. 8343/8344
- CSA approved: No. CA 101391
- NEMKO approved: No. P98102650
- DEMKO approved: No. 308152
- SEMKO approved: No. 9832161/01
- FIMKO approved: No. F1 11899
- VDE0884 approved (Option)

APPLICATIONS

- Power supply
- Telephone, FAX
- FA/OA equipment
- Programmable logic controller

Document No. P13857EJ2V0DS00 (2nd edition)
Date Published August 1999 NS CP(K)
Printed in Japan

The mark ★ shows major revised points.

★ **PACKAGE DIMENSIONS (in millimeters)**

DIP type

PS2571-1

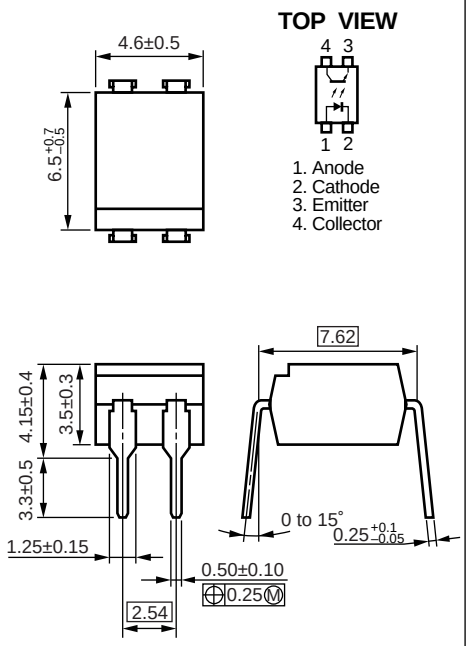

PS2571-4

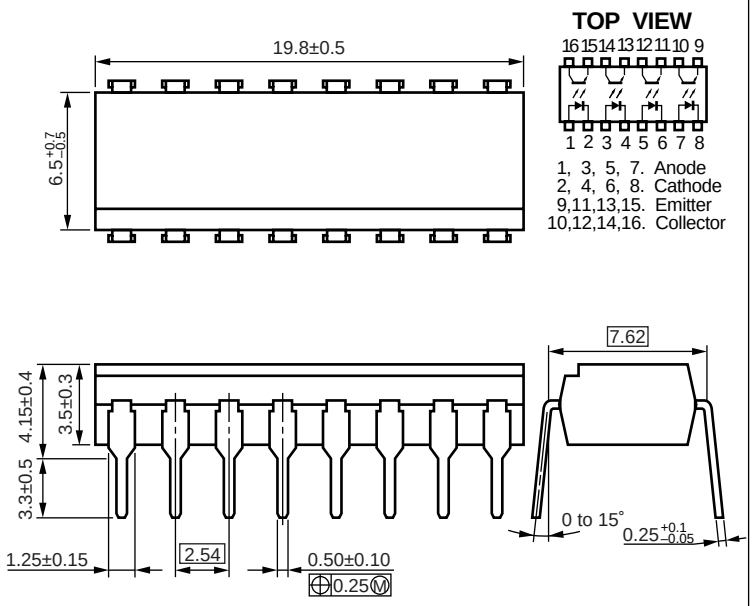

PS2571-1

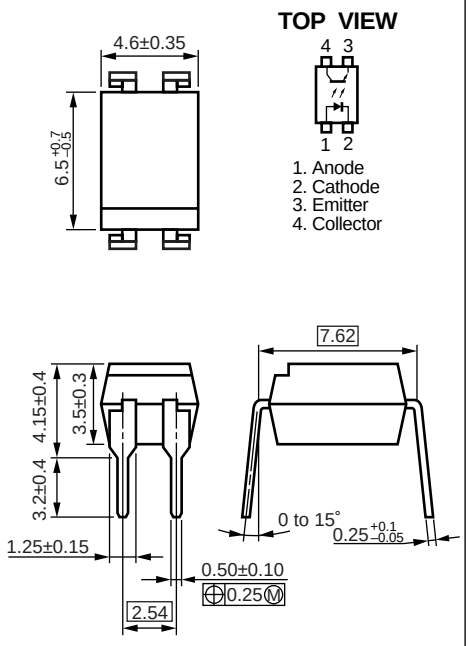

PS2571-4

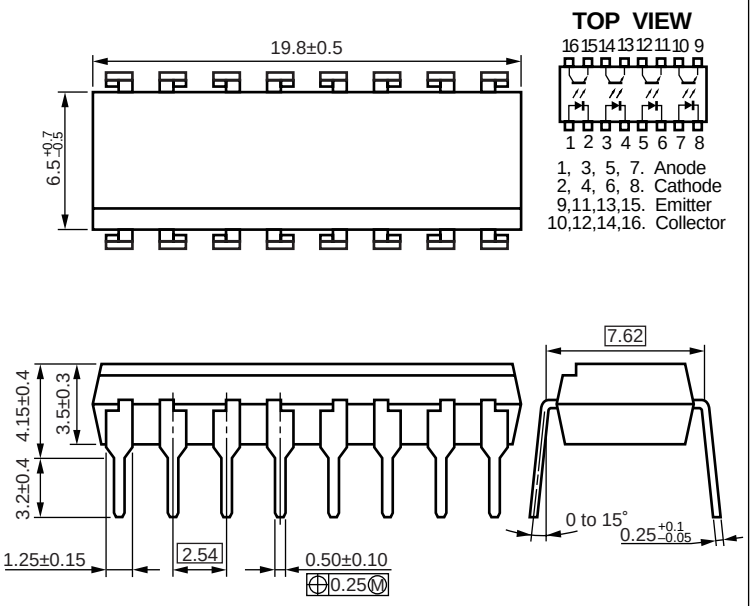

Lead bending type

PS2571L-1

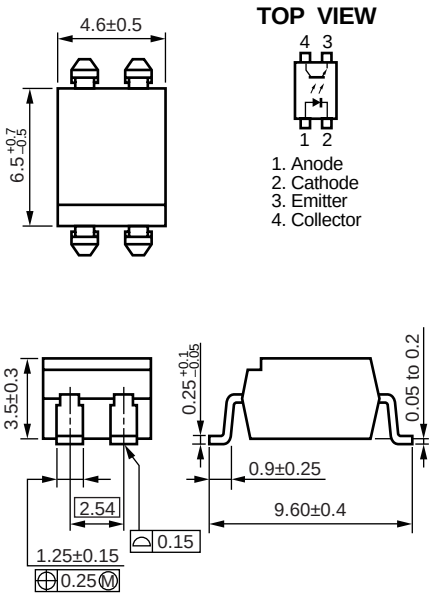

PS2571L-4

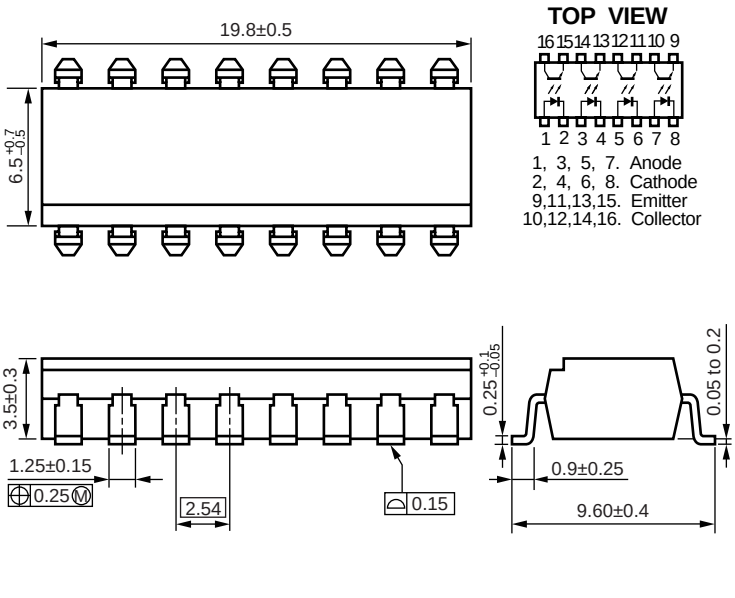

PS2571L-1

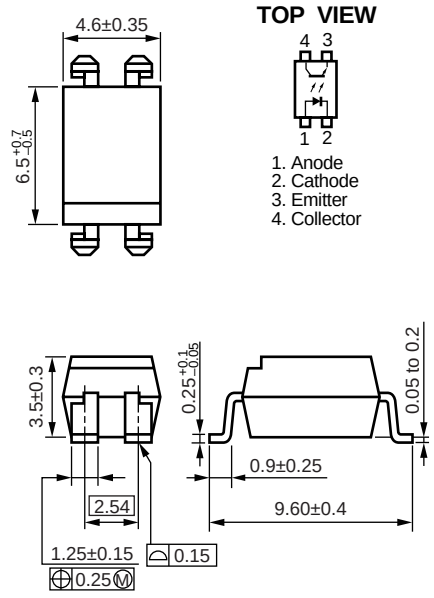

PS2571L-4

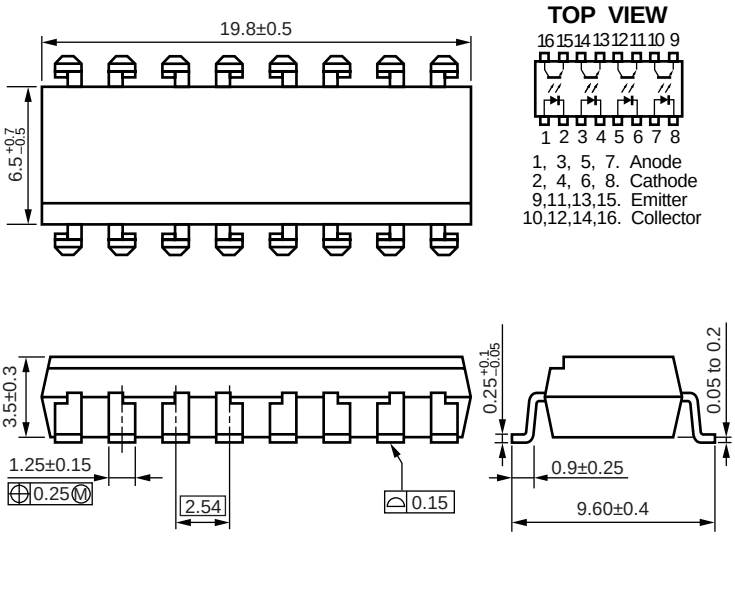

Lead bending type for long distance

PS2571L1-1

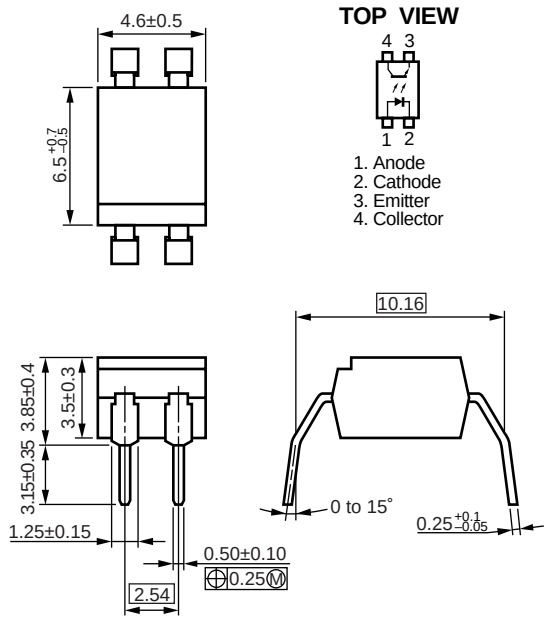

PS2571L2-1

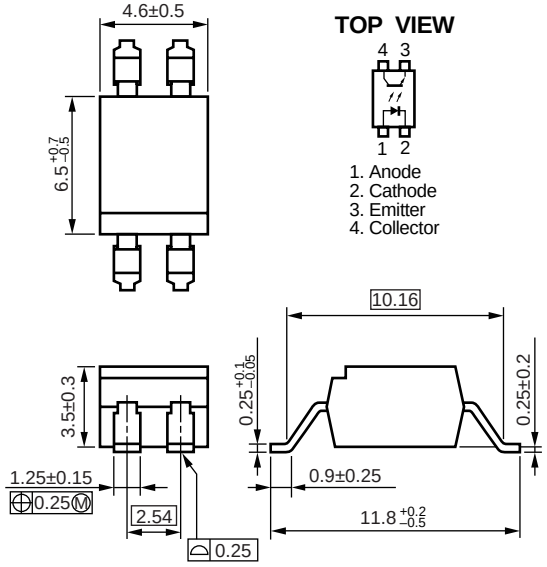

PS2571L1-1

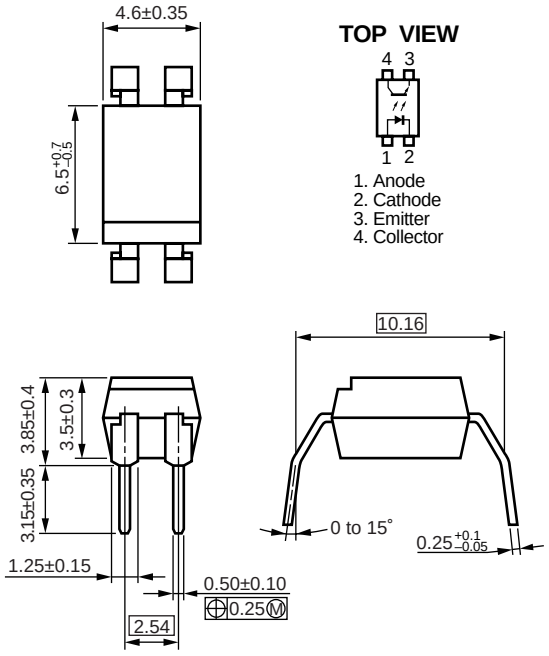

PS2571L2-1

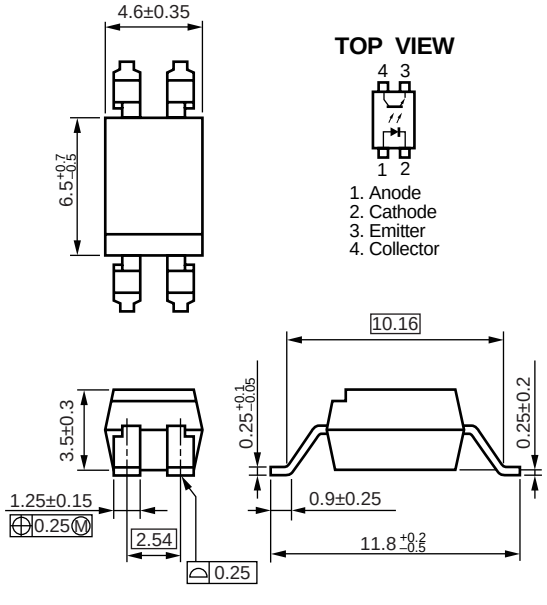

PHOTOCOUPLER CONSTRUCTION

Parameter	Unit (MIN.)
Air Distance	7 mm
Outer Creepage Distance	7 mm
Inner Creepage Distance	4 mm
Isolation Thickness	0.4 mm

★ ORDERING INFORMATION

Part Number	Package	Packing Style	Safety Standard Approval	Application Part Number *1
PS2571-1	4-pin DIP	Magazine case 100 pcs	Standard products (UL, CSA, BSI, NEMKO, SEMKO, DEMKO, FIMKO approved)	PS2571-1
PS2571L-1				
PS2571L-1-E3		Embossed Tape 1 000 pcs/reel		
PS2571L-1-E4				
PS2571L-1-F3		Embossed Tape 2 000 pcs/reel		
PS2571L-1-F4				
PS2571-4	16-pin DIP	Magazine case 20 pcs		PS2571-4
PS2571L-4				
PS2571-1-V	4-pin DIP	Magazine case 100 pcs	VDE0884 approved products (Option)	PS2571-1
PS2571L-1-V				
PS2571L-1-V-E3		Embossed Tape 1 000 pcs/reel		
PS2571L-1-V-E4				
PS2571L-1-V-F3		Embossed Tape 2 000 pcs/reel		
PS2571L-1-V-F4				
PS2571-4-V	16-pin DIP	Magazine case 20 pcs		PS2571-4
PS2571L-4-V				

***1** For the application of the Safety Standard, following part number should be used.

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C, unless otherwise specified)

Parameter		Symbol	Ratings		Unit
			PS2571-1, PS2571L-1	PS2571-4, PS2571L-4	
Diode	Forward Current (DC)	I_F	50		mA
	Reverse Voltage	V_R	6		V
	Power Dissipation Derating	ΔP_D/°C	0.7	0.55	mW/°C
	Power Dissipation	P_D	70	55	mW/ch
	Peak Forward Current *1	I_{FP}	1		A
Transistor	Collector to Emitter Voltage	V_{CEO}	40		V
	Emitter to Collector Voltage	V_{ECO}	5		V
	Collector Current	I_C	40		mA/ch
	Power Dissipation Derating	ΔP_C/°C	1.5	1.2	mW/°C
	Power Dissipation	P_C	150	120	mW/ch
Isolation Voltage *2		BV	5 000		Vr.m.s.
Operating Ambient Temperature		T_A	–55 to +100		°C
Storage Temperature		T_{stg}	–55 to +150		°C

***1** PW = 100 μs, Duty Cycle = 1 %

***2** AC voltage for 1 minute at T_A = 25 °C, RH = 60 % between input and output

ELECTRICAL CHARACTERISTICS (T_A = 25 °C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Diode	Forward Voltage	V_F	I_F = 10 mA		1.2	1.4	V
	Reverse Current	I_R	V_R = 5 V			5	μA
	Terminal Capacitance	C_t	V = 0 V, f = 1.0 MHz		50		pF
Transistor	Collector to Emitter Dark Current	I_{CEO}	V_{CE} = 40 V, I_F = 0 mA			100	nA
Coupled	Current Transfer Ratio (I_C/I_F) *1	CTR	I_F = 5 mA, V_{CE} = 5 V	80	200	400	%
	Collector Saturation Voltage	$V_{CE (sat)}$	I_F = 10 mA, I_C = 2 mA			0.3	V
	Isolation Resistance	R_{I-O}	V_{I-O} = 1.0 kV_{DC}	10^{11}			Ω
	Isolation Capacitance	C_{I-O}	V = 0 V, f = 1.0 MHz		0.5		pF
	Rise Time *2	t_r	V_{CC} = 10 V, I_C = 2 mA, R_L = 100 Ω		3		μs
	Fall Time *2	t_f			5		

***1** CTR rank (PS2571-1,PS2571L-1 only)

D : 100 to 300 %

***2** Test Circuit for Switching Time

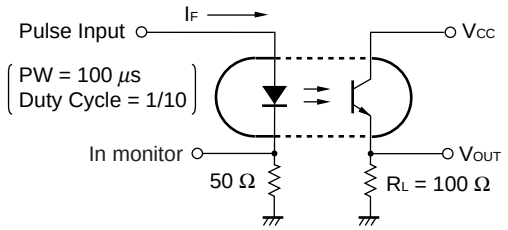

TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise specified)

DIODE POWER DISSIPATION vs. AMBIENT TEMPERATURE

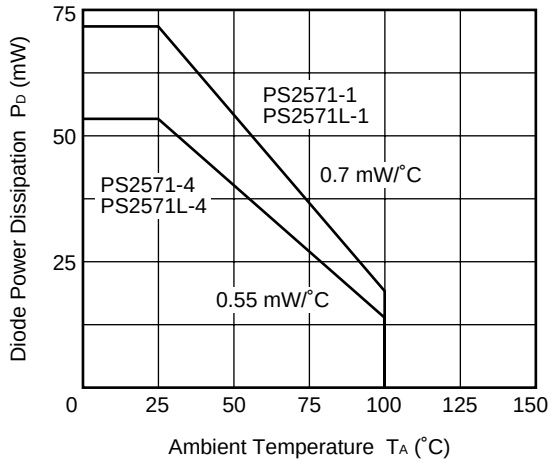

TRANSISTOR POWER DISSIPATION vs. AMBIENT TEMPERATURE

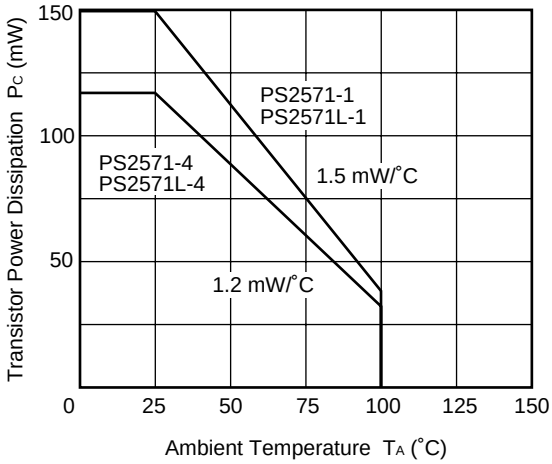

FORWARD CURRENT vs. FORWARD VOLTAGE

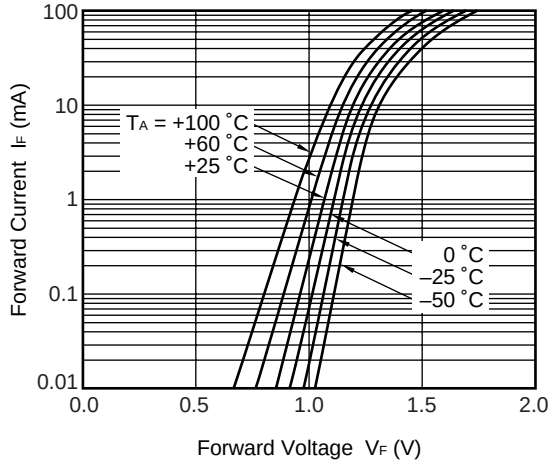

COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

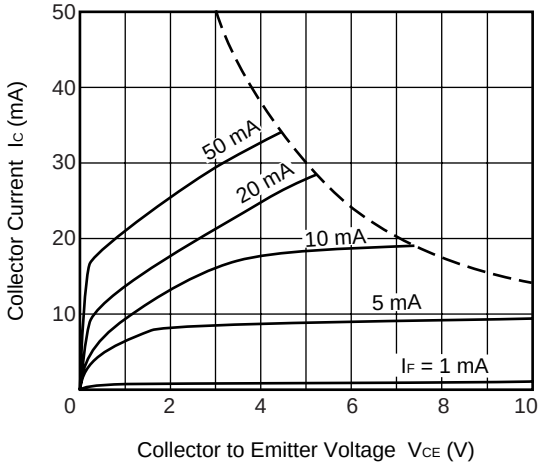

COLLECTOR TO EMITTER DARK CURRENT vs. AMBIENT TEMPERATURE

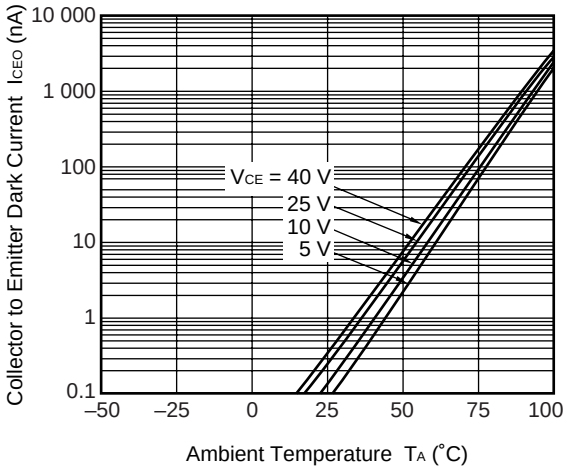

COLLECTOR CURRENT vs. COLLECTOR SATURATION VOLTAGE

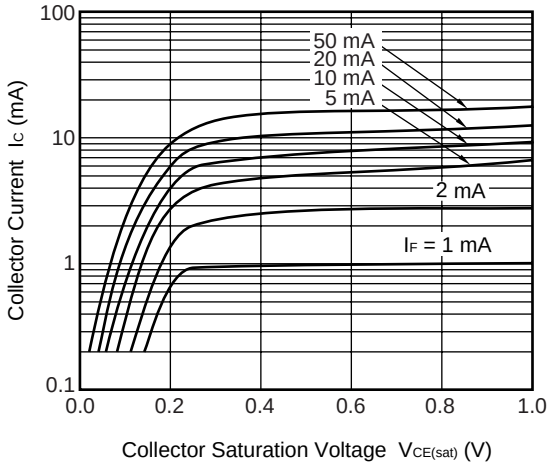

NORMALIZED CURRENT TRANSFER RATIO vs. AMBIENT TEMPERATURE

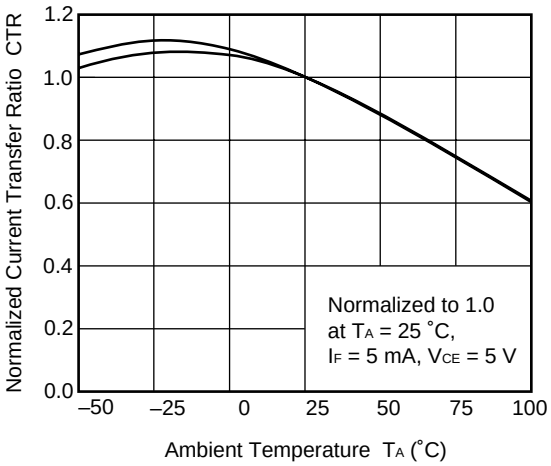

CURRENT TRANSFER RATIO vs. FORWARD CURRENT

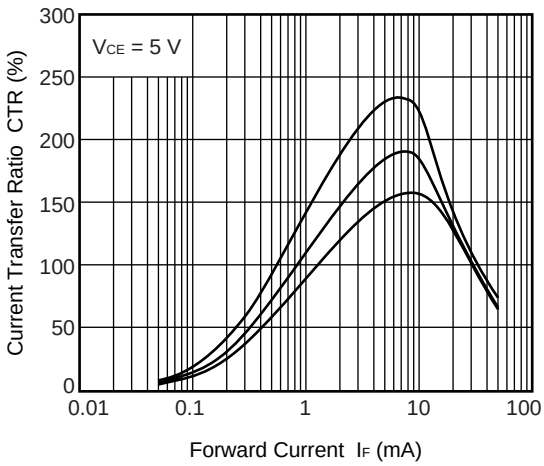

SWITCHING TIME vs. LOAD RESISTANCE

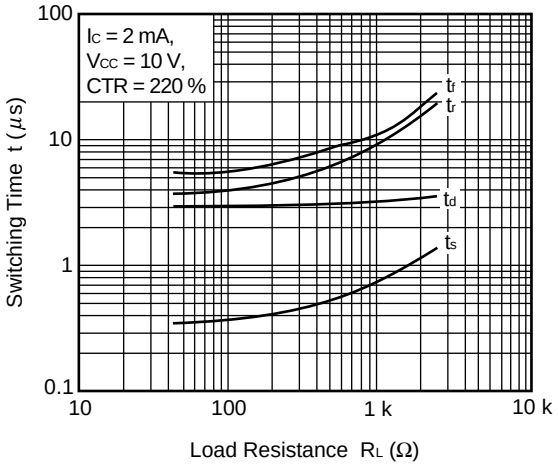

SWITCHING TIME vs. LOAD RESISTANCE

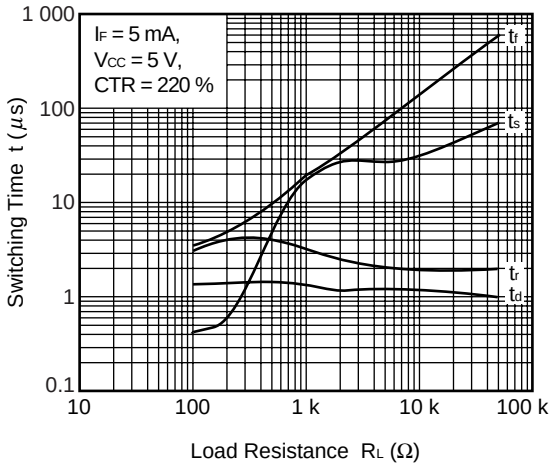

FREQUENCY RESPONSE

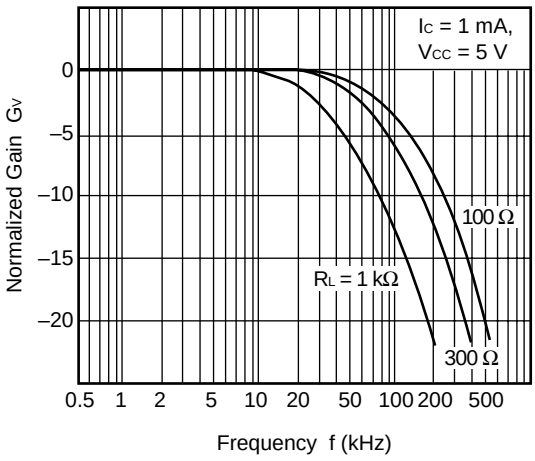

LONG TERM CTR DEGRADATION

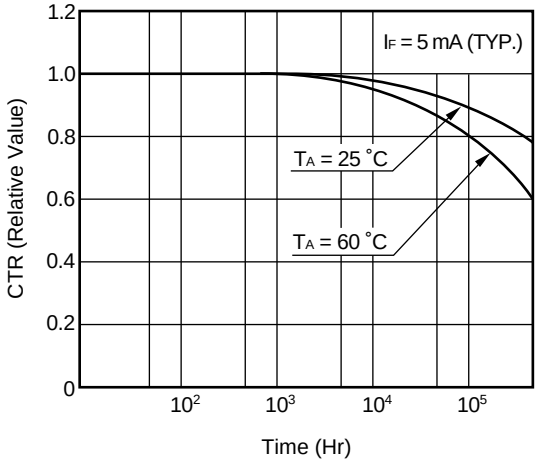

Remark The graphs indicate nominal characteristics.

★ **TAPING SPECIFICATIONS (in millimeters)**

Outline and Dimensions (Tape)

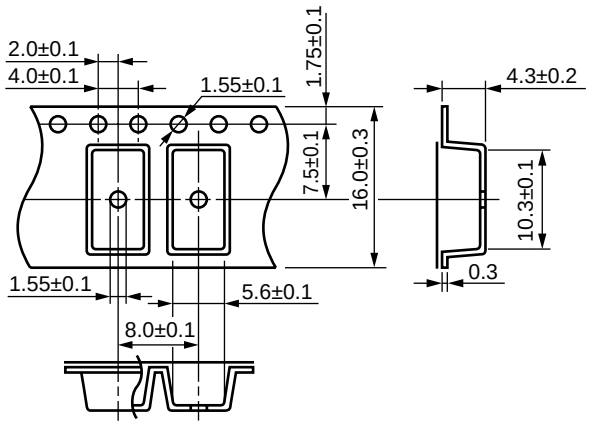

Tape Direction

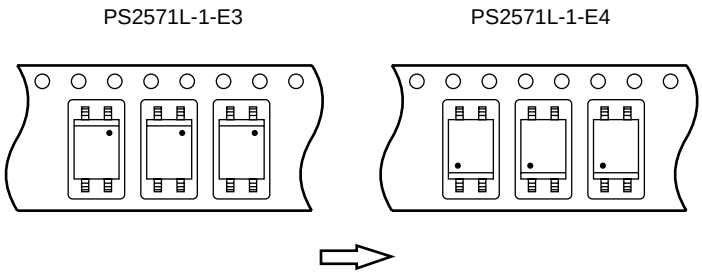

Outline and Dimensions (Reel)

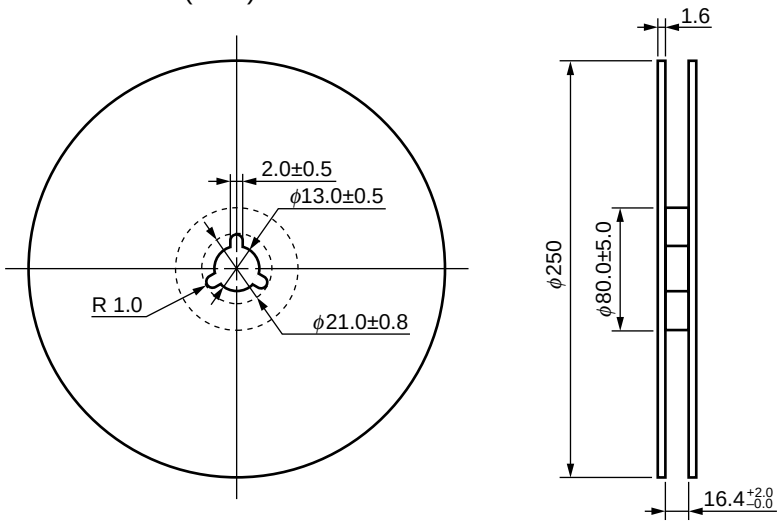

Packing: 1 000 pcs/reel

Outline and Dimensions (Tape)

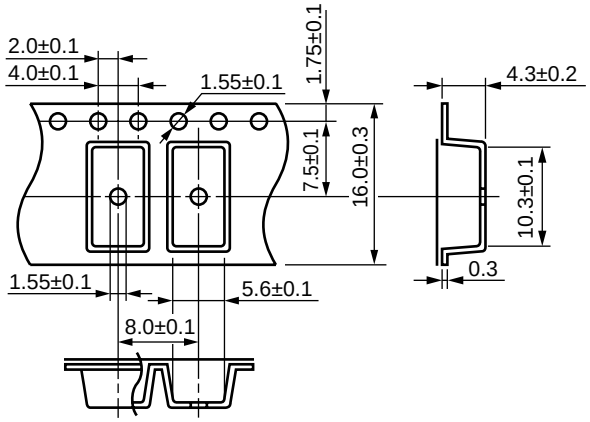

Tape Direction

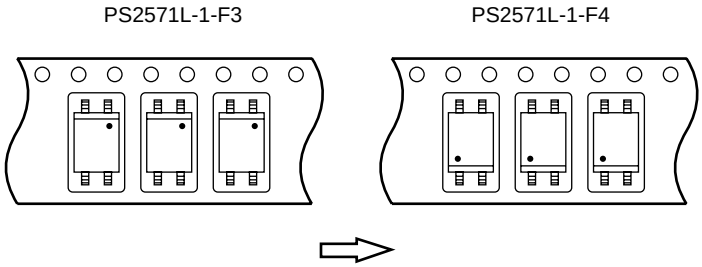

Outline and Dimensions (Reel)

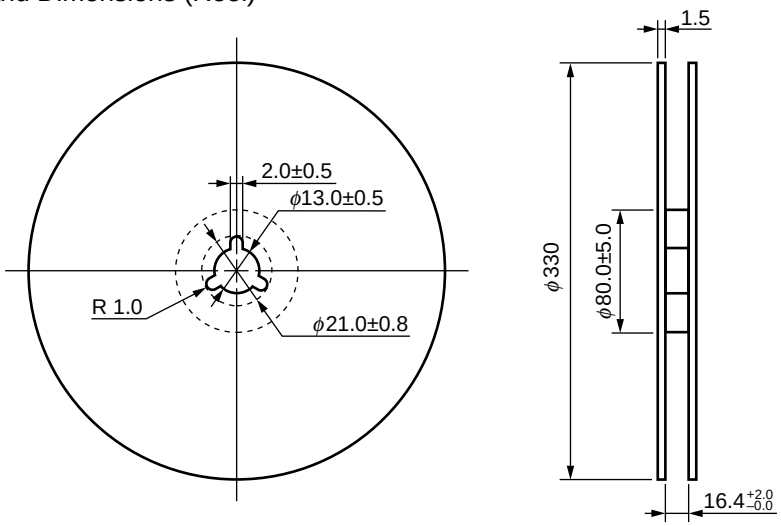

Packing: 2 000 pcs/reel

RECOMMENDED SOLDERING CONDITIONS

(1) Infrared reflow soldering

- Peak reflow temperature 235 °C (package surface temperature)
- Time of temperature higher than 210 °C 30 seconds or less
- Number of reflows Three
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

Recommended Temperature Profile of Infrared Reflow

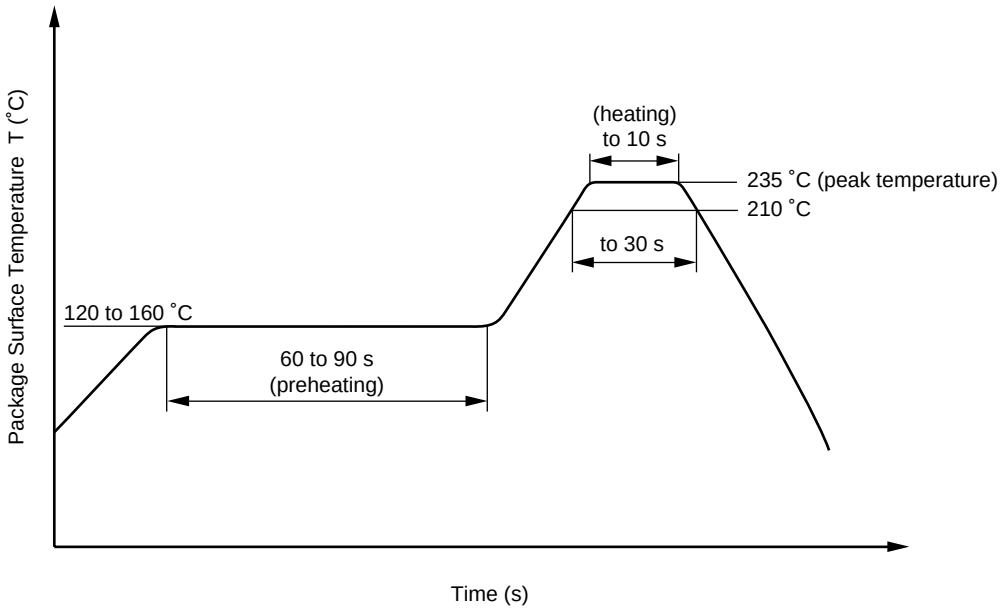

(2) Dip soldering

- Temperature 260 °C or below (molten solder temperature)
- Time 10 seconds or less
- Number of times One
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

(3) Cautions

- Fluxes

  Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

[MEMO]

[MEMO]

[MEMO]

CAUTION

Within this device there exists GaAs (Gallium Arsenide) material which is a harmful substance if ingested. Please do not under any circumstances break the hermetic seal.

NEPOC is a trademark of NEC Corporation.

- **The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.**
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
- NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
- Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.
- While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
- NEC devices are classified into the following three quality grades:
  "Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.
  - Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
  - Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
  - Specific: Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

  The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.