

1. Description

1.1. Project

Project Name	STM32F407-OS
Board Name	STM32F407G-DISC1
Generated with:	STM32CubeMX 6.12.1
Date	10/27/2024


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VGTx
MCU Package	LQFP100
MCU Pin number	100

1.3. Core(s) information

Core(s)	Arm Cortex-M4	

2. Pinout Configuration

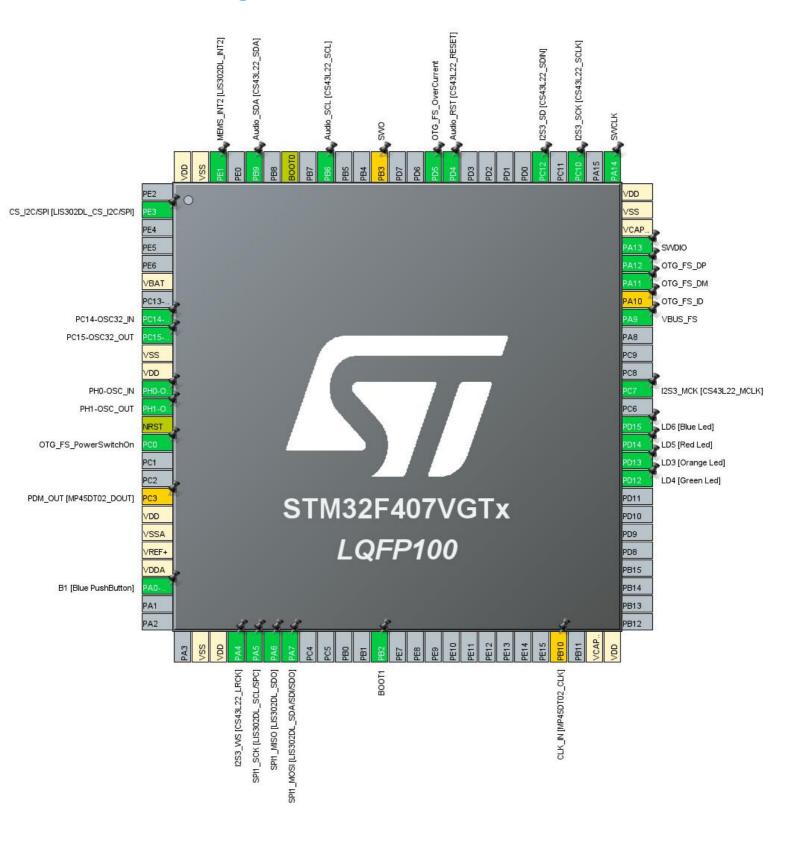

3. Pins Configuration


Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [LIS302DL_CS_I2C/SPI]
6	VBAT	Power		
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
15	PC0 *	I/O	GPIO_Output	OTG_FS_PowerSwitchOn
18	PC3 **	I/O	I2S2_SD	PDM_OUT
				[MP45DT02_DOUT]
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	GPIO_EXTI0	B1 [Blue PushButton]
27	VSS	Power		
28	VDD	Power		
29	PA4	I/O	12S3_WS	12S3_WS [CS43L22_LRCK]
30	PA5	I/O	SPI1_SCK	SPI1_SCK [LIS302DL_SCL/SPC]
31	PA6	I/O	SPI1_MISO	SPI1_MISO [LIS302DL_SDO]
32	PA7	I/O	SPI1_MOSI	SPI1_MOSI [LIS302DL_SDA/SDI/SDO]
37	PB2 *	I/O	GPIO_Input	BOOT1
47	PB10 **	I/O	I2S2_CK	CLK_IN [MP45DT02_CLK]
49	VCAP_1	Power		
50	VDD	Power		
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14 *	I/O	GPIO_Output	LD5 [Red Led]
62	PD15 *	I/O	GPIO_Output	LD6 [Blue Led]
64	PC7	I/O	I2S3_MCK	12S3_MCK [CS43L22_MCLK]

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
68	PA9	I/O	USB_OTG_FS_VBUS	VBUS_FS
69	PA10 **	I/O	USB_OTG_FS_ID	OTG_FS_ID
70	PA11	I/O	USB_OTG_FS_DM	OTG_FS_DM
71	PA12	I/O	USB_OTG_FS_DP	OTG_FS_DP
72	PA13	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
78	PC10	I/O	12S3_CK	I2S3_SCK [CS43L22_SCLK]
80	PC12	I/O	I2S3_SD	I2S3_SD [CS43L22_SDIN]
85	PD4 *	I/O	GPIO_Output	Audio_RST [CS43L22_RESET]
86	PD5 *	I/O	GPIO_Input	OTG_FS_OverCurrent
89	PB3 **	I/O	SYS_JTDO-SWO	SWO
92	PB6	I/O	I2C1_SCL	Audio_SCL [CS43L22_SCL]
94	воото	Boot		
96	PB9	I/O	I2C1_SDA	Audio_SDA [CS43L22_SDA]
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [LIS302DL_INT2]
99	VSS	Power		
100	VDD	Power		

^{*} The pin is affected with an I/O function

^{**} The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

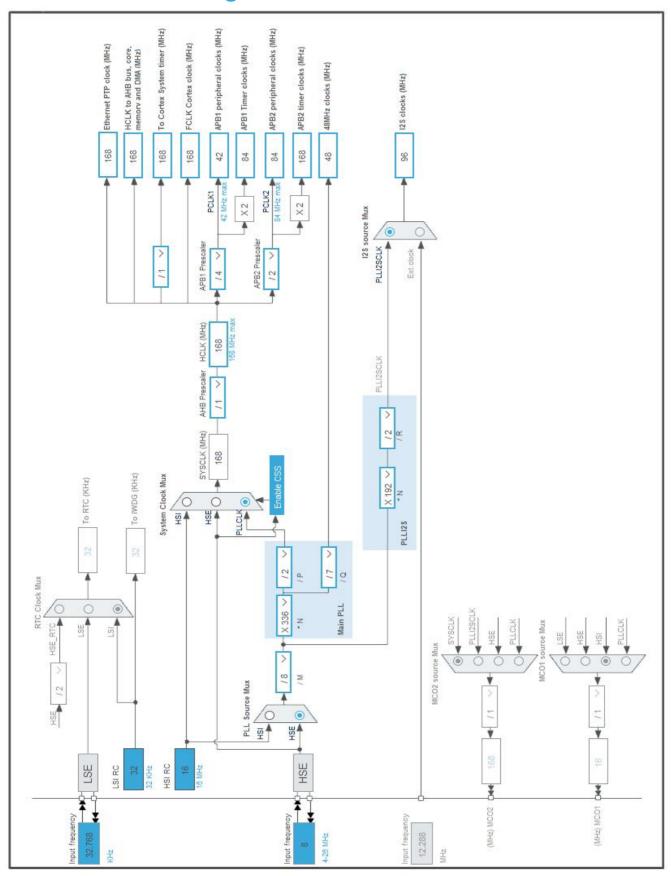

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VGTx
Datasheet	DS8626_Rev8

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

O4am	Ctand	Ct a = 0
Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	168 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	46 mA	280 μΑ
Duration	0.1 ms	0.9 ms
DMIPS	210.0	0.0
Та Мах	98.47	104.96
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	4.85 mA
Battery Life	29 days, 4 hours	Average DMIPS	210.0 DMIPS

1.6. Chart

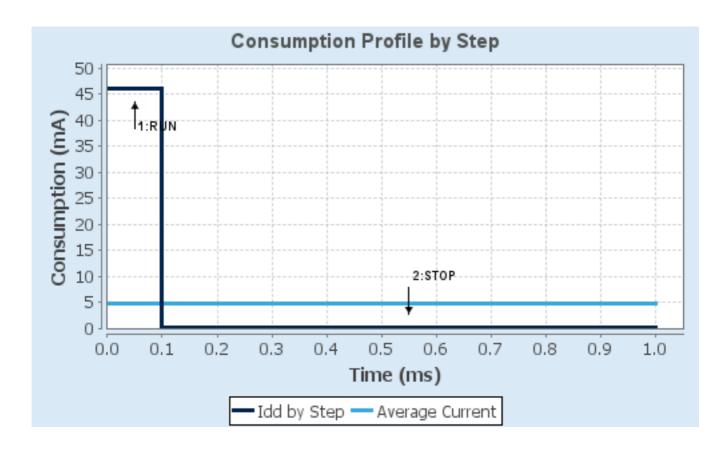

2. Software Project

2.1. Project Settings

Name	Value
Project Name	STM32F407-OS
Project Folder	C:\Users\jacco\OneDrive\Desktop\EdgeAl\GestureRecognition\STM32F407-OS
Toolchain / IDE	STM32CubelDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.28.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Add necessary library files as reference in the toolchain project configuration file
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power	No
consumption)	
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name		
1	SystemClock_Config	RCC		
2	MX_GPIO_Init	GPIO		
3	MX_I2C1_Init	I2C1		
4	MX_I2S3_Init	12\$3		
5	MX_SPI1_Init	SPI1		
6	MX_USB_HOST_Init	USB_HOST		

3. Peripherals and Middlewares Configuration

3.1. I2C1 I2C: I2C

3.1.1. Parameter Settings:

Master Features:

I2C Speed Mode Standard Mode

I2C Clock Speed (Hz) 100000

Slave Features:

Clock No Stretch Mode Disabled
Primary Address Length selection 7-bit
Dual Address Acknowledged Disabled
Primary slave address 0

General Call address detection Disabled

3.2. I2S3

Mode: Half-Duplex Master mode: Master Clock Output 3.2.1. Parameter Settings:

Generic Parameters:

Transmission Mode Mode Master Transmit

Communication Standard I2S Philips

Data and Frame Format 16 Bits Data on 16 Bits Frame

Selected Audio Frequency 96 KHz *

Real Audio Frequency 93.75 KHz *

Error between Selected and Real -2.34 % *

Clock Parameters:

Clock Source I2S PLL Clock

Clock Polarity Low

3.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator Low Speed Clock (LSE): Crystal/Ceramic Resonator

3.3.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Instruction Cache Enabled
Prefetch Buffer Enabled
Data Cache Enabled

Flash Latency(WS) 5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value 16
HSE Startup Timout Value (ms) 100
LSE Startup Timout Value (ms) 5000

Power Parameters:

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

3.4. SPI1

Mode: Full-Duplex Master

3.4.1. Parameter Settings:

Basic Parameters:

Frame Format Motorola
Data Size 8 Bits
First Bit MSB First

Clock Parameters:

Prescaler (for Baud Rate) 2

Baud Rate 42.0 MBits/s *

Clock Polarity (CPOL) Low
Clock Phase (CPHA) 1 Edge

Advanced Parameters:

CRC Calculation Disabled
NSS Signal Type Software

3.5. SYS

Debug: Serial Wire

Timebase Source: SysTick

3.6. USB_OTG_FS

Mode: Host_Only

mode: Activate_VBUS
3.6.1. Parameter Settings:

Speed Host Full Speed 12MBit/s

Signal start of frame Disabled

3.7. FREERTOS

Interface: CMSIS_V2

3.7.1. Config parameters:

API:

FreeRTOS API CMSIS v2

Versions:

FreeRTOS version 10.3.1 CMSIS-RTOS version 2.00

MPU/FPU:

ENABLE_MPU Disabled ENABLE_FPU Disabled

Kernel settings:

USE_TICKLESS_IDLE

USE_TASK_NOTIFICATIONS
RECORD_STACK_HIGH_ADDRESS

USE_PREEMPTION Enabled

CPU_CLOCK_HZ SystemCoreClock

TICK_RATE_HZ 1000 MAX_PRIORITIES 56 MINIMAL_STACK_SIZE 128 16 MAX_TASK_NAME_LEN USE_16_BIT_TICKS Disabled IDLE_SHOULD_YIELD Enabled USE_MUTEXES Enabled USE_RECURSIVE_MUTEXES Enabled USE_COUNTING_SEMAPHORES Enabled 8 QUEUE_REGISTRY_SIZE USE_APPLICATION_TASK_TAG Disabled Enabled ENABLE_BACKWARD_COMPATIBILITY USE_PORT_OPTIMISED_TASK_SELECTION Disabled

Disabled Enabled

Disabled

Memory management settings:

Memory Allocation Dynamic / Static

TOTAL_HEAP_SIZE 15360

Memory Management scheme heap_4

Hook function related definitions:

USE_IDLE_HOOK Disabled

USE_TICK_HOOK Disabled

USE_MALLOC_FAILED_HOOK Disabled

USE_DAEMON_TASK_STARTUP_HOOK Disabled

CHECK_FOR_STACK_OVERFLOW Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS Disabled
USE_TRACE_FACILITY Enabled
USE_STATS_FORMATTING_FUNCTIONS Disabled

Co-routine related definitions:

USE_CO_ROUTINES Disabled
MAX_CO_ROUTINE_PRIORITIES 2

Software timer definitions:

USE_TIMERS Enabled
TIMER_TASK_PRIORITY 2
TIMER_QUEUE_LENGTH 10
TIMER_TASK_STACK_DEPTH 256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY 15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY 5

Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE size_t
USE_POSIX_ERRNO Disabled

CMSIS-RTOS V2 flags:

USE_OS2_THREAD_SUSPEND_RESUME Enabled
USE_OS2_THREAD_ENUMERATE Enabled
USE_OS2_EVENTFLAGS_FROM_ISR Enabled
USE_OS2_THREAD_FLAGS Enabled
USE_OS2_TIMER Enabled
USE_OS2_MUTEX Enabled

3.7.2. Include parameters:

Include definitions:

vTaskPrioritySet Enabled uxTaskPriorityGet Enabled

vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Enabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Enabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Enabled
xTaskGetCurrentTaskHandle	Enabled
eTaskGetState	Enabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Enabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled
uxTaskGetStackHighWaterMark2	Disabled

3.7.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT Disable

Project settings (see parameter description first):

Use FW pack heap file Enabled

3.8. USB_HOST

Class for FS IP: Communication Host Class (Virtual Port Com)

3.8.1. Parameter Settings:

NO_SW_VBUS_DRIVE_FS	false
Host Configuration:	
USBH_MAX_NUM_ENDPOINTS (Maximum number of endpoints)	2
USBH_MAX_NUM_INTERFACES (Maximun number of interfaces)	2
USBH_MAX_NUM_SUPPORTED_CLASS (Maximun number of supported class)	1
USBH_MAX_NUM_CONFIGURATION (Maximun number of supported configuration)	1
USBH_KEEP_CFG_DESCRIPTOR (Keep the configuration into RAM)	Enabled
USBH_MAX_SIZE_CONFIGURATION (Maximun size in bytes for the Configuration Descriptor)	256
USBH_MAX_DATA_BUFFER (Maximun size of temporary data)	512
USBH_DEBUG_LEVEL (USBH Debug Level)	0: No debug message

Enabled

CMSIS_RTOS:

USBH_USE_OS (Enable the support of an RTOS)

USBH_PROCESS_PRIO (The CMSIS-RTOS osPriority value specifies the priority for the USB priority: normal (default)

Host thread)

USBH_PROCESS_STACK_SIZE (The CMSIS-RTOS stack size requirements in words) 128

3.8.2. Platform Settings:

Drive_VBUS_FS PC0

* User modified value

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up *	Low	Audio_SCL [CS43L22_SCL]
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up *	Low	Audio_SDA [CS43L22_SDA]
12S3	PA4	12S3_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_WS [CS43L22_LRCK]
	PC7	I2S3_MCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_MCK [CS43L22_MCLK]
	PC10	I2S3_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SCK [CS43L22_SCLK]
	PC12	12S3_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	12S3_SD [CS43L22_SDIN]
RCC	PC14- OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15- OSC32_OU T	RCC_OSC32_O UT	n/a	n/a	n/a	PC15-OSC32_OUT
	PH0- OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1- OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_SCK [LIS302DL_SCL/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_MISO [LIS302DL_SDO]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_MOSI [LIS302DL_SDA/SDI/SDO]
SYS	PA13	SYS_JTMS- SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK- SWCLK	n/a	n/a	n/a	SWCLK
USB_OTG_ FS	PA9	USB_OTG_FS_ VBUS	Input mode	No pull-up and no pull-down	n/a	VBUS_FS
	PA11	USB_OTG_FS_ DM	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_DM
	PA12	USB_OTG_FS_ DP	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_DP
Single Mapped	PC3	I2S2_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	PDM_OUT [MP45DT02_DOUT]
Signals	PB10	12S2_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	CLK_IN [MP45DT02_CLK]
	PA10	USB_OTG_FS_I	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_ID

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
		D				
	PB3	SYS_JTDO- SWO	n/a	n/a	n/a	SWO
GPIO	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CS_I2C/SPI [LIS302DL_CS_I2C/SPI]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OTG_FS_PowerSwitchOn
	PA0-WKUP	GPIO_EXTI0	External Event Mode	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
			with Rising edge			
			trigger detection *			
	PB2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	BOOT1
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5 [Red Led]
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6 [Blue Led]
	PD4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Audio_RST [CS43L22_RESET]
	PD5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	OTG_FS_OverCurrent
	PE1	GPIO_EXTI1	External Event Mode with Rising edge trigger detection *	No pull-up and no pull-down	n/a	MEMS_INT2 [LIS302DL_INT2]

4.2. DMA configuration

nothing configured in DMA service

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority	
Non maskable interrupt	true	0	0	
Hard fault interrupt	true	0	0	
Memory management fault	true	0	0	
Pre-fetch fault, memory access fault	true	0	0	
Undefined instruction or illegal state	true	0	0	
System service call via SWI instruction	true	0	0	
Debug monitor	true	0	0	
Pendable request for system service	true	15	0	
System tick timer	true	15	0	
USB On The Go FS global interrupt	true	5	0	
PVD interrupt through EXTI line 16	unused			
Flash global interrupt	unused			
RCC global interrupt	unused			
I2C1 event interrupt	unused			
I2C1 error interrupt	unused			
SPI1 global interrupt		unused		
SPI3 global interrupt		unused		
FPU global interrupt	unused			

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	false	false
Debug monitor	false	true	false
Pendable request for system service	false	false	false
System tick timer	false	true	true
USB On The Go FS global interrupt	false	true	true

* User modified value

5. System Views

5.1. Category view

5.1.1. Current



6. Docs & Resources

Type Link

BSDL files https://www.st.com/resource/en/bsdl_model/stm32f405-415_407-

417_bsdl.zip

IBIS models https://www.st.com/resource/en/ibis_model/stm32f405-415_407-

417_ibis.zip

System View https://www.st.com/resource/en/svd/stm32f4-svd.zip

Description

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_embedded_software_solutions.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_eval-

tools_portfolio.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_stm8_functi

onal-safety-packages.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_software_development_tools.pdf

Presentations https://www.st.com/resource/en/product_presentation/microcontrollers-

stm32-family-overview.pdf

Presentations https://www.st.com/resource/en/product_presentation/microcontrollers-

stm32h7rs-lines-overview.pdf

Brochures https://www.st.com/resource/en/brochure/products-and-solutions-for-plcs-

and-smart-i-os.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32nucleo.pdf

Flyers https://www.st.com/resource/en/flyer/flstmcsuite.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32trust.pdf

Product https://www.st.com/resource/en/certification_document/stm32_authenticat

Certifications ion_can.pdf

Application Notes https://www.st.com/resource/en/application_note/an1709-emc-design-

guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-stm32-

microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an2639-solderingrecommendations-and-package-information-for-leadfree-ecopack-mcusand-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3154-can-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3371-using-the-hardware-realtime-clock-rtc-in-stm32-f0-f2-f3-f4-and-l1-series-of-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4031-using-the-stm32f2-stm32f4-and-stm32f7-series-dma-controller-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4073-how-to-improve-adc-accuracy-when-using-stm32f2xx-and-stm32f4xx-microcontrollers-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4076-two-or-three-shunt-resistor-based-current-sensing-circuit-design-in-3phase-inverters-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4229-how-to-implement-a-vocoder-solution-using-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4488-getting-started-with-stm32f4xxxx-mcu-hardware-development-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4547-migrating-from-stm32f407xx417xx-to-stm32f427xx429xx437xx439xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4566-extending-the-dac-performance-of-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4640-peripherals-interconnections-on-stm32f4057xx-stm32f4157xx-stm32f42xxx-stm32f43xxx-stm32f446xx-and-stm32f469479xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4821-migrating-from-

- stm32f405415-line-and-stm32f407417-line-to-stm32l4-series-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4850-stm32-mcusspreadspectrum-clock-generation-principles-properties-andimplementation-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4995-using-anelectromyogram-technique-to-detect-muscle-activitystmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5020-digital-camera-interface-dcmi-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32microcontroller-gpio-hardware-settings-and-lowpower-consumptionstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2834-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-

- oversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcusmpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4908-getting-startedwith-usart-automatic-baud-rater-detection-for-stm32-mcusstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an1202_freertos_guidefor related Tools freertos-guide-stmicroelectronics.pdf & Software
- Application Notes https://www.st.com/resource/en/application_note/an1602_semihosting_in for related Tools __truestudio-how-to-do-semihosting-in-truestudio-stmicroelectronics.pdf & Software
- Application Notes https://www.st.com/resource/en/application_note/an1801_stm32cubeprog for related Tools rammer_in_truestudio-installing-stm32cubeprogrammer-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/atollic_editing_keyboard

for related Tools _shortcuts-atollic-editing-keyboard-shortcuts-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/iar_to_atollic_truestudio

for related Tools __migration_guide-truestudio-for-arm-migration-guide-iar-embedded-

& Software workbench-to-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/stm32cubemx_installatio

for related Tools n_in_truestudio-stm32cubemx-installation-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2656-stm32f10xxx-

for related Tools Icd-glass-driver-firmware-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2790-tft-lcd-

for related Tools interfacing-with-the-highdensity-stm32f10xxx-fsmc-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3078-stm32-

for related Tools inapplication-programming-over-the-ic-bus-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3116-stm32s-adc-

for related Tools modes-and-their-applications-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3174-implementing-

for related Tools receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application note/an3241-gvga-tftlcd-

for related Tools direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3307-guidelines-for-

for related Tools obtaining-iec-60335-class-b-certification-for-any-stm32-application-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-

for related Tools compatibility-guidelines-for-stm32-microcontroller-applications-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3965-

for related Tools stm32f40xstm32f41x-inapplication-programming-using-the-usart-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3966-lwip-tcpip-stack-

for related Tools demonstration-for-stm32f4x7-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3968-

for related Tools stm32f407stm32f417-inapplication-programming-iap-over-ethernet-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3969-eeprom-

for related Tools emulation-in-stm32f40xstm32f41x-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3988-clock-for related Tools configuration-tool-for-stm32f40xx41xx427x437x-microcontrollers-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3990-upgrading-

for related Tools stm32f4discovery-board-firmware-using-a-usb-key-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-

for related Tools and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-for related Tools software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4044-floating-point-for related Tools unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4323-getting-started-for related Tools with-stemwin-library-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4365-using-stm32f4-for related Tools mcu-power-modes-with-best-dynamic-efficiency-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4435-guidelines-for-

for related Tools obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-

& Software application-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4457-implementing-for related Tools an-emulated-uart-on-stm32f4-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4499-stm32--

for related Tools nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-

for related Tools inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4666-parallel-

for related Tools synchronous-transmission-using-gpio-and-dma-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4678-full-duplex-spi-

for related Tools emulation-for-stm32f4-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4701-proprietary-

for related Tools code-readout-protection-on-microcontrollers-of-the-stm32f4-series-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-

for related Tools firmware-examples-for-stm32f4-series-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4758-proprietary-

for related Tools code-readout-protection-on-stm32l4-stm32l4-stm32g4-and-stm32wb-

& Software series-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-

for related Tools processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application note/an4968-proprietary-

for related Tools code-read-out-protection-pcrop-on-stm32f72xxx-and-stm32f73xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5056-integration-

for related Tools guide-for-the-xcubesbsfu-stm32cube-expansion-package-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-

for related Tools with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5361-getting-started-

for related Tools with-projects-based-on-dualcore-stm32h7-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5394-getting-started-

for related Tools with-projects-based-on-the-stm32l5-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5418-how-to-build-a-for related Tools simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5426-migrating-

for related Tools graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software 550-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5464-position-control-

for related Tools of-a-threephase-permanent-magnet-motor-using-xcubemcsdk-or-

& Software xcubemcsdkful-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5564-getting-started-

for related Tools with-projects-based-on-dualcore-stm32wl-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5698-adapting-the-for related Tools xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-

& Software other-safety-standards-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application note/an5731-stm32cubemx-

for related Tools and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-

for related Tools smbuspmbus-expansion-package-for-stm32cube-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5952-how-to-use-

for related Tools cmake-in-stm32cubeide-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5054-how-to-perform-for related Tools secure-programming-using-stm32cubeprogrammer-stmicroelectronics.pdf

& Software

Errata Sheets https://www.st.com/resource/en/errata_sheet/es0182-stm32f405407xx-

and-stm32f415417xx-device-errata-stmicroelectronics.pdf

Datasheet https://www.st.com/resource/en/datasheet/dm00037051.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0214-stm32-Manuals cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf

Reference https://www.st.com/resource/en/reference_manual/rm0090-

Manuals stm32f405415-stm32f407417-stm32f427437-and-stm32f429439-

advanced-armbased-32bit-mcus-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-

& Articles stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-

foc-sdk-v40-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1163-description-of-

& Articles wlcsp-for-microcontrollers-and-recommendations-for-its-use-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-

& Articles shipping-media-for-stm32-microcontrollers-in-bga-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-

packages-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1433-reference-device-

& Articles marking-schematics-for-stm32-microcontrollers-and-microprocessors-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-& Articles

tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-

stmicroelectronics.pdf