

Lecture 4 - Batteries

Lecture summary

- Electrochemistry fundamentals
- Battery history and overview
- Battery definitions
- Improving capacity
- Essential materials properties
 - types of electrode behaviour
- Effect of charging rate on capacity
- Galvanostatic measurements

Essential electrochemistry

Quantities

Throughout this course, we will see a number of electronics/electrochemistry terms, summarised here:

Term	Symbol	Description	Units
Potential (or voltage)	E or V	the 'push' moving the electrons	Volts (V)
Current	I	the rate at which electrons move	Amperes (A)
Charge	Q	amount of electrons	Coloumbs (C) or Amp-hours (Ah, 1 mAh = 3.6 C)
Resistance	R	effects reducing the current	Ohms (Ω)
Capacitance	C	ability to store charge	Farads (F)
Power	P	how much current, and with what force	Watts (W)

Important relationships

Ohm's law - current and potential are linked:

$$V = IR$$

(Ohm's law) A current flowing for a period of time gives an overall charge:

$$Q = It$$

Power is a combination of current and voltage:

$$P = IV$$

Resistivity (ρ) and conductivity (σ) are inversely related. Note that resistance (R) is related to resistivity (ρ) by accounting for the geometry of the object.

$$\rho = \frac{1}{\sigma}$$

Why batteries?

- Portable electronics
- Electric vehicles
- Grid-storage (e.g. from renewables)
- ...


Future batteries require more charge stored in a smaller volume and/or mass.

This requires *new materials* from chemistry.




(Brief) Battery History

- **ca. 190 AD:** Baghdad (or Parthian) battery
 - Iron and copper electrodes, filled with vinegar

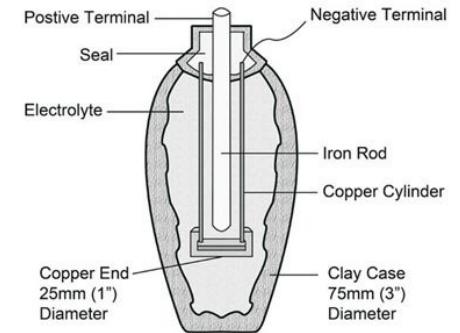


(Brief) Battery History

- **ca. 190 AD:** Baghdad (or Parthian) battery
 - Iron and copper electrodes, filled with vinegar
- **1800:** Volta created the voltaic pile
 - Alternating Ag and Zn discs, NaCl electrolyte
 - Enabled *chemistry* e.g. $2 \text{H}_2\text{O} \rightarrow \text{H}_2 + \text{O}_2$

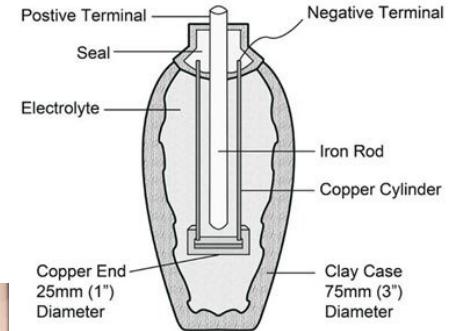

(Brief) Battery History

- **ca. 190 AD:** Baghdad (or Parthian) battery
 - Iron and copper electrodes, filled with vinegar
- **1800:** Volta created the voltaic pile
 - Alternating Ag and Zn discs, NaCl electrolyte
 - Enabled *chemistry* e.g. $2 \text{H}_2\text{O} \rightarrow \text{H}_2 + \text{O}_2$
- **1836:** Daniell cell:
 $\text{Zn}|\text{Zn}^{2+}, \text{SO}_4^{2-}||\text{SO}_4^{2-}|\text{Cu}^{2+}|\text{Cu}$
 - First practical electricity source (used to power telegraphs)
- **1859** Lead-acid battery (first rechargeable)

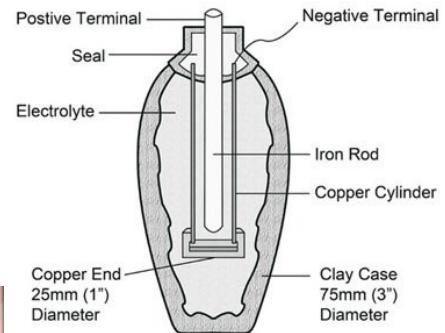

(Brief) Battery History

- **ca. 190 AD:** Baghdad (or Parthian) battery

- Iron and copper electrodes, filled with vinegar

- **1800:** Volta created the voltaic pile

- Alternating Ag and Zn discs, NaCl electrolyte

- Enabled *chemistry* e.g. $2 \text{H}_2\text{O} \rightarrow \text{H}_2 + \text{O}_2$

- **1836:** Daniell cell:



- First practical electricity source (used to power telegraphs)



- **1859** Lead-acid battery (first rechargeable)

- **1886** The first dry cell:




- NH_4Cl immobilised with plaster of Paris ($\text{CaSO}_4 \cdot 0.5\text{H}_2\text{O}$)

- **1899** The first alkaline battery: $\text{NiO(OH)}|\text{KOH}|\text{Cd}$

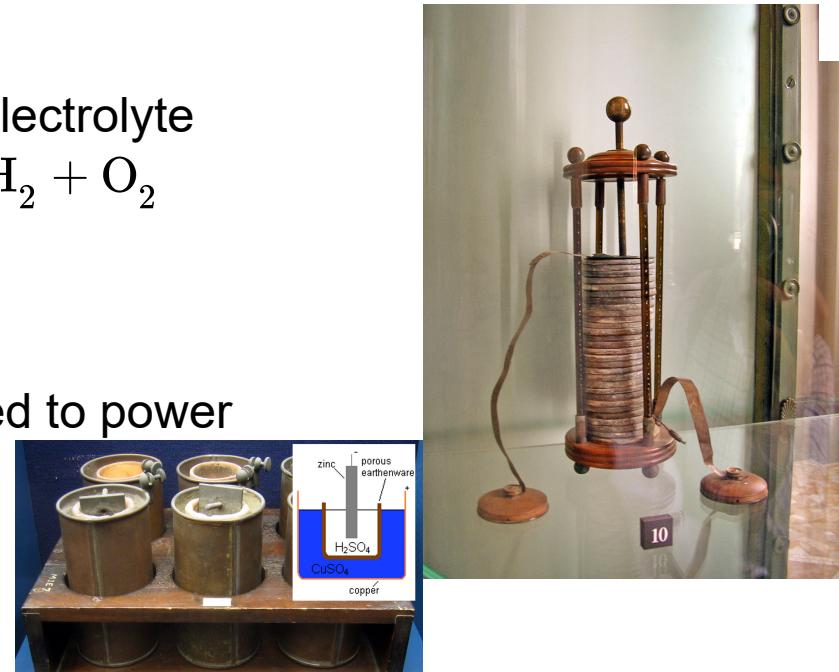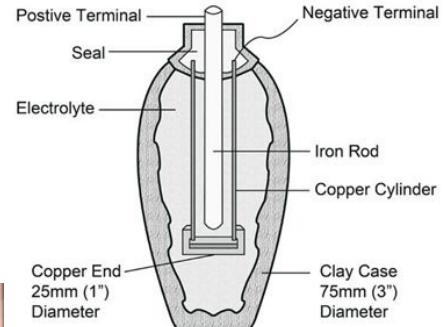

(Brief) Battery History

- **ca. 190 AD:** Baghdad (or Parthian) battery
 - Iron and copper electrodes, filled with vinegar

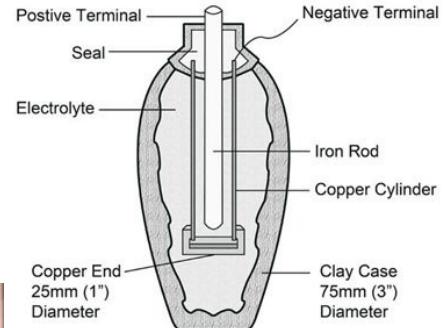

- **1800:** Volta created the voltaic pile
 - Alternating Ag and Zn discs, NaCl electrolyte
 - Enabled *chemistry* e.g. $2 \text{H}_2\text{O} \rightarrow \text{H}_2 + \text{O}_2$

- **1836:** Daniell cell:




- First practical electricity source (used to power telegraphs)

- **1859** Lead-acid battery (first rechargeable)

- **1886** The first dry cell:




- NH_4Cl immobilised with plaster of Paris ($\text{CaSO}_4 \cdot 0.5\text{H}_2\text{O}$)
- **1899** The first alkaline battery: $\text{NiO(OH)}|\text{KOH}|\text{Cd}$
- **1991** Li-ion battery commercialised by Sony

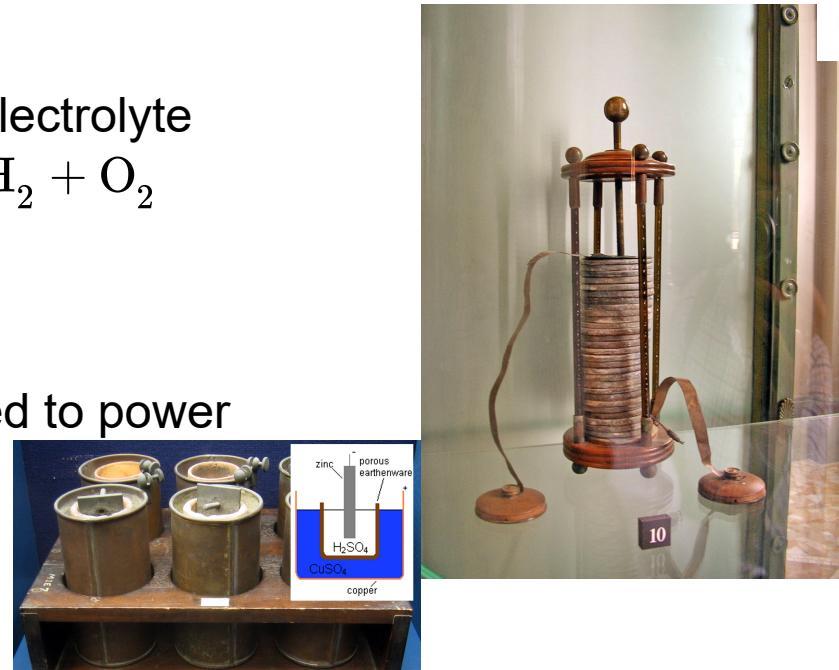

Chemistry Nobel prize 2019

Awarded for contributions to the development of the Li-ion battery.

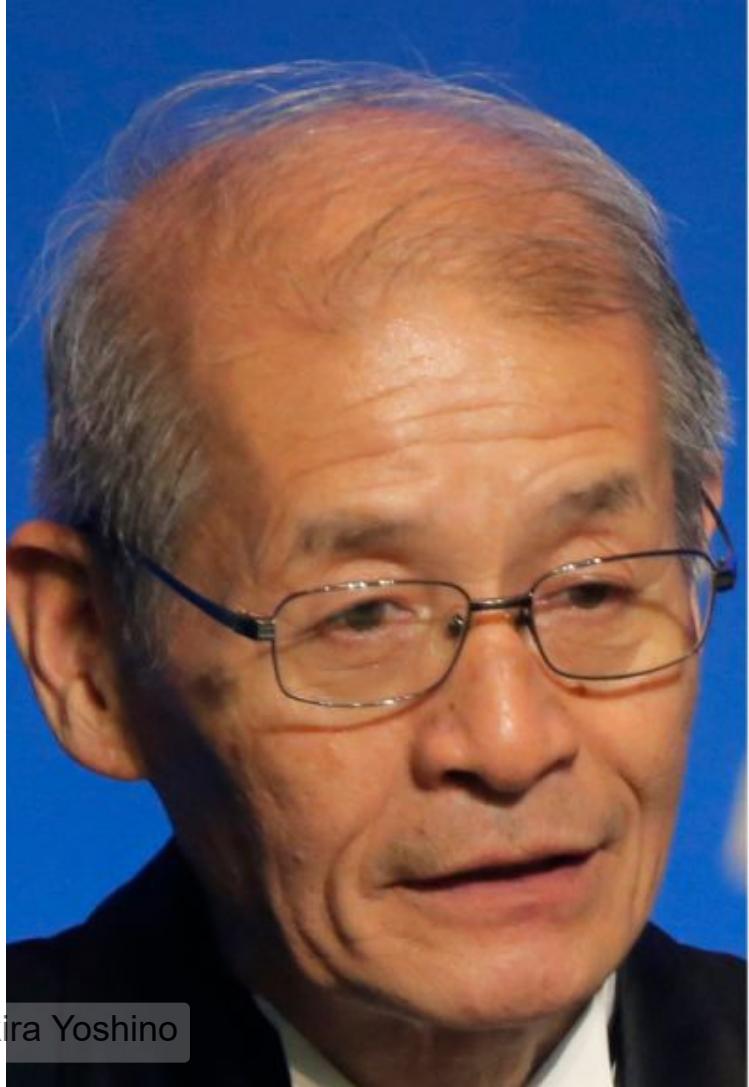

Akira Yoshino




John B. Goodenough




M. Stanley Whittingham

Definitions

Charge

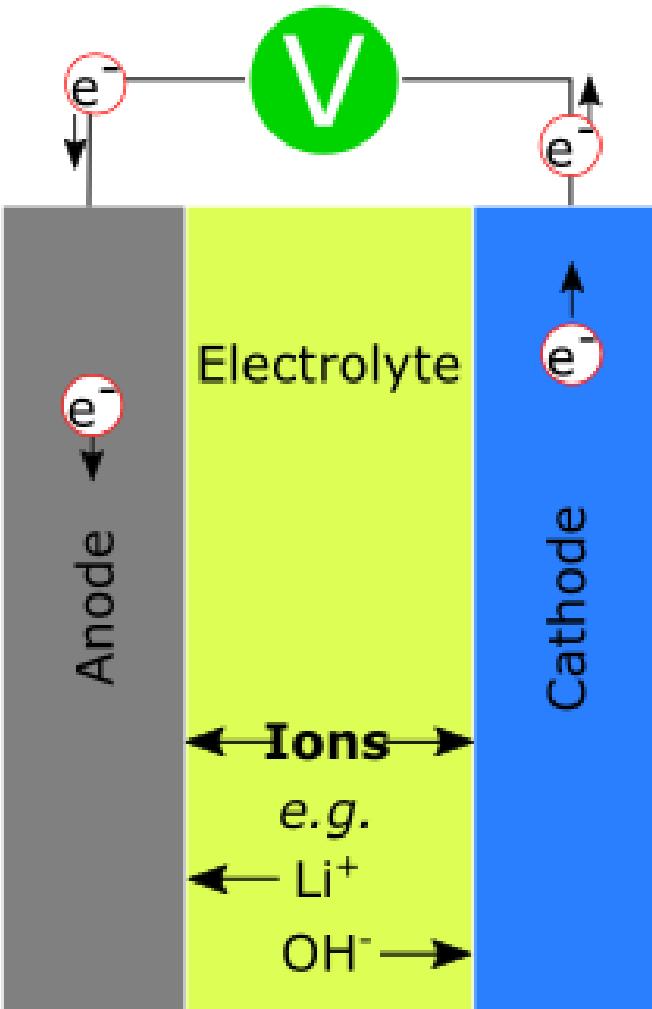

Discharge

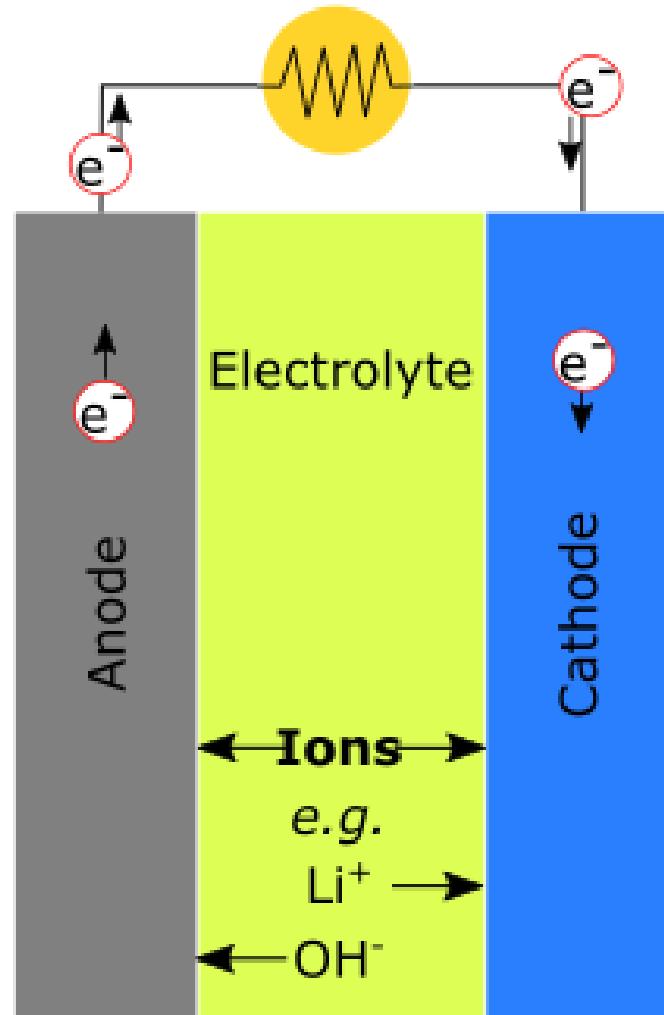

Main approaches

Cationic battery

Charge carried across electrolyte by cations

- Li^+ , Na^+ ...
- Mg^{2+} , Ca^{2+} , ...
- Even Zn^{2+} , Al^{3+}

Anionic battery

Anion charge carrier in electrolyte

- OH^- (NiCd or NiMH)
- F^- , Cl^-
- HSO_4^- (in Pb-acid)



What makes a 'good' battery?

Perhaps the most important parameter in batteries is the total *energy capacity*, E_{bat}

- Combination of cell voltage (V) and amount of charge (Q) stored in the material:

$$E_{\text{bat}} = QV$$

Q is expressed in units of Ah, so E_{bat} is in Wh (Watt-hours)

What makes a 'good' battery?

Perhaps the most important parameter in batteries is the total *energy capacity*, E_{bat}

- Combination of cell voltage (V) and amount of charge (Q) stored in the material:

$$E_{\text{bat}} = QV$$

Q is expressed in units of Ah, so E_{bat} is in Wh (Watt-hours)


- E_{bat} is dependent on the amount of battery material. More useful are:

- Specific (gravimetric) energy (Wh g⁻¹).
 Q per unit mass (Ah g⁻¹)

- (Volumetric) energy density (Wh L⁻¹).
 Q per unit volume (Ah L⁻¹)


Improving batteries

Ideally, we want to maximise *both* volumetric and gravimetric energy densities

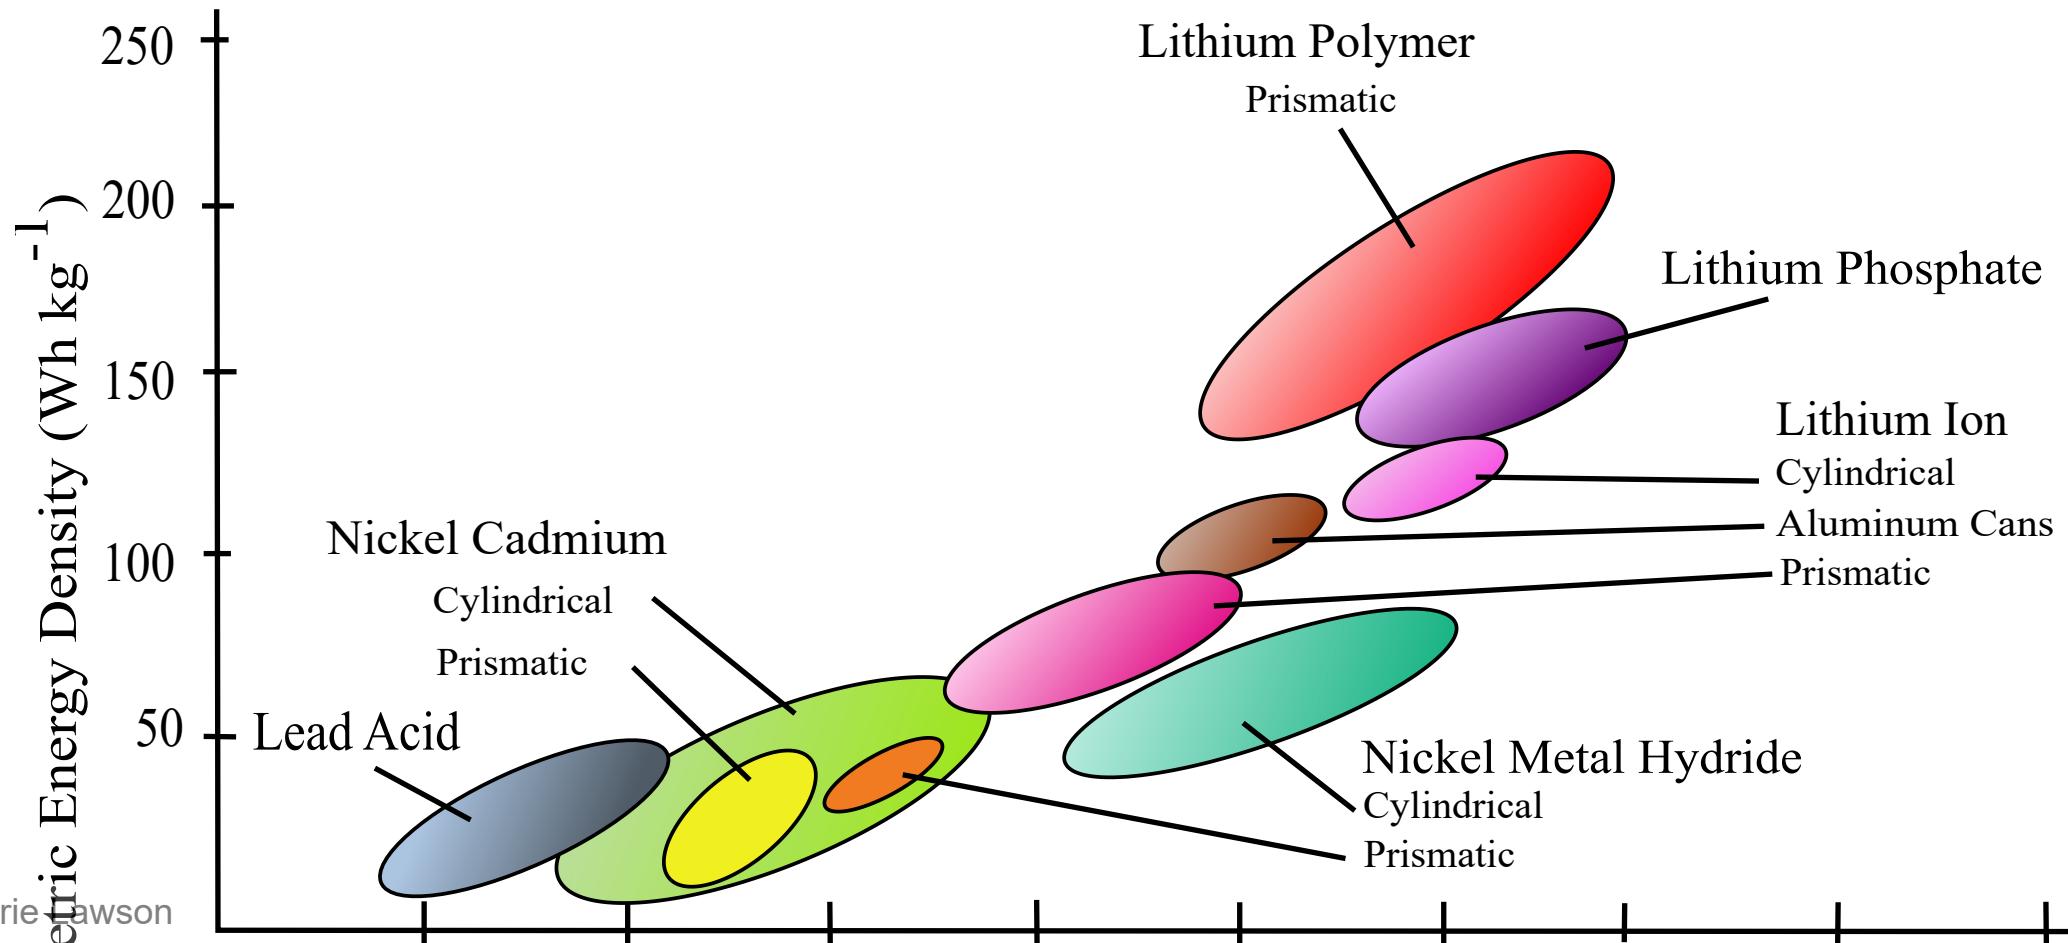

Approaches to increase E_{bat}

1. Increase *operating voltage*, V

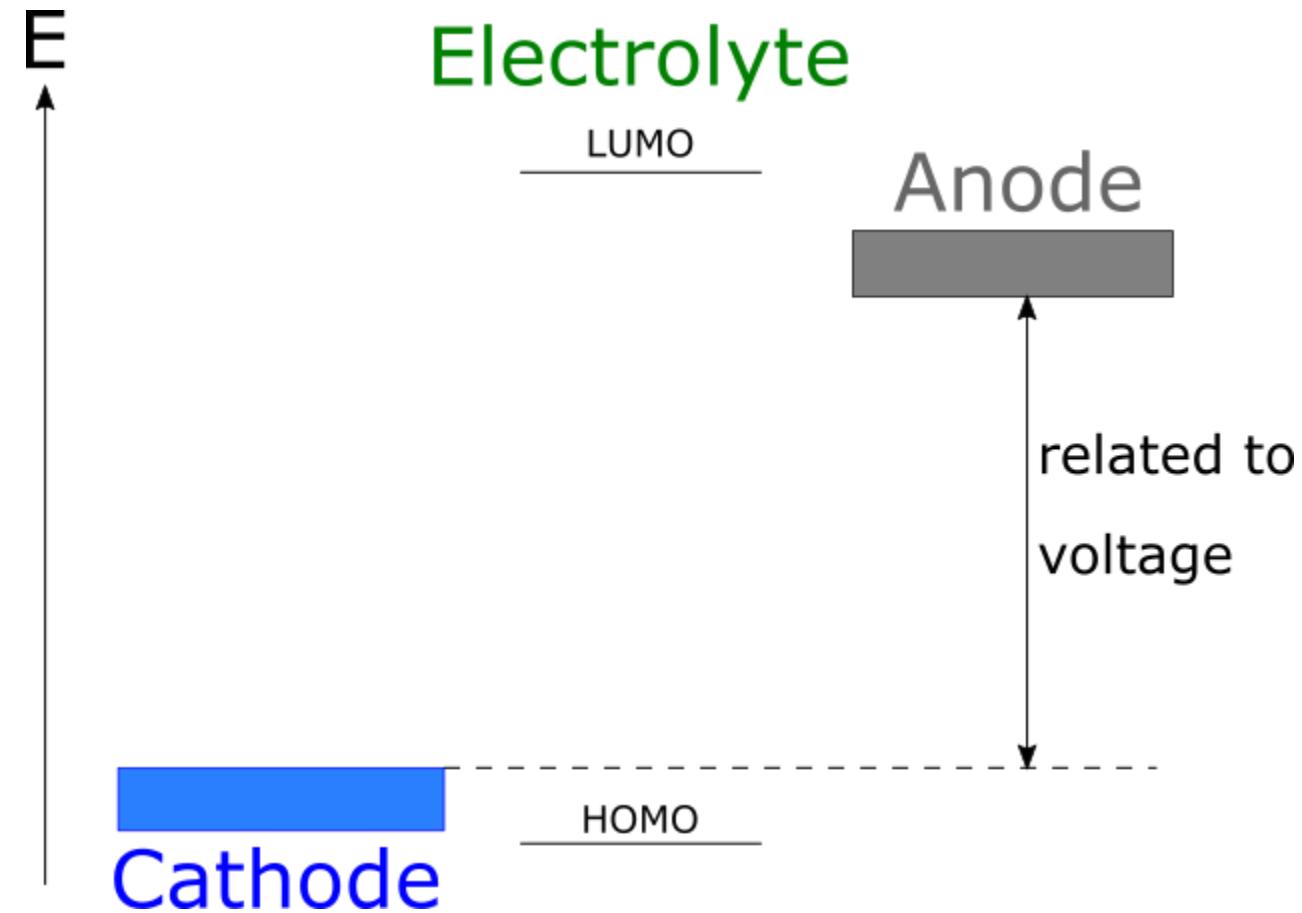

2. Increase charge stored, Q

The charge stored in a material can be calculated using Faraday's Law:

$$Q_{\text{theoretical}} = \frac{nF}{3.6M_w} \quad (\text{in mAh g}^{-1})$$

2. Increase charge stored, Q

The charge stored in a material can be calculated using Faraday's Law:

$$Q_{\text{theoretical}} = \frac{nF}{3.6M_w} \quad (\text{in mAh g}^{-1})$$

e.g. for the cathode $\text{LiCoO}_2 \rightarrow \text{Li}^+ + \text{e}^- + \text{CoO}_2$:

2. Increase charge stored, Q

The charge stored in a material can be calculated using Faraday's Law:

$$Q_{\text{theoretical}} = \frac{nF}{3.6M_w} \quad (\text{in mAh g}^{-1})$$

e.g. for the cathode $\text{LiCoO}_2 \rightarrow \text{Li}^+ + \text{e}^- + \text{CoO}_2$:

$$\begin{aligned} n &= 1, F = 96485.3 \text{ As mol}^{-1}, M_w = 97.873 \text{ g mol}^{-1} \\ \therefore Q &= 274 \text{ mAh g}^{-1} \end{aligned}$$

2. Increase charge stored, Q

The charge stored in a material can be calculated using Faraday's Law:

$$Q_{\text{theoretical}} = \frac{nF}{3.6M_w} \quad (\text{in mAh g}^{-1})$$

e.g. for the cathode $\text{LiCoO}_2 \rightarrow \text{Li}^+ + \text{e}^- + \text{CoO}_2$:

$$\begin{aligned} n &= 1, F = 96485.3 \text{ As mol}^{-1}, M_w = 97.873 \text{ g mol}^{-1} \\ \therefore Q &= 274 \text{ mAh g}^{-1} \end{aligned}$$

In reality, the charge stored is less than the theoretical maximum

- CoO_2 is unstable: $2 \text{Co}^{\text{IV}}\text{O}_2 \rightarrow \text{Co}_2^{\text{III}}\text{O}_3 + \frac{1}{2}\text{O}_2$
 - We can only safely reach $\text{Li}_{0.5}\text{CoO}_2$, so the useful capacity is 137 mAh g^{-1}

Which will give the highest energy capacity

Which of the following cathode combinations will give the highest E_{bat} ?

Reaction	Potential vs. Li/Li ⁺ (V)
$\text{LiCoPO}_4 \rightarrow \text{Li}^+ + \text{CoPO}_4 + \text{e}^-$	4.7
$\text{LiF} + \text{Ag}^0 \rightarrow \text{AgF} + \text{Li}^+ + \text{e}^-$	4.1
$\text{LiTiS}_2 \rightarrow \text{Li}^+ + \text{TiS}_2 + \text{e}^-$	2.0

Vote



Mentimeter

Which will give the largest energy capacity?

LiCoPO4 (4.7V)

Ag + LiF (4.1V)

LiTiS2 (2.0V)

Submit

Results

Go to www.menti.com and use the code **6440 3565**

[Open Menti.mote](#)



Ideal materials properties

Anode/Cathode	Electrolyte
High capacity for charge-carrying ion	High ionic conductivity
Large potential difference (cell voltage)	Low electronic conductivity
Good ionic and electronic conductor (ideally)	Stable in contact with electrodes

Ideal materials properties

Anode/Cathode	Electrolyte
High capacity for charge-carrying ion	High ionic conductivity
Large potential difference (cell voltage)	Low electronic conductivity
Good ionic and electronic conductor (ideally)	Stable in contact with electrodes


Electrode materials fall into two categories:

- Conversion
- Intercalation

Conversion electrodes

Electrochemical reaction proceeds during charge/discharge.


As a general equation,



Conversion electrodes


Electrochemical reaction proceeds during charge/discharge.

As a general equation,




Examples:


Chloride-ion battery cathodes:



Lithium-sulfur cathode (here, $a = 0$):



Metal hydride anode (used in NiMH):



Conversion electrodes (2)

Advantages

- Wide range of reactions possible
 - could avoid scarce/expensive elements by using e.g. Fe, Cu, O...
- Large theoretical capacities
 - More than one charge carrier per heavy metal (see BiCl_3 example)

Conversion electrodes (2)

Advantages

- Wide range of reactions possible
 - could avoid scarce/expensive elements by using e.g. Fe, Cu, O...
- Large theoretical capacities
 - More than one charge carrier per heavy metal (see BiCl_3 example)


Disadvantages

- Often low conductivity (ionic and/or electronic)
- Substantial volume changes during cycling
- Side reactions/dissolution of intermediate species

Intercalation electrodes

No chemical 'reaction'; mobile species is 'inserted' into a material able to accommodate its charge/size.




Example: Li_xCoO_2

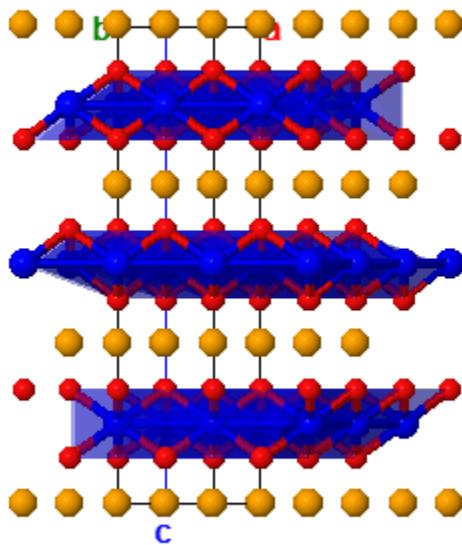

JSmol

- Close-packed hcp **oxygen** array
- **Co** occupies alternate layers of octahedral holes
- **Li^+** can insert between Co layers, reducing $\text{Co}^{\text{IV}} \rightleftharpoons \text{Co}^{\text{III}}$
 - Layer spacing varies with x
 - High Li^+ conductivity due to 2D vacancy-hopping mechanism

Intercalation cathode families


	2D conductor	3D conductor	1D conductor
Type	$\alpha\text{-NaFeO}_2$	spinel	olivine
Structure	 JSmol	 JSmol	 JSmol
Formula	LiCoO_2	LiMn_2O_4	LiFePO_4
$Q_{\text{theo.}} / \text{mAh g}^{-1}$	274	148	170

←-----< Better Li conduction <-----→
→-----> Safer >-----→
←-----< (Higher cost) <-----→

Electrochemical measurements


To avoid variations in rate, battery analysis uses *Galvanostatic* (constant current) electrochemistry

- measure the resulting potential.
- easier to separate chemistry effects from rate effects

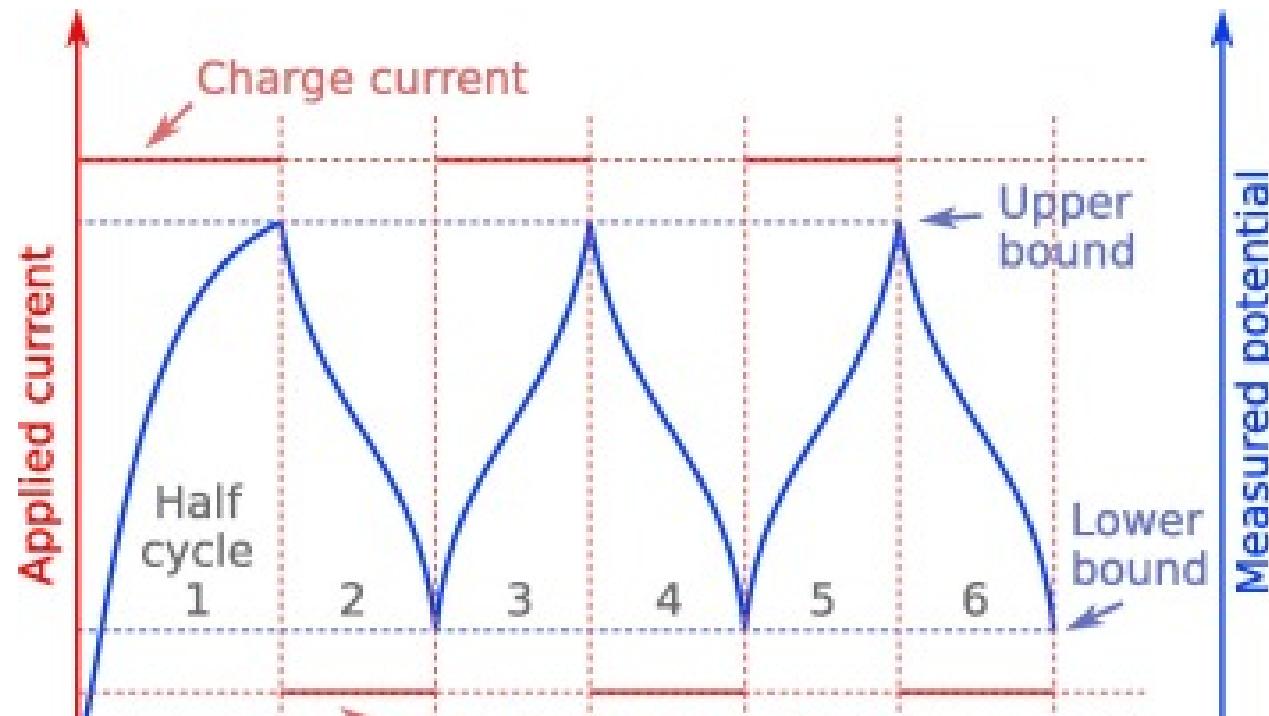



Electrochemical measurements (2)

e.g. for a 2.2 Ah battery:

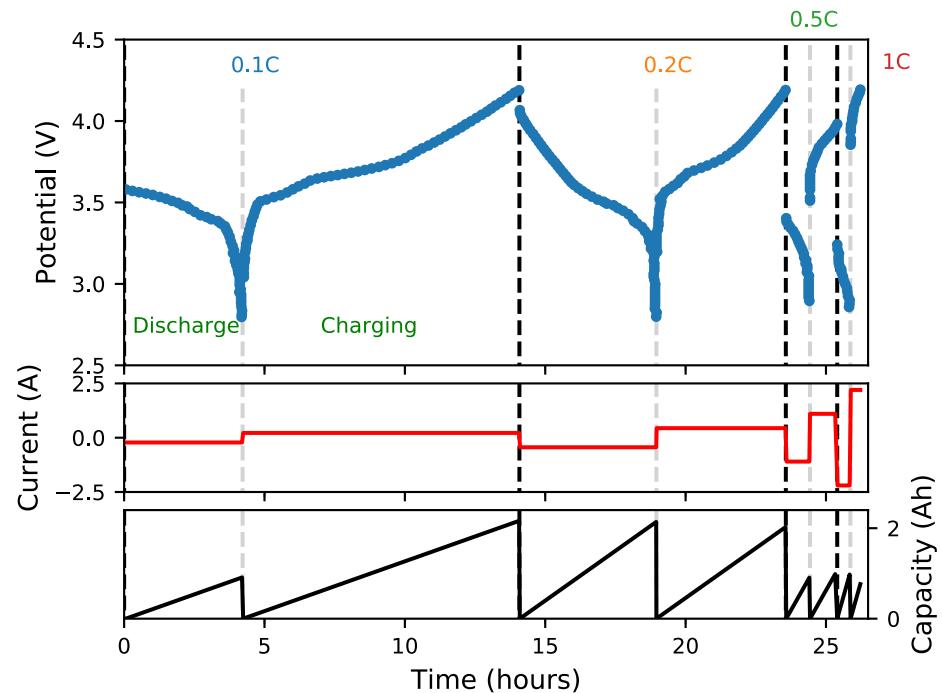


Electrochemical measurements (2)

e.g. for a 2.2 Ah battery:

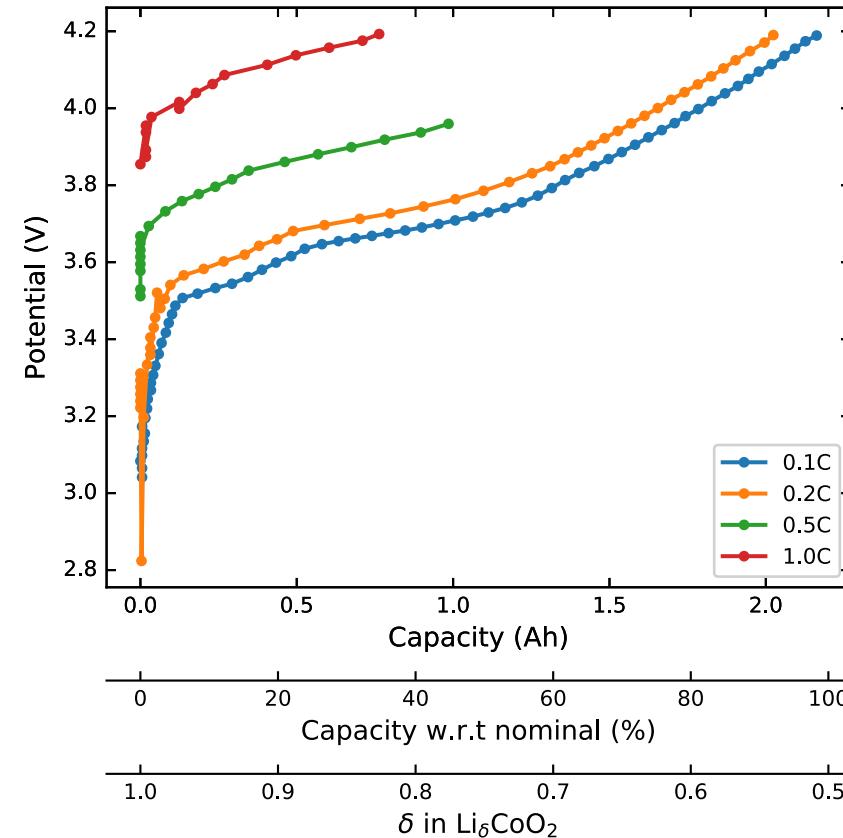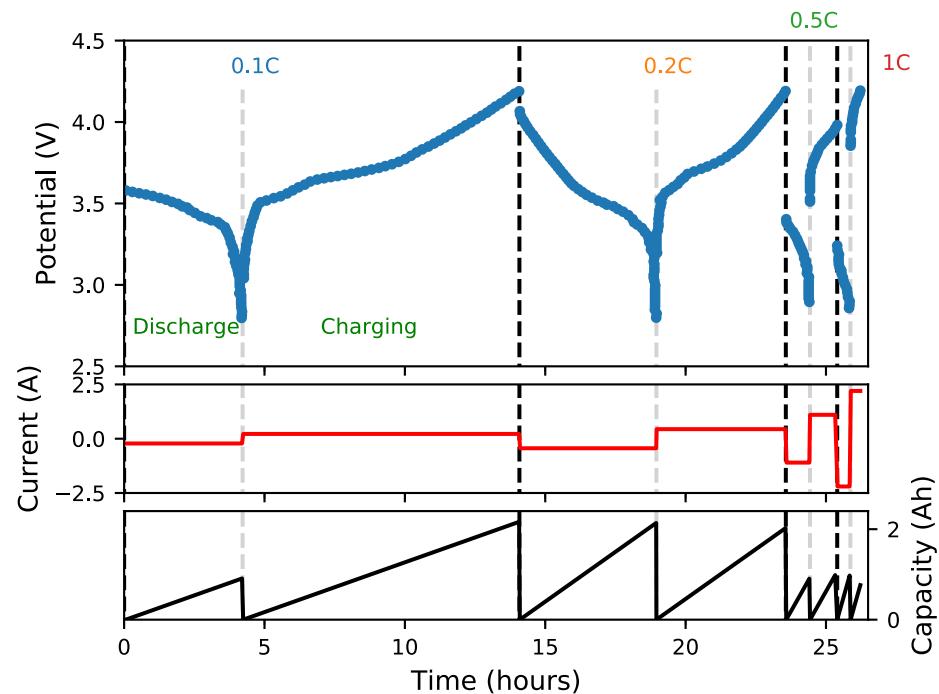

Capacity is often expressed in a number of formats

Material insights from galvanostats

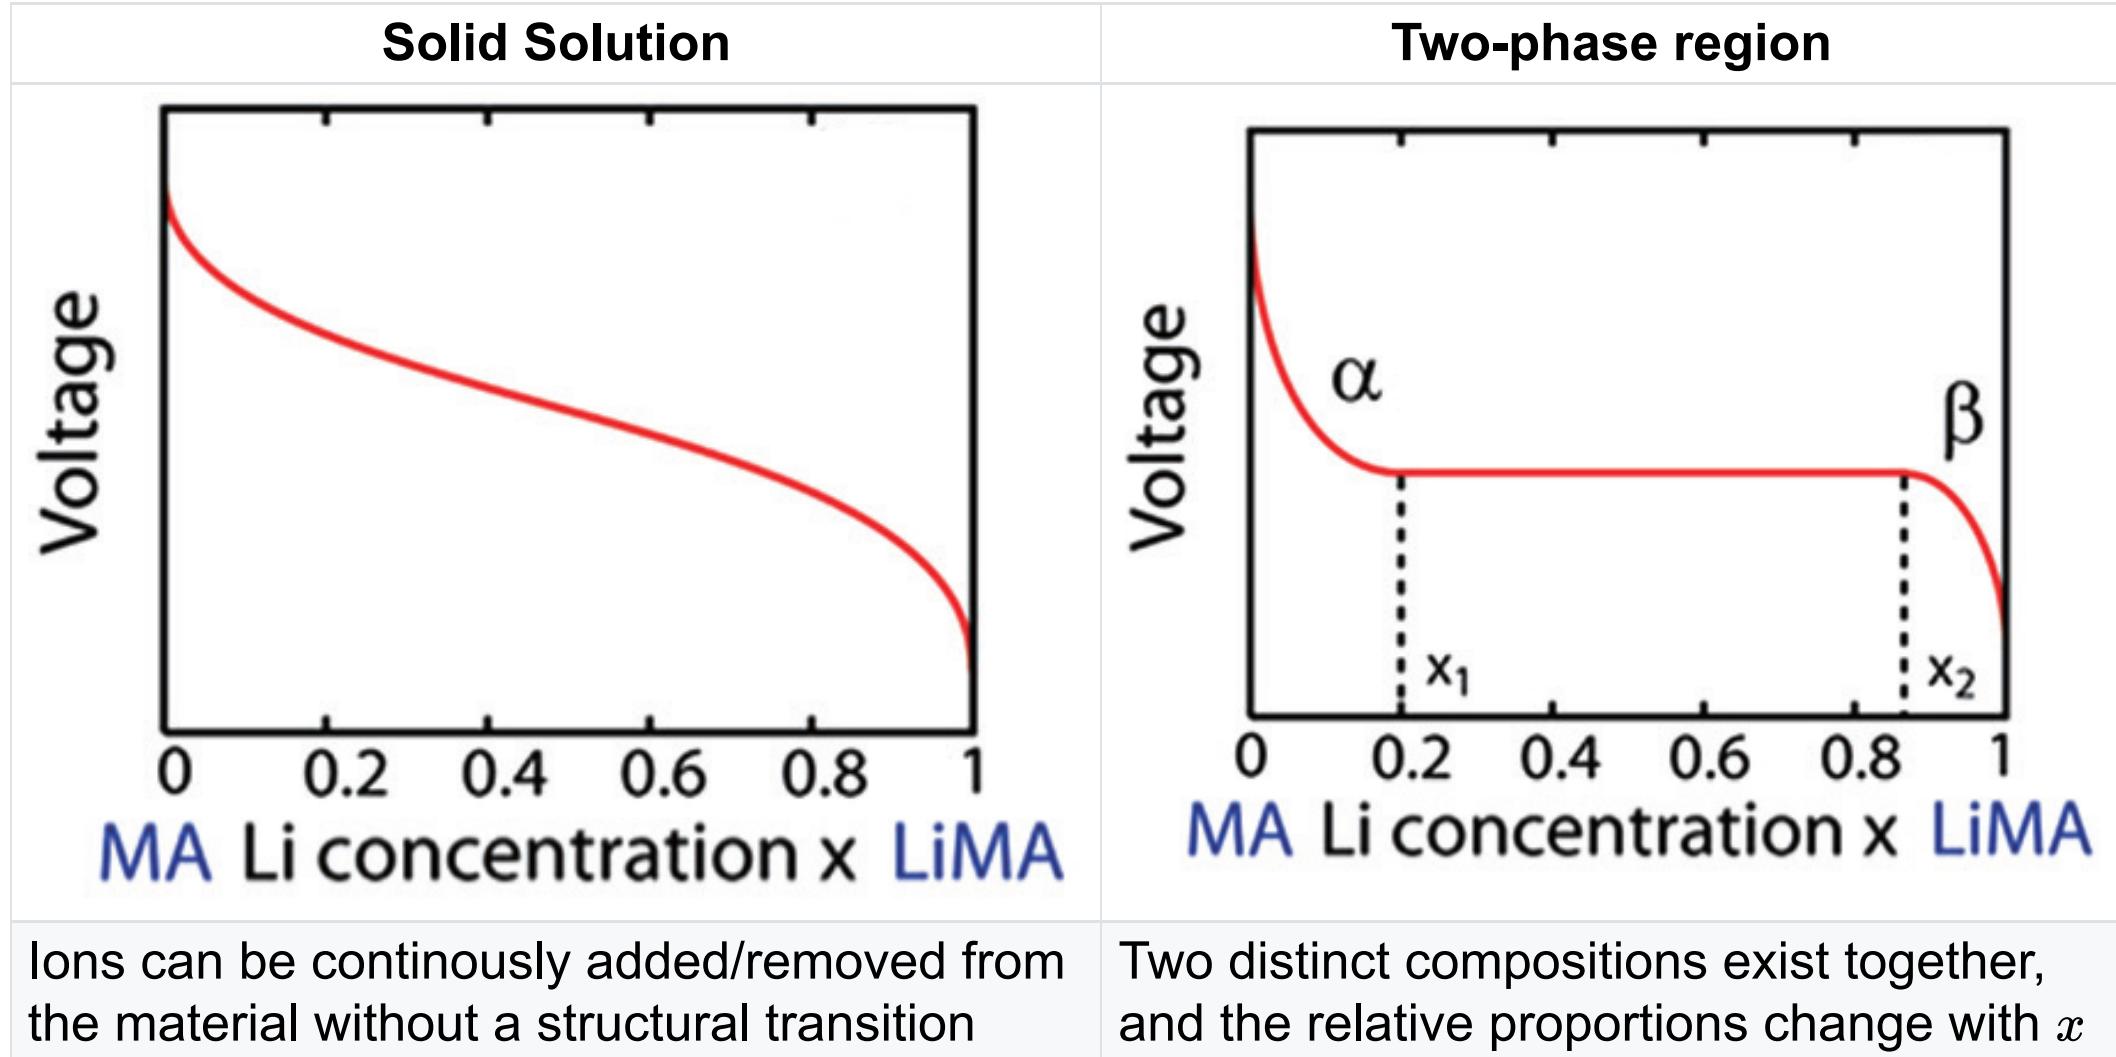

Lecture recap

- we define cathode and anode under discharge conditions!
- two main categories of battery (based on mobile ion):
 - cationic or anionic
- we want to maximise
 - Charge stored Q in materials, and
 - operating voltage V
- Two types of electrode operation:
 - Conversion
 - wide range of chemistry, but problems with volume change and side reactions
 - intercalation
 - limited number of suitable materials
- we can understand the mechanism using galvanostatic electrochemistry

Feedback



Mentimeter

What did you like or dislike about this lecture?

Short answers are recommended. You have 250 characters left.

250 //

You can submit multiple answers

Submit

