Edge and edgels detection

Václav Hlaváč

Czech Technical University in Prague

Czech Institute of Informatics, Robotics and Cybernetics 160 00 Prague 6, Jugoslávských partyzánů 1580/3, Czech Republic http://people.ciirc.cvut.cz/hlavac, vaclav.hlavac@cvut.cz also Center for Machine Perception, http://cmp.felk.cvut.cz

Thanks to O. Drbohlav, T. Svoboda and T. Werner for several slides.

Outline of the lecture:

- Motivation, edges, edgels.
- Three groups of edge operators.
- Finding edges by a convolution.

- Marr-Hildreth edge detector.
- Canny edge detector.
- Scale space.

The input is an image, the output is an image too.

The image is not interpreted.

The aim

- To suppress the **distortion** (e.g., correction of the geometric distortion caused by spherical shape of the Earth taken from a satellite).
- Contrast enhancement (which is useful only if the human looks at the image).
- Noise suppression.
- Enhancement of some image features needed for further image processing, e.g., edge finding.

3/47

Motivation. What are the edges good for?

- Neurophysiological and psychophysical studies hint that locations in images, in which the image intensity changes sharply, i.e. at significant edges = edge elements (abbreviated edgels), are important for visual perception.
- These locations bear more information than other locations in the image.
- Edgels often exhibit fair invariance to changes in illumination and/or viewpoint.
- Our intention is
 - either to **enhance**, i.e., strengthen, high frequencies using the edge sharpening operation
 - or detect ⇒ significant edges.
- Edge detection is often used in computer vision for: recognition of image content, 3D reconstruction of the scene, solving correspondence problem, object tracking, etc.


Example – a drawing






Pablo Picasso, La Sieste 1919


Example – edge detection

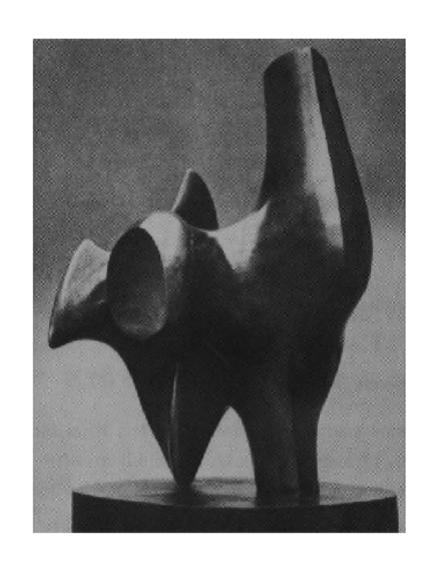

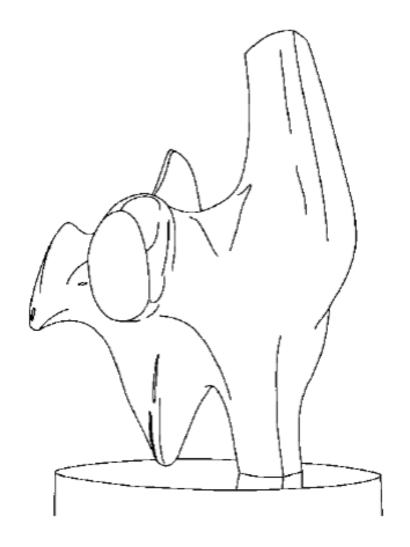

Edge elements origin

Edgels are the result of discontinuities in the surface normal, in depth or in reflectance; they also appear due to highligts or irregularities in illumination (shadows).

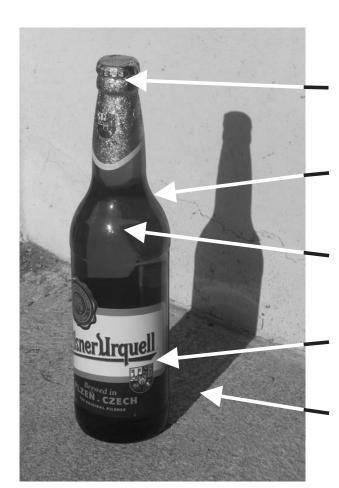

surface normal discontinuity

depth discontinuity

highlights

surface color/texture

shadow/illumination discontinuity



Edge

- is a property of a point (pixel in discrete image) and its neighborhood;
- expresses the speed of the image function f(x,y) (intensity) change and the direction of the maximal growth of it; i.e. it is the gradient $\nabla f(x,y)$;
- is a suitable discrete approximation of a gradient $\nabla f(x,y)$, i.e. is a two component vector.

Edge element (edgel)

- is a point (pixel) with a significant gradient module.
- It implies that some points (pixels) in the image are egels and some are not edgels.
- Edgels are well localized in the image.
- Edgels positions are stable with respect to changing views.


Detectors based on:

- 1. Approximating maxima of first derivatives (Roberts, Prewitt, Sobel etc, Canny);
- 2. Finding zero-crossing of second derivatives (Marr-Hildreth);
- 3. Local approximation of image function by parametric model, usually a polynomial in x,y.


Computing the derivative from the model parameters analytically. (Pioneered in computer vision by R. Haralick)

Gradient of the image function

- lacktriangle For n variables in general, the gradient of a smooth function f is a vector of partial derivatives: $\nabla f(x_1,\ldots,x_n) = \left(\frac{\partial f}{\partial x_1},\ldots,\frac{\partial f}{\partial x_n}\right)$
- For n=1 (1D signal), the gradient simplifies to a (standard) derivative expressed in two notations: f' (Lagrange notation) or $\frac{df}{dx}$ (Leibnitz notation).
- For n=2 (2D signal), $\nabla f(x,y)=\left(\frac{\partial f}{\partial x},\frac{\partial f}{\partial y}\right)$



$$\nabla f = \left(\frac{\partial f}{\partial x}, 0\right)$$



$$\nabla f = \left(0, \frac{\partial f}{\partial y}\right)$$



$$\nabla f = \left(\frac{\partial f}{\partial x}, 0\right) \qquad \nabla f = \left(0, \frac{\partial f}{\partial y}\right) \qquad \nabla f = \left(\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}\right)$$


ullet $\nabla f(x,y)$ is often expressed in polar coordinates by its magnitude and angular direction ψ

$$\|\nabla f(x,y)\| = \sqrt{\left(\frac{\partial f}{\partial x}\right)^2 + \left(\frac{\partial f}{\partial y}\right)^2}, \ \psi = \arctan\left(\frac{\partial f}{\partial y}/\frac{\partial f}{\partial x}\right).$$

Directional derivative



- Consider a 2D function f(x,y), one specific point (x_0, y_0) and a direction given by a vector $\mathbf{u} = (u_1, u_2)$. The corresponding unit vector $\hat{\mathbf{u}}$ to vector \mathbf{u} is $\hat{\mathbf{u}} = \frac{\mathbf{u}}{|\mathbf{u}|}$.
- The directional derivative $\nabla_{\mathbf{u}} f(x_0, y_0)$ is the rate the function f(x,y) changes at a point (x_0, y_0) in the direction **u**. It is defined in two alternative ways
 - $\nabla_{\mathbf{u}} f(x_0, y_0) \equiv \nabla f(x, y) \frac{\mathbf{u}}{|\mathbf{u}|}$ or
 - $\frac{\mathrm{d}f(x,y)}{\mathrm{d}u} \equiv \hat{\mathbf{u}} \cdot \nabla f(x,y) =$ $u_1 \frac{\partial f(x,y)}{\partial x} + u_2 \frac{\partial f(x,y)}{\partial y}$.

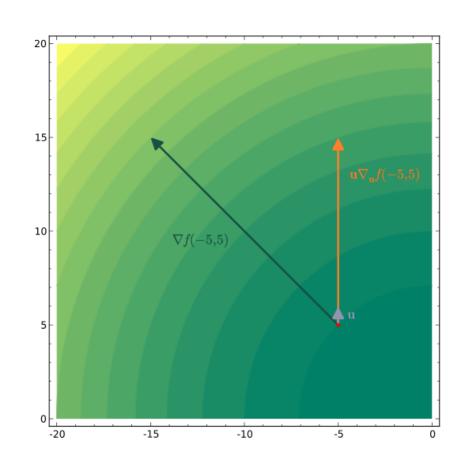

Discrete approximation of a gradient




Can be done by either of these two ways (with similar results).

- Reconstruct the continuous function from the discrete one and compute its derivative.
- Approximate the derivative by finite differences.

Finite differences:

- non-symmetric: $f'(i) \approx f(i) f(i-1)$. (left difference, does not use pixel value f(i+1))
- symmetric: $f'(i) \approx \frac{1}{2}(f(i+1) f(i-1))$ (O.K. but does not use f(i))
- This can be done by convolution: $f' \approx [-1, +1] * f$, $f \approx [-0.5, 0, +0.5] * f$.

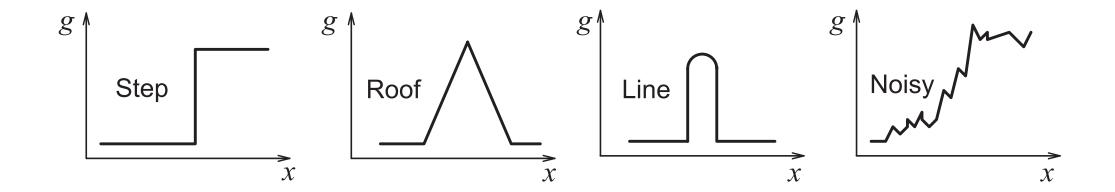


- The first profiles from the left are idealized, i.e. a step edge, a roof edge and a thin line.
- The profile on the right side corresponds to a noise edge. Such edges appear in real images.
- The MATLAB funkction improfile is a nice tool to visualize profiles.


Derivatives are susceptible to noise



image profile with noise

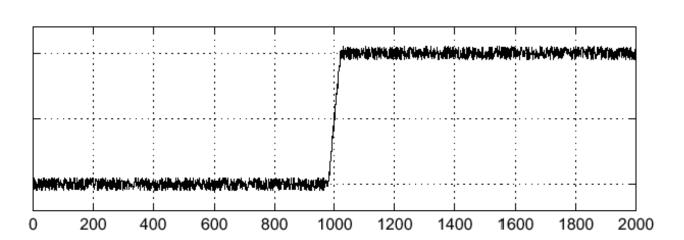


its derivative

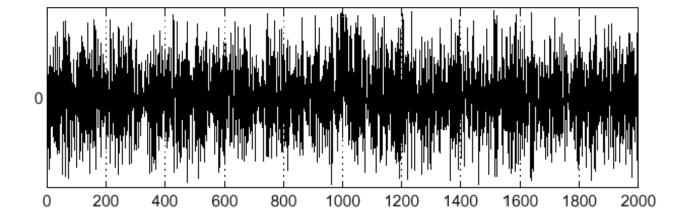

Where is the edge located in the noisy image?


Image should be smoothed before deriving it



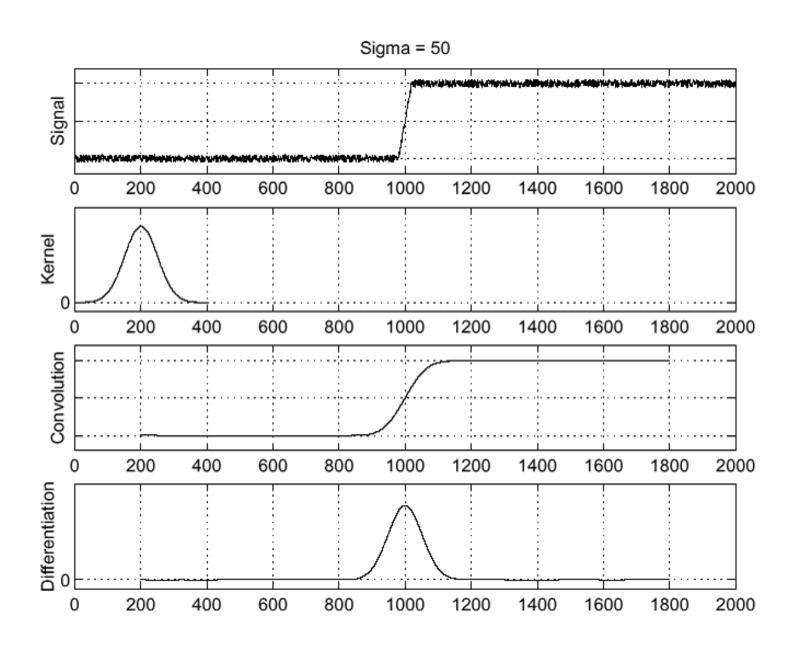

Derivative and convolution interchanged



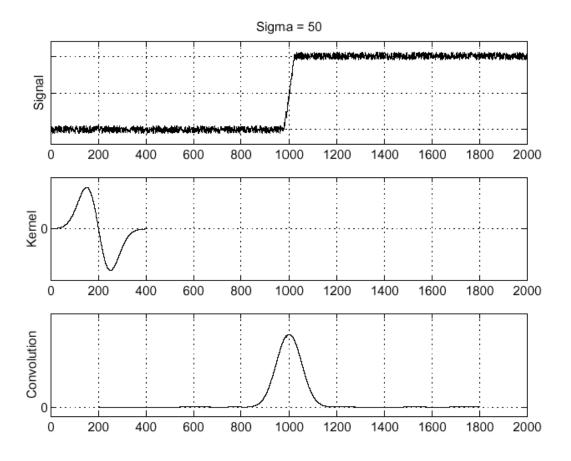


Two involved operators, the derivative and the convolution, are commutative and can be interchanged. Both operations can be combined to a single operator because of their associativity:

$$\frac{\mathrm{d}}{\mathrm{d}x}(h*f) = \frac{\mathrm{d}h}{\mathrm{d}x}*f.$$

Edges and object boundaries



- The calculated edges are sometimes used to seek object boundary.
- Provided the object corresponds to a homogeneous region in the image, the border pixels match to egels.
- Edges are sometimes chained in order to form object boundaries. This is why the edge direction Φ is defined perpendicular to the gradient direction Ψ .

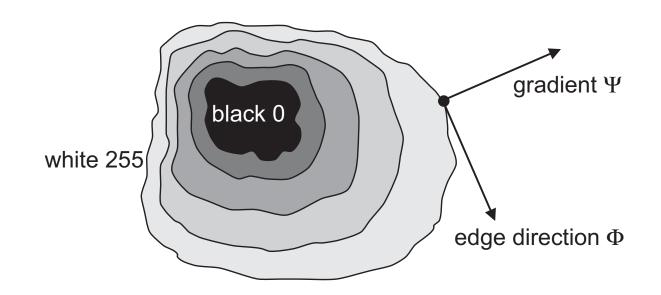

Convolution 3×3 masks estimating derivative



- Roberts (only 2×2), Lawrence Roberts 1963
- Prewitt, Judith Prewitt 1970
- ♦ Sobel, Irwin Sobel 1968
- Robinson
- Kirsch, Russell A. Kirsch 1971 and others
- Laplace (approximates the trace of the image function Hessian)

- Eight possible 3×3 masks exist if 8-neighborhood is considered. This quantizes directions in eight discrete values modulo 45^o .
- The image at a particular location is convolved by these eight masks, one by one. The mask response with the highest convolution absolute value determines the edge direction.

Roberts operator in 2×2 neighborhood

Two convolution masks (coordinates: r - row, c - column)

$$h_1 = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix}$$
, $h_2 = \begin{bmatrix} 0 & 1 \\ -1 & 0 \end{bmatrix}$. $r \downarrow g(r,c) g(r,c+1)$

The magnitude of the gradient is computed as:

$$|\nabla g(r,c)| \approx |g(r,c) - g(r+1,c+1)| + |g(r,c+1) - g(r+1,c)|$$
.

The disadvantage: a high sensitivity to noise because the neighborhood used for the approximation is small.


Prewitt operator in 3 imes 3 neigborhood

$$h_1 = \begin{bmatrix} 1 & 1 & 1 \\ 0 & 0 & 0 \\ -1 & -1 & -1 \end{bmatrix}, h_2 = \begin{bmatrix} 0 & 1 & 1 \\ -1 & 0 & 1 \\ -1 & -1 & 0 \end{bmatrix}, h_3 = \begin{bmatrix} -1 & 0 & 1 \\ -1 & 0 & 1 \\ -1 & 0 & 1 \end{bmatrix},$$

$$h_4 = \begin{bmatrix} -1 & -1 & 0 \\ -1 & 0 & 1 \\ 0 & 1 & 1 \end{bmatrix}, h_5 = \begin{bmatrix} -1 & -1 & -1 \\ 0 & 0 & 0 \\ 1 & 1 & 1 \end{bmatrix}, h_6 = \begin{bmatrix} 0 & -1 & -1 \\ 1 & 0 & -1 \\ 1 & 1 & 0 \end{bmatrix},$$


$$h_7 = \begin{bmatrix} 1 & 0 & -1 \\ 1 & 0 & -1 \\ 1 & 0 & -1 \end{bmatrix}, h_8 = \begin{bmatrix} 1 & 1 & 0 \\ 1 & 0 & -1 \\ 0 & -1 & -1 \end{bmatrix},$$

Example, Prewitt operator edges in the northern direction






original 256×256

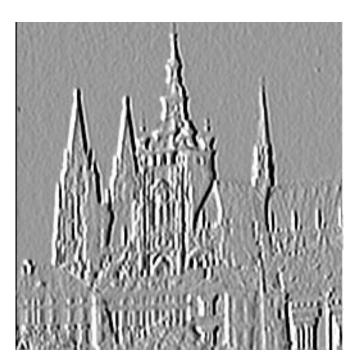

western gradientsnorthern edges

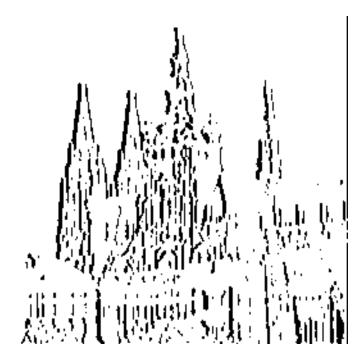


thresholded edges

Example, Prewitt operator edges in the eastern direction






original 256×256

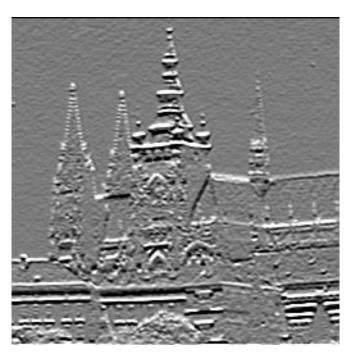

northern gradients = eastern edges

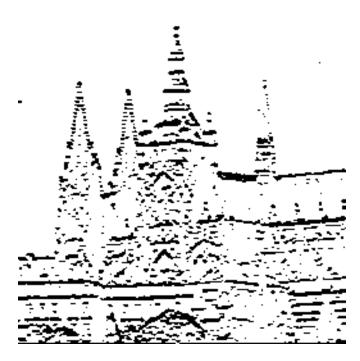

thresholded edges, edgels

Sobel operator in 3×3 neigborhood

$$h_1 = \left| \begin{array}{ccc|c} 1 & 2 & 1 \\ 0 & 0 & 0 \\ -1 & -2 & -1 \end{array} \right| , \qquad h_2 = \left| \begin{array}{ccc|c} 0 & 1 & 2 \\ -1 & 0 & 1 \\ -2 & -1 & 0 \end{array} \right| ,$$

$$h_3 = \begin{bmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{bmatrix}, \dots$$

Robinson operator in 3×3 neigborhood

$$h_1 = \begin{bmatrix} 1 & 1 & 1 \\ 1 & -2 & 1 \\ -1 & -1 & -1 \end{bmatrix}, \quad h_2 = \begin{bmatrix} 1 & 1 & 1 \\ -1 & -2 & 1 \\ -1 & -1 & 1 \end{bmatrix},$$

$$h_3 = \begin{bmatrix} -1 & 1 & 1 \\ -1 & -2 & 1 \\ -1 & 1 & 1 \end{bmatrix}, \dots$$

Kirsch operator in 3 imes 3 neigborhood

24/47

$$h_1 = \begin{bmatrix} 3 & 3 & 3 \\ 3 & 0 & 3 \\ -5 & -5 & -5 \end{bmatrix}, \qquad h_2 = \begin{bmatrix} 3 & 3 & 3 \\ -5 & 0 & 3 \\ -5 & -5 & 3 \end{bmatrix},$$

$$h_3 = \begin{bmatrix} -5 & 3 & 3 \\ -5 & 0 & 3 \\ -5 & 3 & 3 \end{bmatrix}, \dots$$

Image function f(x, y), its Laplacian is:

$$\nabla^2 f(x,y) = \frac{\partial^2 f(x,y)}{\partial x^2} + \frac{\partial^2 f(x,y)}{\partial y^2}$$

- $igoplus
 abla^2 f$ is a scalar, not a vector. There is no "direction" provided.
- The Laplace oprator is rotation-invariant.
- For a monotonically increasing image function f(x,y), Laplacian crosses zero at a place where the gradient $\|\nabla f(x,y)\|$ attains its maximum.

Discrete approximation of Laplacian

The second finite difference is computed from first finite differences:

$$\frac{\mathrm{d}^2}{\mathrm{d}x^2} \approx [-1, +1] * [-1, +1] = [+1, -2, +1]$$

Laplacian is the sum of finite differences in horizontal and vertical directions:

$$\nabla^2 \approx \begin{bmatrix} 0 & 0 & 0 \\ 1 & -2 & 1 \\ 0 & 0 & 0 \end{bmatrix} + \begin{bmatrix} 0 & 1 & 0 \\ 0 & -2 & 0 \\ 0 & 1 & 0 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 1 & -4 & 1 \\ 0 & 1 & 0 \end{bmatrix}$$

Alternatives:

$$\begin{bmatrix} 1 & 1 & 1 \\ 1 & -8 & 1 \\ 1 & 1 & 1 \end{bmatrix}, \begin{bmatrix} 2 & -1 & 2 \\ -1 & -4 & -1 \\ 2 & -1 & 2 \end{bmatrix}, \begin{bmatrix} -1 & 2 & -1 \\ 2 & -4 & 2 \\ -1 & 2 & -1 \end{bmatrix}$$

Sharpening by a Laplacian

Sometimes we do not aim at detecting edgels. Instead, edges should be enhanced (sharpened). Laplacian as an omnidirectional high-pass filter is suitable.



Original 256×256




Edges (Laplace)



Sharpening (- 0,4 ·)

Detector based on 2nd derivative (Marr-Hildreth)

The extremum of the first derivative of a function of a single variable (a 1D signal) matches the location in which the second derivative passes the zero level.

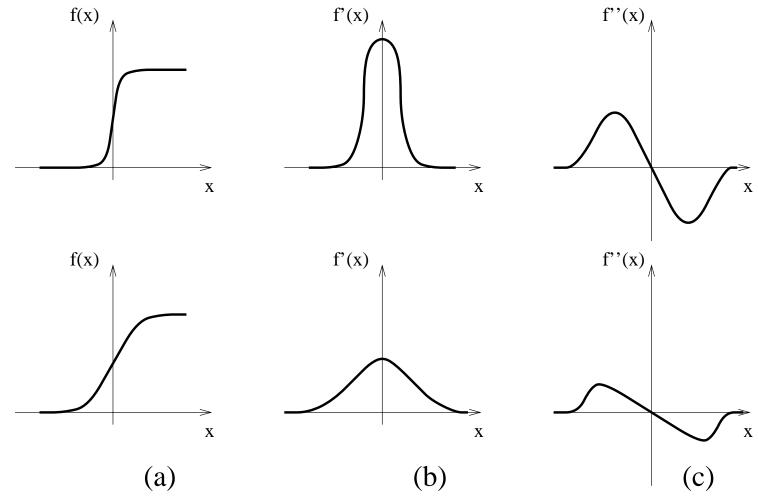

• For functions of two variables, e.g. a 2D image it is not the same: Laplace operator ∇^2 comes into the play.

Laplacian $\nabla^2 f(x,y)$, recall the slide 25, is even more sensitive to noise than the gradient \Rightarrow It is combined with a Gaussian G again. The two operators can be combined to one \rightarrow LoG (Laplacian of Gaussian).

$$\nabla^2(G * f) = (\nabla^2 G) * f = \text{LoG}(f)$$

For a given σ , (substitution due to rotational symmetry $x^2 + y^2 = r^2$):


$$G(r) = e^{-\frac{r^2}{2\sigma^2}}, \quad G'(r) = -\frac{1}{\sigma^2} r e^{-\frac{r^2}{2\sigma^2}}, \quad G''(r) = \frac{1}{\sigma^2} \left(\frac{r^2}{\sigma^2} - 1\right) e^{-\frac{r^2}{2\sigma^2}}.$$

(c is normalization constant)

$$\nabla^2 G(x,y) = c \left(\frac{x^2 + y^2 - \sigma^2}{\sigma^4} \right) e^{-\frac{x^2 + y^2}{2\sigma^2}}.$$

2D operators we came across



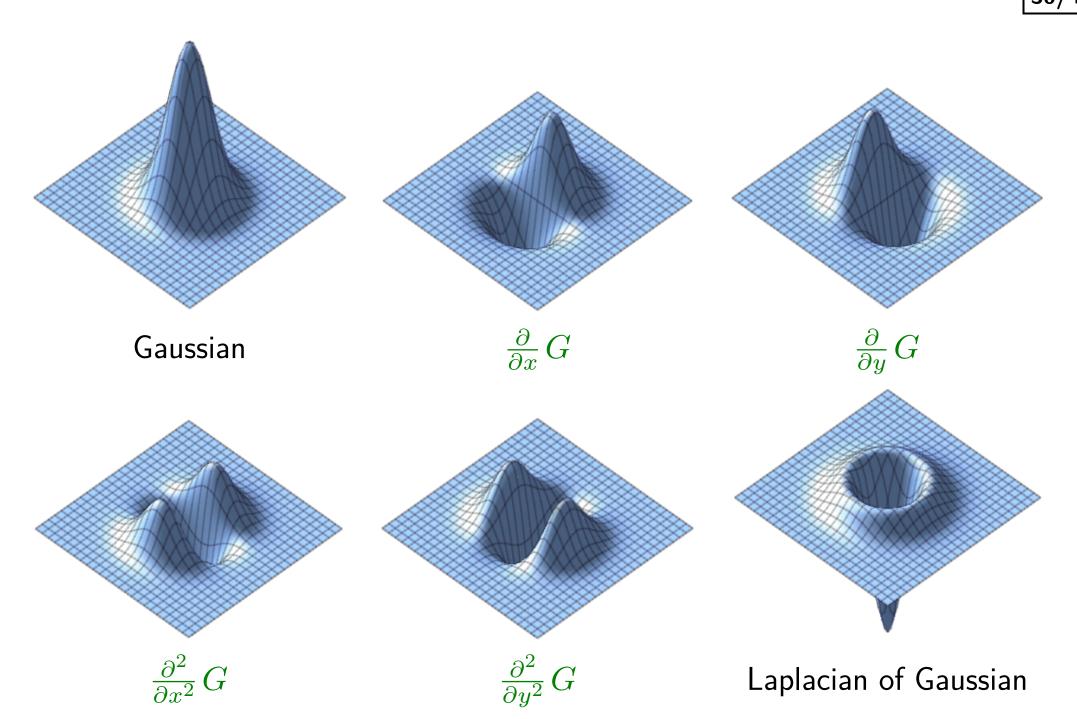

Difference of Gaussians (DoG) as the approximation of LoG



- The aim is to approximate LoG operator, i.e. $\nabla^2 G$.
- The difference of two images created by a Gaussians with two different σ provides a rough approximation o LoG.

- While implementing zero crossing, it is recommended to avoid a naive solution, i.e. thresholding of LoG in the interval close to zero. The discontinuous edgels would be obtained.
- ullet it is better to really detect sign changes, e.g. in a 2×2 mask with representative point in the top-left corner. The edgel is detected if there is a sign change inside the image.

Zero crossings: example







Original

DoG $\sigma_1 = 0, 1 \ \sigma_2 = 0, 09$

Zero crossings


Disadvantages:

- Sharp shapes are blurred to much. E.g. sharp corners are lost.
- lacktriangle Edgels are connected into closed curves \Longrightarrow "A plate of spaghetti".

Additional edge strength thresholding



34/47

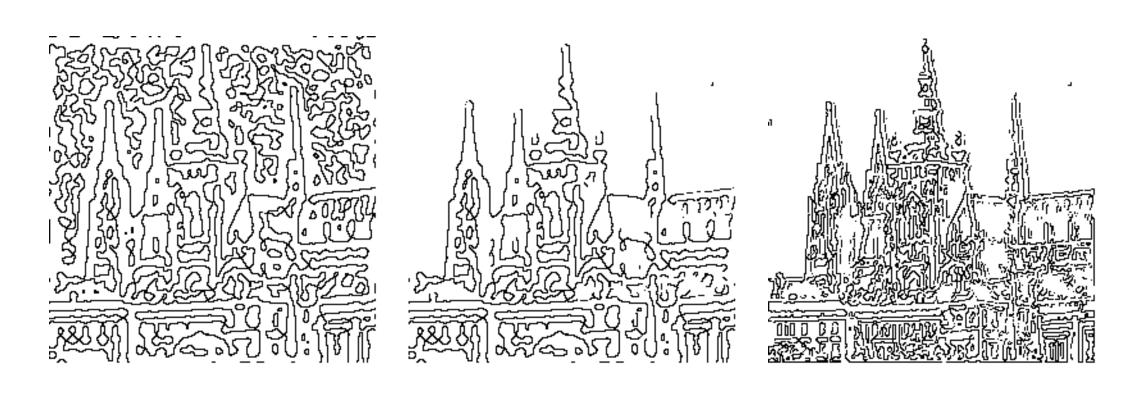

zero crossings

after weak edge removal,

LoG, $\sigma = 0.2$

- lacktriangle The retina evolved from the brain. The retina senses light (rod and cones) and also performs preprocessing. There is about 1:100 data reduction \Leftarrow reduced transmission capacity of the optical nerve.
- Circular receptive fields. Their outer part contributes to the response by a negative sign than the inner part (so called center-surround arrangement).

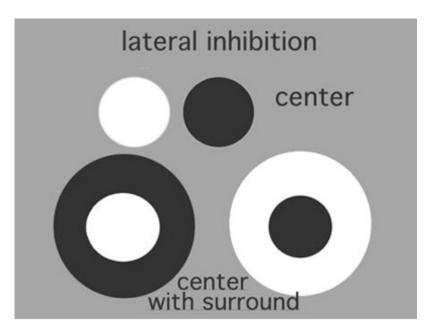


Fig. 10. Center-surround receptive fields can be ON center or OFF center with the oposite sign annular surround.



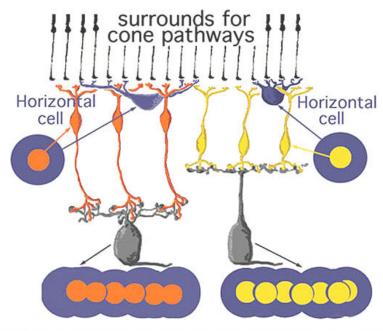



Fig. 12. Diagram of the organization of center-surround responses using horizontal cell circuitry to provide the antagonistic surround.

The smoothing scale selection issue (1)





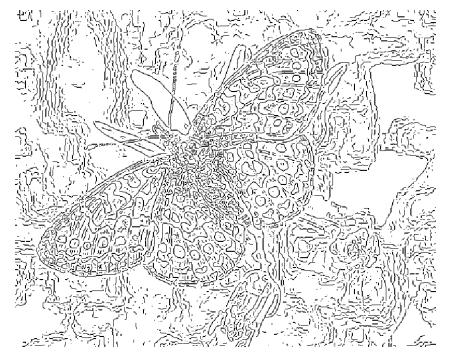

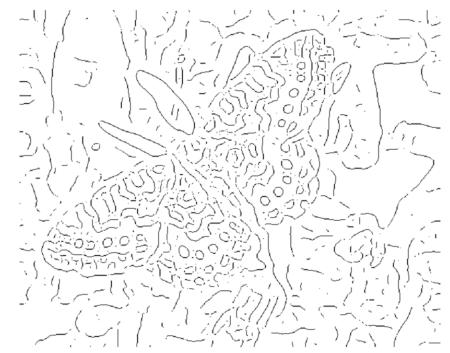



The smoothing scale selection issue (2)




- lacktriangle How to chose Gaussian σ while calculating the derivative? The bigger σ , the ...
 - better noise suppression;
 - more weak edges vanish;
 - smaller eges localization precision.
- This issue is not constraint to edge detection only. It is a general issue appearing while detecting features based on local properties of the image function, e.g. salient points as Harris corners.
- We are often not interested in details even they did not appear due to noise. Imagine we wish to look at the image from the 'bigger distance' and detect only more important edgels or other primitives.

Scale space (for 1D signal)



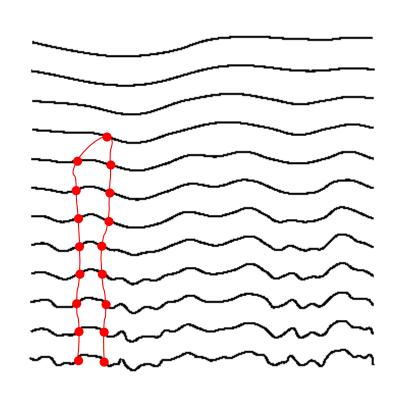

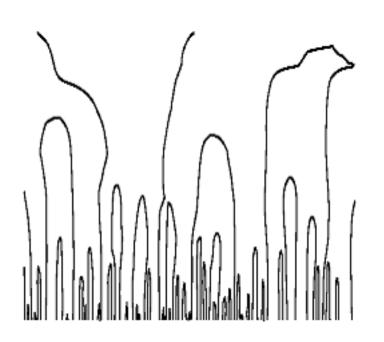

While the scale grows (σ increases) the edgel can vanish by being connected to other edgel. However, a new edgel is not created.

2D: T. Lindeberg (1994) Scale-Space Theory in Computer Vision, Kluwer Academic Publishers/Springer, Dordrecht, Netherlands, 1994.

Canny edge detector




- A simple detector addressing the shortcomings of majority of (even simpler) detectors.
- It is used in many applications.

Algorithm:

- 1. Compute gradient directions.
- 2. For each pixel, compute smoothed 1D directional derivative in the gradient direction.
- 3. Find the magnitude maxima of these derivatives.
- 4. Get edgels by thresholding with hysteresis.
- 5. Performs the synthesis of edgels obtained for different smoothing (simple implementations do not perform this step).


Optimal linear operator for edge detection



A simplified model is assumed: the ideal step edge; additive Gaussian noise independent on the image.

What do we want to maximize?:

- Reliable detection (find almost all existing edges);
- Good localization (small error in tje edge position);
- Unique responses (minimum nonexisting edges found).

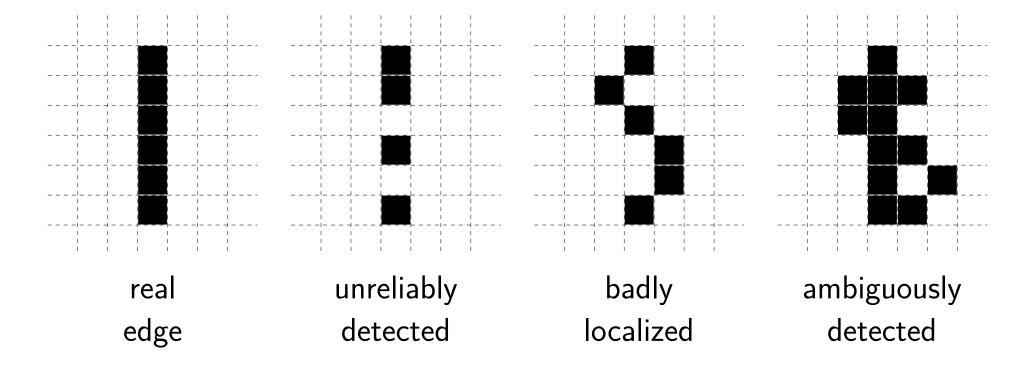

Optimal linear operator for detecting edges




- Contradicting requirements: The better edge detection the worth edge localization.
- The 'best' compromise is sought: the product of criteria 1 and 2 is optimized and, finally, the criterion 3 is added (details are omitted here for brevity).
- The result cannot be written using a single formula. However, its spirit is very similar to the derivative of the Gaussian.

m p


Finding maxima of derivatives in 1D

42/47

Why? Thresholding is not the way to go (leads to thick object boundaries.)





• It is better to localize the maximum of derivative (non-maxima suppression.)



Possible to localize the maximum with a sub-pixel precision.

- 1D maxima are sought in an approximate direction of the gradient.
- The image function in the gradient direction is sampled by a grid.

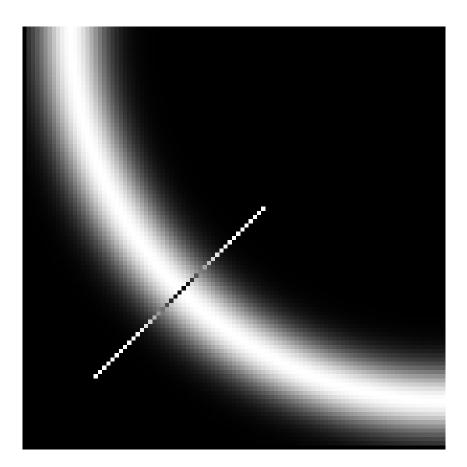


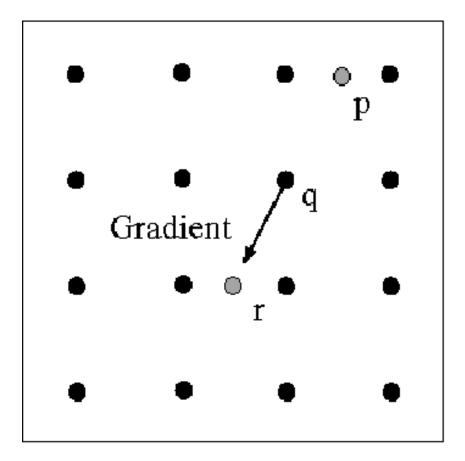


m p

Canny edgels by thresholding with hysteresis


- Why? We want to suppress short (usually unimportant) chains of edgels. At the same time, we aim at avoiding fragmentation of long edgel chains likely corresponding to object boundaries.
- This cannot be done by thresholding. The trick is to use two thresholds $T_1 < T_2$. Edges stronger than T_2 are automatically edgels. Edgels stronger than T_1 are linked if connected to stronger edges.

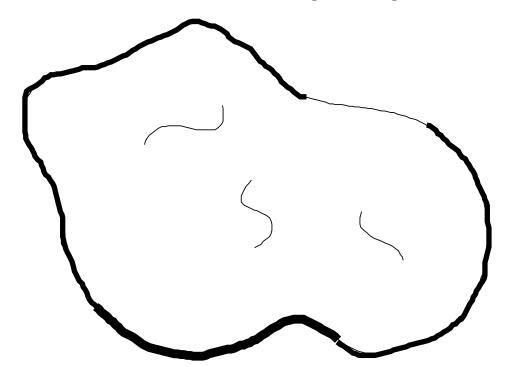


How the scale has to be determined?





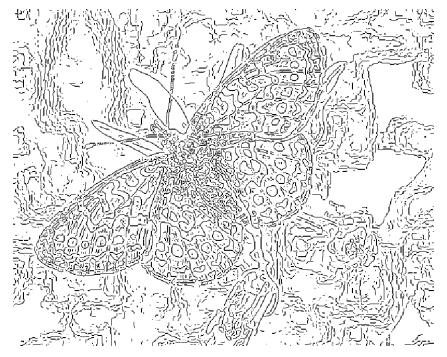

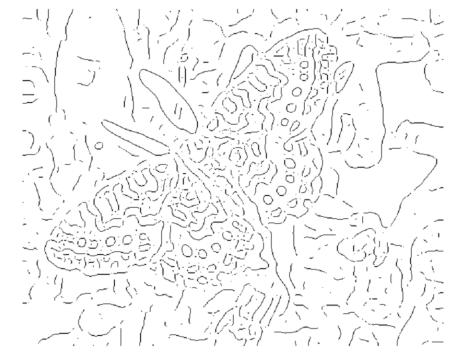

Chaining edges to lines





- filtered by Laplace
- detected zero-crossings
- chained to lines



Criticism of edges at corners



- Edge detectors (e.g. LoG, Laplacian of Gaussians) are not precise 'at corners'.
- Edge detectors do not serve for finding corners, though.
- We have corner detectors for detecting corners (see the separate lecture).