

Towards SC-enabled high density highly miniaturized power LED drivers: A model-centric design framework

PROEFSCHRIFT

ter verkrijging van de graad van doctor aan de Technische
Universiteit Eindhoven, op gezag van de rector magnificus
prof. dr. ir. F. P. T. Baaijens, voor een commissie aangewezen
door het College voor Promoties, in het openbaar te
verdedigen op woensdag ?? april 2016 om 16:00 uur.

door

Julià Delos Ayllón

geboren te Mataró, Catalonië

Dit proefschrift is goedgekeurd door de promotor. De samenstelling van de promotiecommissie is als volgt:

voorzitter:	prof. dr. ir.A. C. P. M. Backx
1 ^e promotor:	prof. dr.E. A. Lomonova
copromotoren:	prof. dr.E.J. Alarcón Cot (UPC BarcelonaTECH) ir.M. A. M. Hendrix
leden:	prof. dr.B. Allard (INSA Lyon) prof. dr.E. Cantatore dr.G. Villar Piqué (NXP) dr.T. Lopez Julià (Lumileds)

Het onderzoek dat in dit proefschrift wordt beschreven is uitgevoerd in overeenstemming met de TU/e Gedragscode Wetenschapsbeoefening.

Contents

1	LEDification: Transition towards LED lighting	3
1.1	Research goal and objectives	14
1.1.1	Thesis outline	15
2	LED load and driver trichologies	21
2.1	The LED as a load	21
2.2	Linear Regulators	23
2.3	Inductor Based Converters	24
2.3.1	Energy transfer in switched inductor converters	25
2.4	Capacitor Based Converters	27
2.4.1	Energy transfer in switched capacitor converters	28
2.5	Overview in integration of LED drivers	29
2.6	Summary	30
3	Hybrid-Switched Capacitor LED driver	33
3.1	State-of-the-art in SCC based LED drivers	33
3.2	Switched Capacitor Converter	35
3.2.1	Conversion ratio	36
3.2.2	Output voltage regulation	37
3.2.3	Multiple conversion ratio converters	38
3.2.4	Converter output nodes	39
3.3	Hybrid-Switched Capacitor Converter	40
3.3.1	Output Regulation	43
3.3.2	Power Inductor	44
3.3.3	Power Switches	48
3.3.4	Multiple Outputs	51
3.4	DC-DC LED Drivers	52
3.4.1	Single-stage $dc-dc$ with auxiliary output voltage	53
3.4.2	Single-stage $dc-dc$ with extended conversion range	54
3.5	Summary	54
4	Modeling of H-SCC	59

4.1	Single Output Converters	60
4.1.1	The Output Resistance Model	60
4.1.2	Revising the charge flow analysis approach	63
4.1.3	Load Model: Voltage Sink versus Current Sink	63
4.1.4	Re-formulating the charge flow analysis	64
4.1.5	Solving the charge flow vectors	69
4.1.6	SSL Equivalent Resistance	71
4.1.7	FSL Equivalent Resistance	72
4.1.8	Equivalent Switched Capacitor Converter Resistance	73
4.1.9	Conversion ratio	77
4.2	Multiple Output Converter	78
4.2.1	The Output Trans-Resistance Model	78
4.2.2	Power losses and trans-resistance parameters	79
4.2.3	Trans-resistance Parameters Methodology	81
4.2.4	Slow Switching Limit Trans-resistance Matrix	82
4.2.5	Fast Switching Limit trans-resistance Matrix	83
4.2.6	Converter trans-resistance Matrix	83
4.2.7	Conversion Ratio Vector	84
4.3	Summary	84
5	Model validation	87
5.1	Single output validation	87
5.1.1	Measuring r_{sc} from a SCC	88
5.1.2	Fixed dc -output	89
5.1.3	Floating pwm -output	91
5.2	Multiple output validation	99
5.2.1	Measuring \mathbf{Z}_{sc} matrix from a SCC	99
5.2.2	Simulation results	100
5.2.3	Experimental results	102
5.3	Summary	102
6	H-SCC LED driver	107
7	Conclusions	109
	Appendix A Modeling of Switched Capacitors Converters	113
A.1	3:1 Dickson converter vectors	113
	Appendices	

List of Figures

1.1	Philips lights advertisement from 1900	4
1.2	Compact fluorescent lamp	4
1.3	Bare die of a working blue LED	5
1.4	U.S. Lighting Service Forecast, 2013 to 2030 [22].	7
1.5	900 lumens LED light bulb.	10
1.6	Breakdown costs and forecasts in LED lighting	12
1.7	Exploded vision of an LED light bulb.	13
1.8	Power System in a Package buck converter.	14
2.1	Idealized LED voltage-current characteristic, with the <i>forward voltage</i> v_f identified and a projection of the <i>bias point</i> P	22
2.2	Linear driver, <i>left</i> - schematic; <i>right</i> - conversion ratio vs. efficiency characteristics	23
2.3	Low-dropout (LDO) LED driver regulator. The load current i_o is fixed by the voltage v_{ref} , despite perturbations in v_{src} and the diode voltage.	24
2.4	Inductor based converter, <i>left</i> - buck converter schematic; <i>right</i> - conversion ration <i>vs.</i> efficiency curve comparing the <i>theoretical</i> and a <i>practical</i> limit.	25
2.5	Magnetic components marked with a black square in a mains connected LED driver. These components dominate the volume of the converter.	25
2.6	Energy transfer in an inductor.	26
2.7	Switched capacitor converter, <i>left</i> - 2:1 converter schematic; <i>right</i> - conversion ration <i>vs.</i> efficiency curve for of a generic multiple conversion ration stage	27
2.8	Energy transfer in a capacitor.	28
2.9	Block diagram of a commercial LED driver IC used in back-lighting applications.	30
2.10	<i>Hybrid</i> -SCC LED Driver	31

3.1	Block diagram of the common architecture used in <i>charge pump</i> LED drivers for backlighting small screens in portable applications.	34
3.2	3:1 Dickson Converter.	35
3.3	3:1 Ladder Converter.	35
3.4	Equivalent circuits of the modes in 3:1 Dickson converter.	36
3.5	Linear regulated SCC	37
3.6	Efficiency comparison between a linear regulator and a SCC	38
3.7	Multiple conversion ratio converter.	39
3.8	Nodes types in a SCC	40
3.9	A 3:1 H ² -Dickson topology with the inductor connected to the second <i>pwm</i> -node.	40
3.10	Transient voltage at the switching node of the switching node v_x of the 3:1 H ² -Dickson in Figure 3.9	41
3.11	Two switching phases of 3:1 H-Dickson ²	42
3.12	Transient voltage at the different <i>pwm</i> -nodes of the 3:1 H-Dickson converter of Figure 3.9.	43
3.13	Comparison of regulation-efficiency characteristics between converters.	44
3.14	Inductor based converter, <i>left</i> - synchronous buck converter schematic; <i>right</i> - transient voltage at the switching node during two switching periods.	45
3.15	Inductance value for Buck, 3:1 H-Dickson and 4:1 H-Dickson converters as function of the conversion ratio; results are normalized for $V_{src} = 1V$, $T_{sw} = 1s$ and $\Delta i = 1A$	46
3.16	Peak energy storage for Buck, 3:1 H-Dickson, and 4:1 H-Dickson converters as function of the conversion ratio; results are normalized for $P_{out} = 1W$ and $f_{sw} = 1Hz$	47
3.17	Peak energy storage normalized with respect to a buck converter for a 3:1 H-Dickson and a 4:1 H-Dickson converters as function of the conversion ratio.	48
3.18	Switching loss ratio for Dickson and Ladder converters with respect to the buck converter.	50
3.19	Two output H-SCC	51
3.20	Gswitching node in the buck	52
3.21	Gswitching node in the H-SCC	52
3.22	5:1 H ² -Dickson 12W LED driver	53
3.23	5:1 H-Dickson LED driver 24V-12V-4V 12W LED driver	54
4.1	Block diagram of a two port SCC	60
4.2	Output resistance model	60
4.3	Equivalent output resistance curve	61
4.4	Current waveforms in the converter's capacitors	62
4.5	Two different load models	64
4.6	Charge flow in a 3:1 Dickson with an infinite output capacitor.	66
4.7	Charge flow in a 3:1 H-Dickson.	66

4.8	Voltage ripple in the SCC's capacitors	67
4.9	3:1 H ² -Dickson with the load connected to the second <i>pwm</i> -node. . .	69
4.10	The two switching modes of 3:1 H-Dickson of Figure 3.9	71
4.11	1:1 SCC	73
4.12	<i>Makowski</i> approximation of the r_{scc}	74
4.13	Different approximations methods for r_{scc} scenario I	75
4.14	Different approximations methods for r_{scc} scenario II	76
4.15	Block diagram of a multi-output SCC	78
4.16	Output trans-resistance model of a switched capacitor converter. . .	78
4.17	Two output converter.	79
5.1	Experimental arrangement used to measure r_{scc} from a SCC.	89
5.2	3:1 Dickson circuit used to validate the model accuracy in the prediction of r_{scc} for the <i>dc</i> -node. Odd numbered switches belong to phase 1, even numbered switches belong to phase 2, and D corresponds to the duty cycle of phase 1.	89
5.3	r_{scc} from the <i>dc</i> -node of the converter of Figure 5.2. \square <i>markers</i> are the experimental results compared with the <i>solid black lines</i> predicted by the model at different f_{sw} <i>top-to-bottom</i> : 100kHz, 1MHz, 10MHz and 100MHz. The model results are given for the different approximations: Original (\circ), Makowski (+), Makowski modified (\times); and the <i>gray markers</i> are the relative error for the different approximations. The <i>dashed gray line</i> corresponds to the original charge flow analysis, and the <i>dotted gray line</i> to a posterior enhancement including the effects of the output capacitor.	93
5.4	r_{scc} from the <i>dc</i> -node of the converter of Figure 5.2 for a sweep of f_{sw} . \square <i>markers</i> are the experimental points. The <i>solid black lines</i> are the different modeling methods, and the <i>gray markers</i> the relative error of each method. Plots are presented for different duty cycles: <i>Rows top-to-bottom</i> - $D = 23.3\%$, $D = 50\%$ and $D = 76.7\%$. And also for different c_o values: <i>columns left-to-right</i> - c_{fly} , $10 c_{fly}$ and $100 c_{fly}$	94
5.6	Equivalent Output Resistance (r_{scc}) as function of the relative size of the output capacitor (<i>dc</i> -capacitor) with respect to the flying capacitors for the 3:1 Dickson converter of Figure 5.2. Results presented for the converter operating at $f_{sw} = 100kHz$ with capacitors $c_1 = c_2 = c_{fly} = 100nF$ and all switch resistances $r_{on} = 100m\Omega$. . .	95
5.7	3:1 H ² -Dickson circuit used to validate the model accuracy in the prediction of r_{scc} for the <i>pwm</i> -node. Odd numbered switches belong to phase 1, even numbered switches belong to phase 2, and D corresponds to the duty cycle of phase 1.	96

5.8	r_{scc} from the <i>pwm</i> -node of the converter of Figure 5.2. \square markers are the experimental results compared with the <i>solid black lines</i> predicted by the model at different f_{sw} <i>top-to-bottom</i> : 100kHz, 1MHz, 10MHz and 100MHz. The model results are given for the different approximations: Original (\circ), Makowski (+), Makowski modified (\times); and the <i>gray markers</i> are the relative error for the different approximations.	97
5.9	r_{scc} from the <i>pwm</i> -node of the converter of Figure 5.7. <i>Plots 1-5 top-to-bottom</i> - Frequency sweep for different duty cycles: 10%, 23%, 50%, 63% and 90%. \square markers are the PLECS results and the <i>solid lines</i> the model results using the different approximations: <i>o</i>) Original, <i>+</i>) Makowski, <i>x</i>) Makowski modified. <i>Bottom-right plot</i> - Parametric plot of the predicted r_{scc} using the original approximation all the simulated duty cycles.	98
5.10	Circuit used for the experimental setup, 2:1 SCC, presenting all the available outputs. In the experimental setup the outputs were loaded with constant current sinks.	99
5.11	Experimental arrangement used to test and measure the \mathbf{Z}_{scc} matrix.	100
5.12	SSL comparison between PLECS simulation and the proposed model.	101
5.13	FSL comparison between PLECS simulation and the proposed model.	101
5.14	Measured \mathbf{Z}_{scc} from a 2:1 SCC experimental converter.	103
5.15	Measured \mathbf{Z}_{scc} from a 2:1 SCC experimental converter.	104

List of Tables

1.1	Characteristics for different lamp technologies (winter 2015).	9
2.1	Electrical characteristics of different commercial LEDs	23
3.1	Intrinsic conversion ratios, m_i , at the different nodes of a 3:1 H-Dickson converter.	44
3.2	Stress voltages at the switches of the 3:1 H-Dickson of Figure 3.9. . .	49
3.3	Switch blocking voltage of Dickson and Ladder converters.	50
5.1	3:1 Dickson design parameters used in PLECS.	88
5.2	Simulation profiles associated with the different operation modes. .	101

Chapter 1

LEDification: Transition towards LED lighting

The light bulb is one of the most relevant inventions from our past history. Electrical lighting was definitely a revolution in the early 19th century society; for the first time in history people had a clear, reliable and safe source of artificial light was embedded in a single device easy to distribute and control. The apparition of the electrical light bulb was also, without doubt, the trigger for the commercialization of electric power and the deployment of the first power distribution networks [24]. The impact was to such a degree that it settled two capital sectors of the present industry, the lighting and the electric power distribution, with world recognized companies such as Philips, General Electric and Osram. Actually, both sectors have been so close related that often we use the word *light* when we actually mean *electricity*. In short, a single invention changed our society forever, bringing light and electricity to our homes.

The drive for high efficient light sources


From the initial invention of the first incandescent light bulb onwards, important research has continuously been done to improve the most important characteristic of the incandescent light bulb, the efficacy. Incandescent light bulbs are extremely inefficient at generating light, with a luminous efficacy between $12.6\text{lm}/\text{W}$ for a tungsten incandescent bulb, and up to $24\text{lm}/\text{W}$ for a quartz halogen lamp (see Table 1.1). In a more comprehensive way, we can say that in general incandescent lights convert just at most 5% of the supplied energy in light and at least 95% in heat. Knowing that lighting represents 17% of world energy consumption, we can account that 15% of the world's consumed power is transformed to heat and



Figure 1.1: Philips advertisement from 1900 comparing what was before - *Vroege*, an oil lamp- and now - *Today*, the incandescent light bulb [1].

only 1.7% is transformed real light ¹. Although generating heat is not intrinsically negative, specially for spaces that have to be heated, the propose of a light is to illuminate the space in the most efficient meaner; that is why there is a motivation and necessity to improve the efficacy/efficiency of light bulbs.

Figure 1.2: Exploded view of Philips SL the first compact fluorescent lamp launched to the market [1].

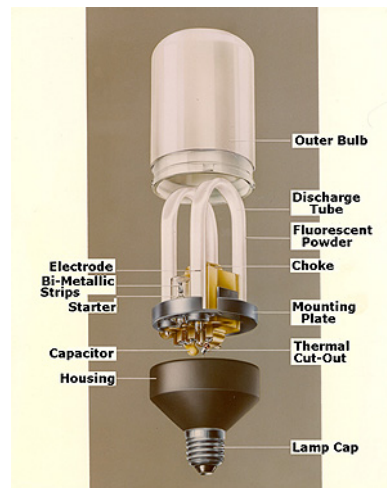

Gas-discharge lamps were one of the first alternatives for incandescent lamps that proved a better efficacy, with the fluorescent tub the most popular in this family. The low pressure mercury-vapor gas-discharge lamp, commonly called *fluorescent*, was probably on of the first relevant innovations in the lighting industry [15]. Initially the tubes where mainly used for the interior lighting of industrial buildings, offices,

¹Estimated values for the year 2008

schools and similar [7, 23], and after, in the late 1980's, started populating households with the appearance of the *compact fluorescent lamps*² (CFLs) [7], being currently the market standard for energy efficient light bulbs [10]; as shown in Figure 1.2. Fluorescent lamps are indeed a big improvement in efficacy with respect to the incandescent lamps. The luminous efficacy ranges between 52-100 lm/W depending on the color rendering index (CRI), converting about 22% of the input power to visible light. More details of other gas-discharge bulbs are presented in Table 1.1. Notwithstanding the better efficiency of the CFLs, due to the following reasons they have not yet fully replaced the inefficient incandescent ones [10]:

- Standard CFLs are not dimmable. Dimmable CFLs are more expensive, their behavior is not standardized among manufacturers, producing mismatches in the light output between lamps, what does not satisfy consumer's desires.
- CFLs have a slow warm-up time³. Not being suitable for places where lights are turned on for short times.
- CFLs have unappealing form and look. Some can not fit in existing fixtures that mount incandescent lamps. The *pig tail* appearance is not attractive when bulbs are exposed.
- The low price of the incandescent light bulb compared to a CFL is more attractive for the consumer. Although CFLs save more money due to power savings, the end consumers are still repelled by the retail price of the lamps.

Therefore, in 2012, it was estimated that in residential environments more than 50% of the installed light bulbs were still incandescent [21]. Showing still the need for a another lighting technology capable of replacing the old inefficient incandescent lamps.




Figure 1.3: Bare die of a working blue LED .

²Screw-in version of a fluorescent tube. Currently you can find a CFL replacement for almost the majority of sockets in the market.

³Gas-discharge lamps have to be warm in order to volatilise and mix chemical elements that compose the gas. Depending on the chemical elements this process can take from a minute up to ten minutes.

High Brightness LED, a new lighting technology

Actually the bases of one potential new technology were settled in 1994, with the invention of the high-efficiency blue *light-emitting diode* (LED) by Sush Nakamura's [18], shown in Figure 1.3. A subsequent finding after the initial work of Isamu Akasaki and Hiroshi Amano [5], where it was demonstrated that was possible to generate blue light from semiconductor materials. Blue light is fundamental to generate with the light for LED lamps [20]. Both findings were key steps in the transforation of the artificial lighting towards the solid state lighting (SSL), with such an important relevance that they were awarded with the 2014 Nobel prize in physics [4]

The advantages of SSL are:

Efficiency The light generation inside a LED is the direct mechanism of hole-electron recombination. The supplied energy is better used compared to an incandescent lamp. The power consumption can be up to an order of magnitude lower than an incandescent light.

Size LEDs are tiny and flat devices, which can be considered as 2-D elements, and do not need any vacuum chamber to work. They are much more flexible in the assembly process and can easily replace the old glass-based bulb design.

Color LED light has a very narrow light spectrum that can be used to produce colored light directly. Colored lights are growing in popularity in households, becoming a decoration piece or mood tweaking device.

Dynamics Compared to any of the traditional sources of light, LEDs have no dynamics. Actually they have, but they are so fast that cannot be tracked by the human eye. They do not have any setting time when turned on, contrary to the CFLs. Their fast dynamics allow to modulate the light and even transmit data without disturbing human beings [16, 26].

Lifetime Solid State devices do not wear out, therefore they can be considered to have an infinite lifetime. In practice LEDs make use of organic phosphores, thus the light quality degrades over used time. The practical life expectancy of the LED is rated from 20.000 - 100.000 hours, 20 to 100 times longer than the life expectancy of the classical light bulbs. In order to take advantage of this long life, the different elements of lighting systems must be properly designed otherwise the lamps can experience a short life [19].

Solid State Lighting forecasts and transitions periods

Just looking at the benefits that LEDs offer LED in terms of efficiency, the projected energy savings for 2020 are 297TWh only in USA. The *United States Environmental Protection Agency* [22] published that reducing the household lighting energy consumption by half - easy to achieve by using LED lighting - more than \$13 billion a

year in energy costs could be saved, more than 80 million metric CO_2 tones would be avoided each year. The advantages of LED lamps are so relevant that the *United States National Lighting Bureau* [22] forecasts a market penetration growth from 5% in 2015, to 74% in 2020 and reaching 88% in 2030, as shown in the graph of Figure 1.4. Hence in the near future almost all lighting technology will be LED based.

The transition towards LED based lighting technologies, referred as *LEDification* [9, 12], is predicted to come in two waves [17]. The first wave will be a replacement period. The main focus will be to bring fast and simple LED technology in form of light to the consumers in order to remove the inefficient old lighting technologies. The second wave will include more intelligence to the light fixtures, transforming the lights from a simple light sources to connected nodes within an infrastructure of interconnected lights, what is already crystalizing with *The Connected Lighting Alliance*. This second phase is predicted to be a revolution, transforming the lighting infrastructure into a crucial element of the future smart houses and in the internet-of-things era [13]. Therefore LED lighting will bring not only efficient lighting, but also interconnect light fixtures. This is similar to what happened before, in the late 1800s, when a single invention brought simultaneously light and electricity to our homes [24].

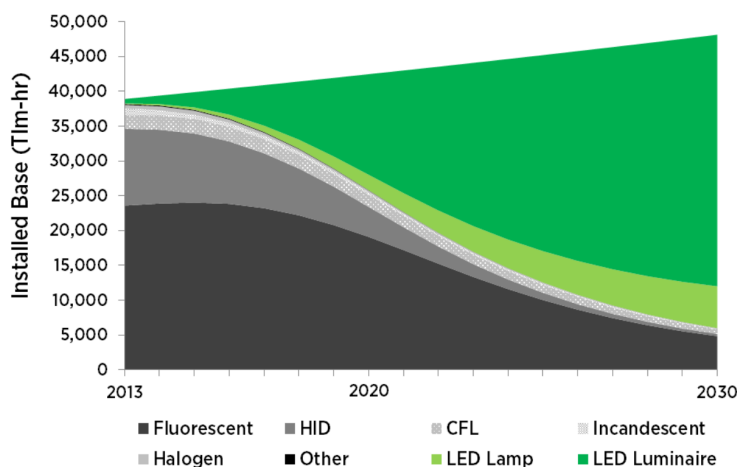


Figure 1.4: U.S. Lighting Service Forecast, 2013 to 2030 [22].

LED lighting from the lab to our homes

During the last decade, the lighting industry has been in a rush to bring LED light to the market, making *LEDification* a reality. Initially LED lighting was only used

for decorative lights and with the advance of the LED technology with higher efficiency devices, they started to be applied in general lighting applications. With the progression of efficiency of the LEDs, in May 2008 the U.S. Department of Energy (DOE) established the Bright Tomorrow Lighting Prize (L-Prize) [2, 27] competition in order to encourage the industry to spur development of ultra-efficient SSL products awarded with US\$10 million cash prize. In the L-Prize competition the industry was challenged to develop replacement technologies for two most widely used and inefficient bulbs: *A19 60W* incandescent lamps and *PAR38* halogen lamps.

On September 2009, Philips Lighting North America became the first to submit LED lamps in the category to replace the standard 60W screw-in lamps, becoming the winner in that category [3, 32]; the other category is still empty. Only three years later, in 2012, Philips had already covered the whole range of incandescent bulbs up to 100W [17]. Today in 2015, all these replacement lamps are available in almost all of the supermarkets and retail shops, although they are not yet adopted as the preferred solution by consumers.

Consumer adoption of the new LED based lamps

Despite of the advantages of LED lighting, end consumers are still very reluctant to make the change towards SSL products due to their elevated price [11, 29]. Currently a 100W LED replacement costs between \$20 - \$40 compared to less than \$3 for an halogen incandescent. The reason for this is because the majority of end consumers do not yet understand that even incandescent lamps are cheaper, LED replacements save money over the life time of the product due to energy savings. With the help of Table 1.1 we can easily demonstrate this statement.

The *Lumen cost of owner ship*⁴ for incandescent technologies is below 60 $klm/€$ and for LED technologies is easily above 200 $klm/€$. Translating these figures to total costs⁵, it is estimated that in a productive year (around 2000h), for a 25m² office space⁶, costs of lighting would be above 420€ for incandescent lamps and below 140€ for LED lamps. It is true that linear fluorescent and (High-Intensity Discharge Sodium) (HID-SON) represent the best option regarding costs below 80€, but the projected performance gains in efficacy, color quality and light distribution point that LED technology will become the best choice [8]. HID-SON lamps are out of discussion since they have a very poor CRI (25) what does not allow to properly recognise colors. Based on the aforementioned facts is predicted that LED is going to be the future lighting technology [22, 28], but still the industry has found the manner to motivate the end consumers to buy LED lamps as their first choice [29].

⁴Lumen cost of owner ship is expressed in $klm/€$ indicating how many lumens you can produce per € during thousand hours. Using this metric the different light technologies can be compared independently of the lamp power consumption.

⁵Lamp amortization are included in the costs

⁶Recommended illumination for productive office spaces is 500lm/m²

Table 1.1: Characteristics for different lamp technologies (winter 2015).

	Units	<i>Incandescent</i>	<i>Halogen</i>	<i>Cold-White Fluorescent</i>	<i>Warm-White Fluorescent</i>	<i>Compact Fluorescent</i>	<i>HDI SON</i>	<i>Retrofit LED Budget</i>	<i>Retrofit LED Dimmable</i>	<i>Retrofit LED</i>	<i>Retrofit Tube LED</i>
Power	W	100	53	36	39	11	70	10	13	5	10.5
Flux	lm	1203	845	3100	3100	600	5600	600	1055	350	950
Efficacy	lm/W	14.3	14.42	57.14	57.14	55	80	60	81.15	70	90.5
Color Temperature	K	2700	2800	4000	3000	2700	2000	2700	2700	3000	3000
Color Rendering Index		100	100	85	85	82	25	87	80	80	85
Lifespan	h	1000	2000	20000	24000	15000	28000	2500	25000	15000	50000
Retail price	$€$	1	3	5.6	4.8	8.78	14.26	4.5	37.1	17	43
Lumen cost of ownership	$klmh/€$	48	59	348	324	186	324	233	229	182	281
Cost of ownership	$€/kh$	25	14.2	8.9	9.6	3.2	17.3	2.6	4.6	3.3	3.4
Cost for a $20m^2$ office	$€/kh$	260	210	36	39	67	39	54	55	69	43

Figure 1.5: 900 lumens
LED light bulb.



Making SSL attractive for the consumers. What has to be done?

Two main factors have been identified to help the adoption of LED as the preferred lighting solution for consumers [29]. First, reducing the end product price; second, bringing more value than traditional lighting sources. Certainly, as previously mentioned, LED light bulbs already bring more value compared to the old light bulbs. They are much more efficient, almost one order of magnitude lower in power consumption, and have a longer lifetime, easily twenty times more operating hours. However, that is not yet well explained to be a valuable argument for the end consumers. New *smart* bulbs concepts are starting to populate the market, such as LIFX, Philips Hue and Easybulb, offering color tuning, light output dimming, remote control and other wireless services. This position SSL in line with the current trend of the *internet-of-things* [6, 25, 30], for the specific lighting case, the *internet-of-lights* [13, 14]. Moreover, LED lighting is also growing the luminaries industry, bringing more and more popular products where the light fixture directly embeds the LEDs. Providing products which benefit from design advantages enabled by the small form factors of the LEDs. As a matter of fact the *U.S Department of Energy* (U.S.DoE) estimates that LED luminaries will be the big player in the lighting market, shown in the graph of Figure 1.4.

Generally the market penetration of SSL is identified to be influenced by three main factors:

- End lamp/luminaire price
- Intelligence: Interactivity, connectivity and controllability
- Light fixture size: Luminaire design, shape and application

Understanding the LED lamp assembly

It is necessary to describe the different elements in an LED lamp in order to relate this three factors with current LED bulbs and understand the challenges in their

development. The system can be grouped in six main elements described below and shown in the Figure 1.7.

LED From its acronym, a *Light-Emitting Diode* is a two-lead semiconductor device that generates light when a current flows through it. Internally light is produced by the electroluminescence effect, where an electron recombines with an electron-hole releasing energy in form of photons. The color of the light is determined by the energy band gap of the semiconductor. The mounted LEDs in the lamp will determine light color, power, efficiency and load characteristics.

Optics Optical device that mixes and distributes the light from the LED to the illuminated space.

Driver Electronic circuit designed to transform the electrical power of the input source to properly supply the LEDs. LED drivers are considered voltage-to-current ($v-i$) power supplies. The driver control the current through the load, hence the light output, being the active part of the system that essentially controls the lamp.

Heat sink Mechanical element that acts as a passive heat exchanger to cool the hot elements inside the lamp by dissipating the heat into the surrounding medium. In the LED bulb the energy that is not transformed to light becomes heat and must be extracted from inside the lamp. The hot spots areas in the lamp are the LEDs chips and some of the driver components.

Body assembly Mechanical element that hold alls the different subsystems in one single device. In many cases the heat sink is also served for that propose.

Connector Mechanical element that provides connection with the energy source. The most popular one is the Edison connector present in all screw-in lamps. There are many other popular ones, such as GU10, MR16, MR11, coming from the halogen multifaceted reflector bulbs, or the 2-pin connector of the fluorescent tubes.

In many cases, the standardized connectors restrict the mechanical design of the lamp. Their old-fashioned design is not optimal for the new lamps.

LED lamps breaking down the costs

With an understanding of the different elements of a LED lamp we can relate them back to the three factors that influence the market penetration previously mentioned. First, the price of the lamps. Figure 1.6a shows the cost breakdown for different lighting applications. The three main elements Driver, LED package and Thermal/Mechanical/Electrical interface⁷ share almost equally the costs of the lamp, and it is predicted to be similar or even a bit better distributed as shown in the

⁷The Thermal/Mechanical/Electrical group comprises the heat sink, socket connector and *Printed circuit Boards* (PCBs) that interconnect and mount the input socket, LEDs and driver.

forecast of Figure 1.6b. Based on these figures, it is evident that in order to achieve the predicted cost reduction, one half for 2020, actions have to be started at the system level, ensuring an equal research and development effort for all elements in the lamp.

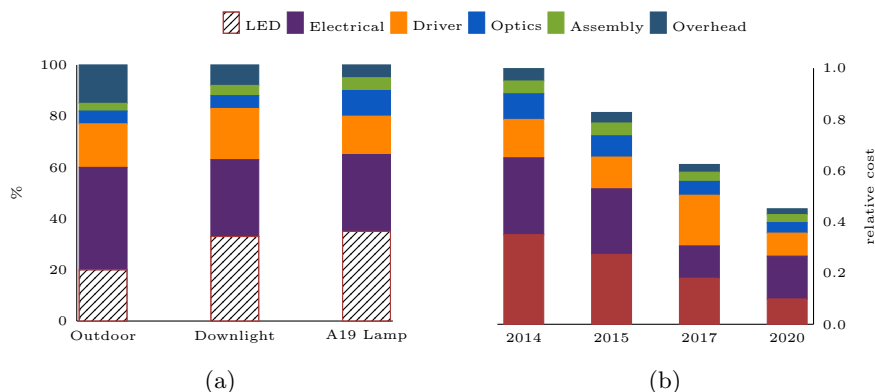


Figure 1.6: *Left*-Comparison of cost breakdown for different lighting applications; *right* - Cost breakdown projection for a typical A19 replacement lamp

Source: DOE SSL Roundtable and Workshop attendees

The LEDs or LED package⁸ are in continuous evolution in order to fit the requirements of the luminaire manufacturers and driver requirements in terms of price, efficacy and package. Innovations are on the market with three available technologies based on current capability of the dies: low, mid and high power range. The different offer in chip packages brings more flexibility at the system level in terms of optical design, luminaire light projection, color, and driver design. However full potential of the reduced profile of the LED has not yet been explored in regard to the luminaire design. Further research at the die level will improve the reliability of manufacturing process, and the efficiency needed to reduce the costs of the lamps. It is, however, in the better use of the small size of the LED what will provide more value for the future lamp designs and competitions like *Next Generation Luminaires* (<http://www.ngldc.org/>) challenge the industry to innovate in that field.

The Mechanical/Thermal/Electrical group - comprising heat sink, socket connector, PCBs and *Electromagnetic Interference* (EMI) filters - still plays a dominant role in the design of the lamp. The heat sink and the connector are in many cases the body of the lamp where the heat sink and assemblies form the entire lamp. Traditional sockets, which are not design friendly, are currently kept in order to provide a fast transition for the current first wave of the *LEDification*, the replacement period. Replacement lamps are also known as *retrofit*⁹ lamps. The current offer of *retrofitted*

⁸Electronic part composed by an assembly of LEDs connected in series or parallel and mounted on a single substrate

⁹Adding the new LED technology to the older light bulb systems. In that way the end user can

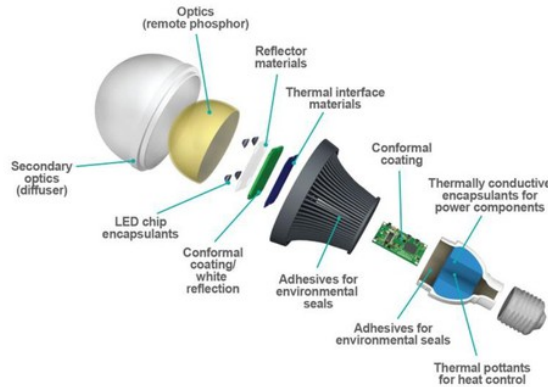


Figure 1.7: Exploded vision of an LED light bulb.

LED bulbs prove the successes achieved in that area. Nowadays it is already possible to find a replacement lamp for almost all old lamps. However *retrofitted* lamps will have only a small market share as predicted in the lighting forecast of Figure 1.4. That is why innovations in the Mechanical/Thermal/Electrical group will be necessary for the coming light fixtures, to evolve and reinvent the future LED luminaires, where the small size, the low profile and the colored light of the LEDs will play an relevant role.

The driver, the heart and the brain of the LED lamp

The LED driver is the circuit that transforms raw energy from a power source and properly delivers it to the LED load. From the power management standpoint power a LED load is a trivial task, however the different requirements of SSL products make the design of them a complex task. The initial design goals in the driver design were: manufacturing cost, power quality, light quality. Reducing manufacturing costs can enable to decrease the lamp prices to the entry point for the consumers, while fulfilling the power quality fixed by the legislation and keeping the adequate light quality to do not perturb the human eye [31].

More recently two other factors are becoming more relevant in the driver: miniaturization and *smartability*¹⁰. Currently the volume of the drivers is limited by the old lamp shapes in order to provide retrofit solutions. Although, in many cases the shape and look of the lamps has been modified in order to relax the requirements in terms of miniaturization for the driver. Therefore further reduction of the driver volume will probably enable higher freedom in the lamp design. On the other hand, the

directly replace an old lamp or tube by a LED one without needing to make any change in the current installation.

¹⁰Provide the abilities/ functionalities to a device in order to be smart

future connected lamps [13] (or smart lamps) will require control and connectivity, what challenges the driver to provide multiple color channels and power management for the added control circuitry such as sensors, actuators, communication interfaces and μ Controllers.

At the same time the driver is, with no doubt, has an *special* role in the entire lamp. It is referred to as *special* because it is the only element of the lamp that plays a role in each of the three factors of influence for market penetration: Intelligence, Design and Costs. First, the driver is the only element that brings active functionality to the lamp, hence the only one that can incorporate the control and interactivity to the system. Second, its volume and its location influence the design of the lamp. The closer the driver to the LEDs is, the better the controllability and the intelligence of the system becomes. Finally, the manufacturing costs, what up-to-now has been the main research goal for LED drivers.

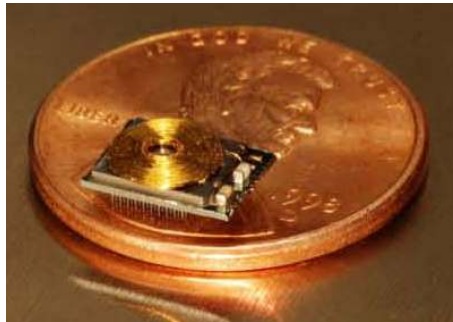


Figure 1.8: Power System in a Package buck converter.

1.1 Research goal and objectives

Looking at the current driver designs, we can say that the initial driving forces in driver design, cost, power and light quality, found effective solutions based on discrete components. However discrete drivers cannot easily satisfy the design in terms of miniaturization and *smartability*. Literally, the implications of these two concepts are opposing, providing smart functions to the driver requires to add more components, therefore increasing the volume/area, while miniaturization requires to make the driver smaller. Actually, such dilemma has its analogy in the mobile phone industry. After the first generations of mobile phones, the requirements in terms of functionalities for the current smart-phones could only had been satisfied by a *System-On-Chip* (SoC), where the maximum number of functionalities were integrated in a single IC package. Based on smart-phone analogy, **this dissertation brings the research for the future highly miniaturized LED drivers in the context of *Power Systems on-Chip/in-Package* (PSoC/PSiP), where**

miniaturization and integration of functionalities can be easily achieved.

This thesis only addressed the topic from the standpoint of view of *dc-dc* LED drivers, and not including the *ac-dc* architectures.

The work done in this thesis started motivated and founded by the **Power Systems Group** from **Philips Research** in The Netherlands. The goal was to explore the future possibilities within the scope of LED drivers, with the aim to identify new architectures that enable higher power density and integrability. First archiving higher power density, which is generally one of the main targets of any research in power electronics, since it helps in the miniaturization of the power supplies. Second integrability, which indeed was actually the rational for the research topic, therefore, into looking at the precedents of highly integrated power supplies we landed to the research question that triggered this dissertation: *Could we drive a high brightness LED with a just switched capacitor converter?* The answer is no, at least not in an efficient way that makes a driver feasible. Instead, we found that a switched capacitor converter (SCC) combined with an inductor can be a suitable architecture for an integrable LED driver with high efficiency, what we defined as *Hybrid-Switched Capacitor Converter*, abbreviated H-SCC. Subsequently, the other research objectives appeared, thus a converter model and design methodology were necessary to implement a LED driver based on the new topology.

Besides the aforementioned research objectives, and owing to the fact that this research was founded by a private research institution (**Philips Research, The Netherlands**), other goals were settled in their interest of protecting all the Intellectual Property (IP) generated during the research. A total of 7 patents were filled, 4 of the already published, with the aim to cover the maximum space with respect of the H-SCC topic, generating driver architectures and control technics for these converters that are beyond the scope of this dissertation. The list of the filled patents is included at the end of the thesis.

1.1.1 Thesis outline

The two first chapters are devoted to the power train of a LED driver. Chapter 2 gives an overview of the requirements of LED load and the different current LED drivers available, confronting their pros and cons. The chapter closes with a *hybrid* solution combining the two current SMPS technologies, inductive and capacitive. A new topology is defined that can meet the requirements in terms of power delivery and integration. Subsequently Chapter 3, is purely devoted in the description of the new topology, referred as *Hybrid Switched Capacitor Converter*. For a clear understanding of the topology this chapter, revisits the main concepts of switched capacitor converters in order to afterwards clearly describe the new H-SCC. Figures with respect of power density and integrability are given in this chapter, and it closes presenting the LED driver topology used in the experimental setup.

Chapter 4 is devoted to the modeling of the new converter. Owing to the fact that

switched capacitor converters are by nature lossy converters and they have a large number of components, capacitor and switches, it is essential to have a model to assess in the converter design. The modeling methodology is first developed for a single output converter, and its application is exemplified by solving a converter. The methodology is also extended for multiple output converters, providing a complete modeling framework to solve new architectures based in switched capacitor converters. Chapter 5 validates the new model for both cases single output and multiple outputs. The new model is tested using both transient circuit simulations and an experimental setup, at the same time, the model is also confronted with the previous model.

Chapter 6, presents an experimental LED driver circuit assembled in a *printed-circuit-board* with discrete components. The driver is designed for a 24V input, low voltage standard for track lighting defined by the e-Merge Alliance, with two outputs. The main output delivers 12V at 1A for a LED string load with 89% efficiency, and a peak efficiency of 95% at 600mA. The second output delivers 4V at 200mA and is designated to supply auxiliary control circuits of the driver. Experimental results are presented from the driver. The full design process is provided, including the design of the power rail and the close loop board. The driver is benchmark with respect to a buck converter, in terms of power density and switch area utilization, on a theoretical basis.

Chapter 7, summarizes the conclusions. The thesis contributions are listed and confronted with their relevance, recommendations for future research guides are given.

Bibliography

- [1] Philips Research Library. URL <http://www.hightechcampus.com/facilities/philips-research-library>.
- [2] Bright Tomorrow Lighting Prize (L-Prize) competition, 2007. URL <http://www.lightingprize.org/>.
- [3] Philips award winning led bulb, 2007. URL <http://www.usa.lighting.philips.com/lightcommunity/trends/l-prize/home.wpd>.
- [4] The Nobel Prize in Physics 2014 Isamu Akasaki, Hiroshi Amano, Shuji Nakamura, October 2014. URL http://www.nobelprize.org/nobel_prizes/physics/laureates/2014/press.html. [Online; posted 07-October-2014].
- [5] Isamu Akasaki and Hiroshi Amano. Widegap column-iii nitride semiconductors for uv/blue light emitting devices. *Journal of the Electrochemical Society*, 141 (8):2266–2271, 1994.

- [6] Luigi Atzori, Antonio Iera, and Giacomo Morabito. The internet of things: A survey. *Computer networks*, 54(15):2787–2805, 2010.
- [7] A Bouwknecht. Compact fluorescent lamps. *Journal of the Illuminating Engineering Society*, 11(4):204–212, 1982.
- [8] M.F. Braga, F.J. Nogueira, M.F.C. Campos, L.H.B. Gouveia, and H.A.C. Braga. A comparative study regarding linear fluorescent and led lamps for indoor lighting. In *Industry Applications (INDUSCON), 2014 11th IEEE/IAS International Conference on*, pages 1–7, Dec 2014. doi: 10.1109/INDUSCON.2014.7059469.
- [9] MH Crawford, JJ Wierer, AJ Fischer, GT Wang, DD Koleske, GS Subramania, ME Coltrin, RF Karlicek Jr, and JY Tsao. Solid-state lighting: Toward smart and ultraefficient materials, devices, lamps, and systems. *Photonics, Volume 3: Photonics Technology and Instrumentation*, 3, 2015.
- [10] EPA. NEXT GENERATION LIGHTING PROGRAMS: Opportunities to Advance Efficient Lighting for a Cleaner Environment. Technical report, U.S. Environmental Protection Agency, 2011.
- [11] Jim Greig. LED technology accepted but adoption remains slow, January 2016. URL <http://lordelectronicmaterials.com/tag/jim-greig/>. [Online; posted 15-January-2015].
- [12] Christoph Hammerschmidt. Digitisation, ledification pave path to smart lighting, Mar 2013. URL http://www.eetasia.com/ART_8800682394_480700_NT_2a93ad1c.HTM. [Online; posted 07-March-2013].
- [13] Gerard Harbers and Steve Landau. The internet of lights. In *LED professional Symposium - (LpS), 2014*, Oct 2014.
- [14] Gerard Harbers and Sanjay Manney. 'Internet of Lights' Meets Industrial Internet of Things, November 2014. URL <http://www.photonics.com/Article.aspx?AID=56860>. [Online; posted 15-January-2015].
- [15] GE Inman. Characteristics of fluorescent lamps. *Trans. Illum. Eng. Soc*, 34:65, 1939.
- [16] T. Komine and M. Nakagawa. Fundamental analysis for visible-light communication system using led lights. *Consumer Electronics, IEEE Transactions on*, 50(1):100–107, Feb 2004. ISSN 0098-3063. doi: 10.1109/TCE.2004.1277847.
- [17] Coen Liedenbaum. 53.1: Invited paper: Drivers in the adoption speed of solid state lighting. In *SID Symposium Digest of Technical Papers*, volume 44, pages 731–732. Wiley Online Library, 2013.

- [18] S. Nakamura, T. Mukai, and M. Senoh. Candela-class high-brightness In-GaN/AlGaIn double-heterostructure blue-light-emitting diodes. *Applied Physics Letters*, 64:1687–1689, March 1994. doi: 10.1063/1.111832.
- [19] N. Narendran and Y. Gu. Life of led-based white light sources. *Display Technology, Journal of*, 1(1):167–171, Sept 2005. ISSN 1551-319X. doi: 10.1109/JDT.2005.852510.
- [20] Yukio Narukawa, Isamu Niki, Kunihiro Izuno, Motokazu Yamada, Yoshinori Murazaki, and Takashi Mukai. Phosphor-conversion white light emitting diode using ingan near-ultraviolet chip. *Japanese journal of applied physics*, 41(4A): L371, 2002.
- [21] Navigant. Adoption of Light-Emitting Diodes in Common Lighting Applications. Technical report, U.S. Department of Energy, 2013.
- [22] Inc Navigant Consulting. Energy Savings Forecast of Solid-State Lighting in General Illumination Applications. Technical report, U.S. Department of Energy, 2014.
- [23] AB O’Day and BF Cissell. Fluorescent lamps and their application. *Trans. Illum. Eng. Soc*, 34:1165, 1939.
- [24] New York Independent System Operator. Bulk Electricity Grid Beginnings. 2014. URL http://www.pearlstreetinc.com/NYISO_bulk_elect_beginnings.pdf.
- [25] R. Qiu and Zhijun Zhang. Design of enterprise web servers in support of instant information retrievals. In *Systems, Man and Cybernetics, 2003. IEEE International Conference on*, volume 3, pages 2661–2666 vol.3, Oct 2003. doi: 10.1109/ICSMC.2003.1244286.
- [26] Y. Tanaka, S. Haruyama, and M. Nakagawa. Wireless optical transmissions with white colored led for wireless home links. In *Personal, Indoor and Mobile Radio Communications, 2000. PIMRC 2000. The 11th IEEE International Symposium on*, volume 2, pages 1325–1329 vol.2, 2000. doi: 10.1109/PIMRC.2000.881634.
- [27] Eric A. Taub and Leora Broydo Vestel. Build a Better Bulb for a \$10 Million Prize, Sep 2009. URL <http://www.nytimes.com/2009/09/25/technology/25bulb.html>. [Online; published 24-September-2009].
- [28] E. Uken, G. Bevan, and R. Smith. Led tube retrofits for fluorescent lighting in offices. In *Industrial and Commercial Use of Energy Conference (ICUE), 2013 Proceedings of the 10th*, pages 1–4, Aug 2013.
- [29] Olivier Vogler, Dominik Wee, and Florian Wunderlich. Led at the crossroads: Scenic route or expressway? McKinsey on Semiconductors, 2011.
- [30] Rolf H Weber and Romana Weber. *Internet of Things*. Springer, 2010.

- [31] A. Wilkins, J. Veitch, and B. Lehman. Led lighting flicker and potential health concerns: Ieee standard par1789 update. In *Energy Conversion Congress and Exposition (ECCE), 2010 IEEE*, pages 171–178, Sept 2010. doi: 10.1109/ECCE.2010.5618050.
- [32] Maury Wright. Philips plans consumer launch of 1 prize-winning led lamp. URL <http://www.ledsmagazine.com/articles/2012/04/philips-plans-consumer-launch-of-1-prize-winning-led-lamp.html>.

Chapter 2

LED load and driver trichologies

This chapter starts with an overview of the LED characteristics as a load to give an understanding of the necessary requirements of a LED driver. Subsequently, an overview for the current three driver technologies is given. Linear, switched inductor and switched capacitor, each technology is described, giving the necessary theoretical fundamentals of energy conversion to understand their advantages and limitations. With the overview for each technology the rational towards *hybrid* converter is given, settling the bases of the converter topology used in this dissertation.

2.1 The LED as a load

A LED is as its acronym stands for a *Light Emitting Diode*. Therefore a LED is a non-linear load with the well-known *voltage-current* ($v - i$) curve of a diode shown in Figure 2.1. For voltages below the *forward voltage* (v_f), practically no current flows through it and the LED behaves as an open circuit. For voltages above v_f the curve becomes very steep and the current increases dramatically with respect to the voltage, thus the LED behaves similar to a short circuit. The LED has to be supplied at an specific point P in order to provide a desired light output as shown in Figure 2.1, depending on the bias current light colour and intensity will vary. Due to the steepness in the $v - i$ curve, the practical way to bias a LED is supplying it by a *dc-current*. Owing to the fact that the bast majority of energy sources supply voltage in order two properly supply an LED it is necessary to select a circuits that converts voltage to current.

The characteristics of an LED subjected to variations due to manufacturing toler-

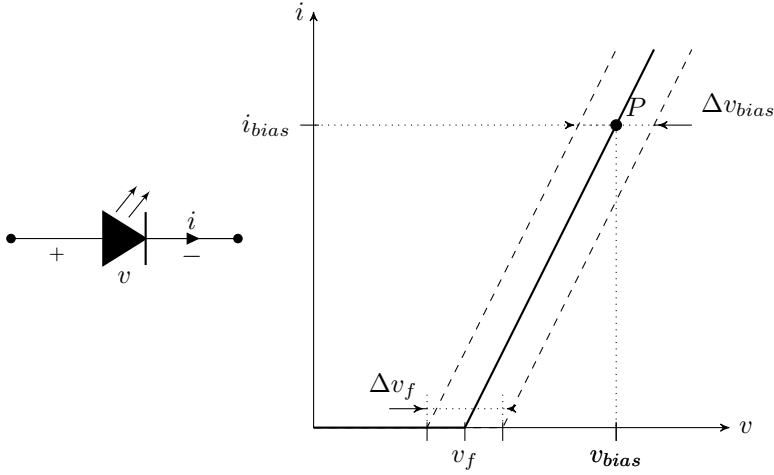


Figure 2.1: Idealized LED voltage-current characteristic, with the *forward voltage* v_f identified and a projection of the *bias point* P

ances and second order effects at thermal deviations and ageing. Therefore the $i - v$ characteristics is not static and requires the driver to adapt to the load in order to keep the desired light output. The variations in $v - i$ curve can be associated to three main effects. First, v_f has a negative dependence with the temperature, drooping its values as the pn -junction temperature increases. Second, the LED has an aging factor which derates the light output over time, and which has to be adjusted by changing the bias point. And third, during production LEDs will vary in colour, flux, and forward voltage; even for products from the same batch. The manufacturers have reduced the tolerances between devices by binning ¹, nevertheless after binning, the parts are still subjected to some tolerances. For example Table 2.1 shows the tolerances in forward voltages for 4 different commercial devices, observing a deviation around $\pm 10\%$.

Figure 2.1 graphically presents how the tolerances in v_f produce a displacement in the $v - i$ characteristic, which require to modify the v_{bias} within a certain range Δv_{bias} in order to keep i_{bias} constant. Despite the variations associated to the load, the driver has at the same time to cope with perturbations and tolerances subjected to the energy supply. The driver has to provide line regulation for static deviations and immunity to high frequency perturbations, without affecting the load. Currently there are three different driver families used to implement LED drivers that are presented in the subsequent sections.

¹Quality control performed at LED production line, where each LED is individual tested and sorted in groups (bins) that have the same electrical and lighting characteristics.

Table 2.1: Electrical characteristics of different commercial LEDs

Model	Mnf.	v_f [V]			i_f	Lum.	CCT
		<i>min.</i>	<i>typ.</i>	<i>max.</i>	[mA]	[lm]	
L130	Lumileds	5.8	6.1	6.6	120	92	4000K
CLA1A	XB-D	-	2.9	3.5	350	122	5000K
NF2L757GR	Nichia	-	6.32	7.1	150	124	3000K
ASMT – M	Avago	2.8	3.2	3.5	120	350	4000K

2.2 Linear Regulators

Linear drivers place a shunt element between the source and the load(*i.e* the LED). The shunt element limits the LED current providing the necessary voltage droop between the source and the load. The excess of voltage between the source and the load is dissipated in the series element, literally burned in form of heat; therefore these drivers become very inefficient if the LED voltage is not close to the source. Other limitation is that linear drivers only provide step-down conversion, thus they cannot work when the voltage at the load is higher than the input supply.


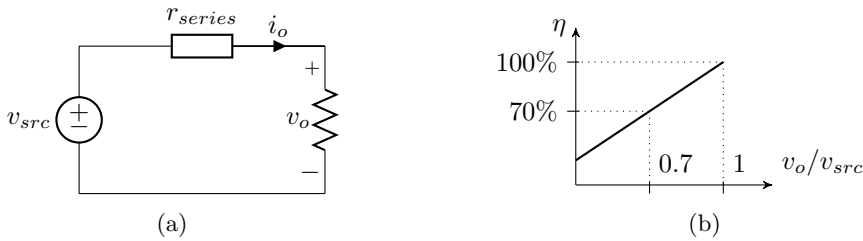


Figure 2.2: Linear driver, *left*- schematic; *right*- conversion ratio vs. efficiency characteristics

The circuit of the Figure 2.2a shows the schematic of a linear driver. The shunt element can be implemented with just a resistor or with an active device. The first will impose a current depending on the input source and the load conditions; the second will provide regulation of the bias point for variations in the source and in the load. Linear drivers are very simple to implement with few components as shown in the schematic of Figure 2.3. They have a very low costs and take almost no area, being indeed the perfect solution for integration.

The plotted graph in Figure 2.2b presents the variation of the driver efficiency with

Figure 2.3: Low-dropout (LDO) LED driver regulator. The load current i_o is fixed by the voltage v_{ref} , despite perturbations in v_{src} and the diode voltage.

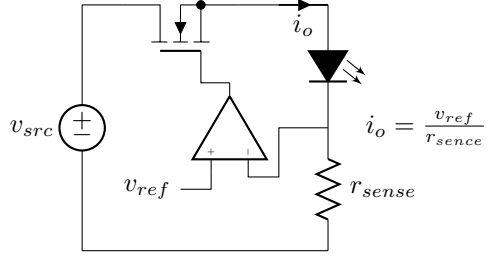

respect to the conversion ration m .

$$m = \frac{v_o}{v_{src}}. \quad (2.1)$$

The efficiency of the driver is the ratio between the input and output power, thus

$$\eta = \frac{P_o}{P_i} = \frac{v_o i_o}{v_{src} i_o} = \frac{v_o}{v_{src}} = m, \quad (2.2)$$

which is indeed equal to the conversion ratio. Therefore in a linear regulator the efficiency is subjected to the conversion ratio of the converter, the higher the difference between input and output the lower the efficiency. For instance assuming a minimum efficiency of 80%, the maximum accepted conversion ratio is 0.8.

2.3 Inductor Based Converters

Inductor Based Converters (IBCs) are switched mode power supplies (SMPS) ² that employ magnetic passive elements, i.e. inductors and transformers, to store energy and provide efficient electrical power conversion. Therefore the magnetic component is the main passive element in the converter, allowing to process electrical energy by storing in in form of a magnetic field.

IBCs provide step-up and step-down conversion for large dynamic ranges while keeping the efficiency very high. On top of their power conversion capabilities, they can also provide galvanic isolation, which in some mains supplied applications is compulsory in order to guarantee the safety of the users against electrical hazards. These characteristics place these drivers as the preferred solution for the LED industry now a days. Figure 2.4a shows a *Buck* converter, being it one of the most popular implementations for LED drivers in *dc-dc* applications. Figure 2.4b presents the regulation characteristic of a generic inductor based converter. As shown, the theoretical efficiency of these converters is 100% for all the conversion ratio range. In practice, the parasitics in the components make the efficiency to drop with fluctuations with respect to the point of operation of the converter.

²Electronic power supply that provides efficient electric power conversion by commuting between different circuit configurations (modes).

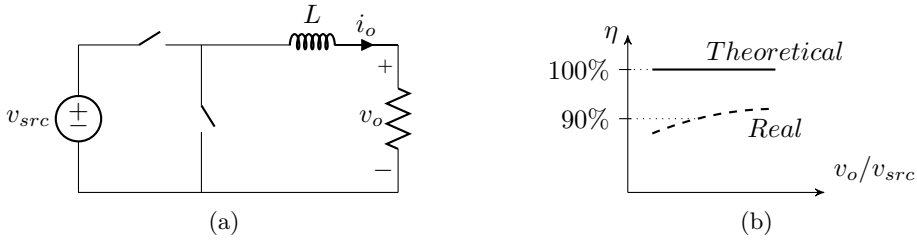


Figure 2.4: Inductor based converter, *left* - buck converter schematic; *right* - conversion ratio *vs.* efficiency curve comparing the *theoretical* and a *practical* limit.

The main disadvantage is the use of magnetic components due to their volume and integrability. In practice, inductors dominate the entire volume of the LED drivers as shown in Figure 2.5. At the same time the three-dimensional nature of these components limit their integrability, specially in standard processes, current research in the field is providing with solutions for power inductors, however they are far to be mature enough for commercial uses.

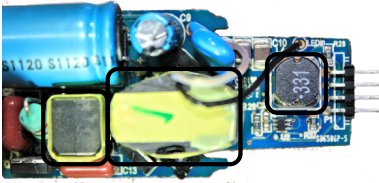


Figure 2.5: Magnetic components marked with a black square in a mains connected LED driver. These components dominate the volume of the converter.

From the standpoint of view of the switches technology, inductive converters bring yet another disadvantage with respect of the integration of the switches. Generally, the switches in an inductive converter have to fully block the highest operational voltage of the converter, from the input or the output voltage. Depending on the application, the range is from tens to a few hundreds of volts. Using high voltage devices has three main drawbacks: First, the losses in the devices scale quadratically with the voltage stress. Second, bad switching performances, because high voltage devices are less efficient and slower switching. Third, the standard VLSI technologies do not offer these *high voltage* (HV) devices and the VLSI technologies that offer them are less performance and more expensive than the dedicated discrete technologies.

2.3.1 Energy transfer in switched inductor converters

Inductor based converter are ideally lossless, since the transfer of energy between a voltage source and an inductor is an adiabatic process, which can be demonstrated using the circuit of Figure 2.6.

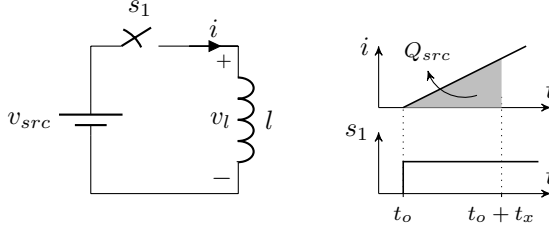


Figure 2.6: Energy transfer in an inductor.

On the one hand, the energy stored in an inductor is given by

$$E_l = \frac{1}{2} l i^2. \quad (2.3)$$

The current flowing in the inductor after switch s_1 is closed is given by

$$i(t) = \frac{1}{l} \int v_l dt = \frac{v_{src}}{l} t. \quad (2.4)$$

Substituting (2.4) into (2.3), we can obtain the energy stored in the inductor after closing s_1 during the time t_x , which results in

$$E_{l,t_x} = \frac{v_{src}^2 t_x^2}{2l}. \quad (2.5)$$

On the other hand, the energy delivered by the energy source v_{src} is given

$$E_{src} = v_{src} q_{src}. \quad (2.6)$$

The charge q_{src} delivered by the energy source after closing s_1 during a time t_x can be obtained by integrating the inductor current (2.4), between t_o and $t_o + t_x$ as

$$q_{src} = \int_{t_o}^{t_o+t_x} i(t) dt = \frac{v_{src}}{2l} t_x^2. \quad (2.7)$$

—Therefore substituting (2.7) into (2.6) gives the energy deliver by the source, which gives

$$E_{src,t_x} = \frac{v_{src}^2 t_x^2}{2l}. \quad (2.8)$$

The energy lost while transferring energy between the source and the inductor, is the difference between the energy deliver from the source (2.8) and the energy stored in the inductor (2.5), which results in

$$E_{loss} = E_{src,t_x} - E_{l,t_x} = \frac{v_{src}^2 t_x^2}{2l} - \frac{v_{src}^2 t_x^2}{2l} = 0. \quad (2.9)$$

In conclusion, transferring energy between a voltage source and inductor is lossless, and that is why generally inductor based converters achieve very high conversion efficiencies. Nevertheless the parasitics in the components make these converters to do not achieve 100% efficiencies.

2.4 Capacitor Based Converters

Switched Capacitor Converters (SCCs) are SMPS composed only of switches and capacitors. SCC were initially used for voltage multiplication [2, 3, 9] and more recently in applications that need voltage regulation as well [7]. Compared to inductor based converters, the absence of magnetic elements places them in a good position for high density power systems and integrated solutions, such as Power-System-in-Package (PSiP) or Power-System-on-Chip (PSoC).

SCCs have a fixed ratio of conversion between the input and the output determined by the topology. The output voltage of the converter under no load conditions is defined as the *target voltage* (v_t). The converter performs at high efficiency when the load is supplied close to the target voltage. Similar to the linear drivers, the efficiency of the converter drops as the difference between the load and target voltage increases. The converter cannot supply a voltage above to the target voltage. Figure 2.7a shows a step-down converter with a conversion ratio of one half, thus a 2:1 SCC, and Figure 2.7b shows the efficiency with respect of the conversion ratio. As the ratio between the input and the output voltages becomes smaller than one-half the efficiency drops linearly, similar like in a linear regulator. For values above one-half the converter is not operative. A common practice to extend the regulation margins of these converters is to have topologies with a *gear box* that provides multiple ratios of conversion [6, 8], which are also know as multi-target voltages converters.

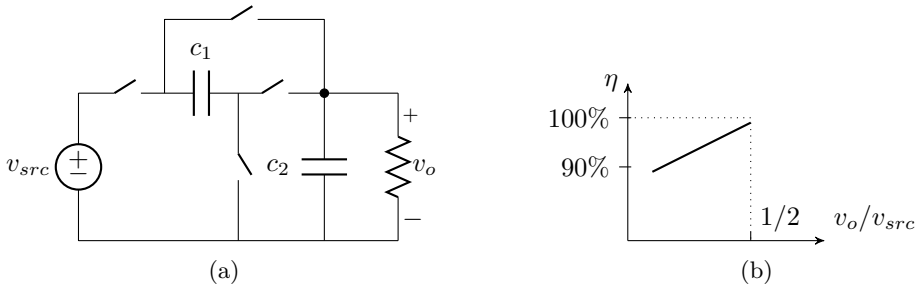


Figure 2.7: Switched capacitor converter, *left* - 2:1 converter schematic; *right* - conversion ratio *vs.* efficiency curve for of a generic multiple conversion ration stage

The main limitation of SCCs is that they cannot directly provide the voltage-to-current regulation, necessary feature of the LED driver. Nevertheless by indirect means the output current can be controlled adding a linear regulator in series with the converter output, compromising the converter efficiency. Such approach is very popular driver for backlighting LEDs in battery supplied devices, where high integrability was more relevant than the power efficiency. The backlighting LED driver solution uses a multi-target SCC converter the battery voltage to a voltage above the LED strings, and by means of linear drivers the output current is adjusted

to properly bias the LEDs. Adopting that architecture for general lighting could be a solution, however when scaling the voltages and currents to the requirements of general lighting applications the resulting driver would be infeasible and inefficient.

From the standpoint view of integration the main advantage of these converters is the use no inductors. Integrated capacitors have a better energy density than integrated inductors. The mechanical structure of the capacitors, a stack of metal-isolator-metal, is much easier to replicate on a small scale. With respect to the switches technology, SCCs have the advantage of dividing the operational voltages of the converter among the different components, thus reducing the voltage stress in the switches and capacitors. Actually, reducing the voltages in the converter has different advantages. First, capacitors have higher energy density. Second, lower voltage switches have better switching performances and lower associated losses. Finally, lower voltage devices require less silicon area and have a larger offer in the standard very large integration scale (VLSI) processes.

2.4.1 Energy transfer in switched capacitor converters

SCCs are by nature lossy, since the transfer of energy between a voltage and a capacitor is a non-adiabatic process, which can be demonstrated using the circuit of Figure 2.8.

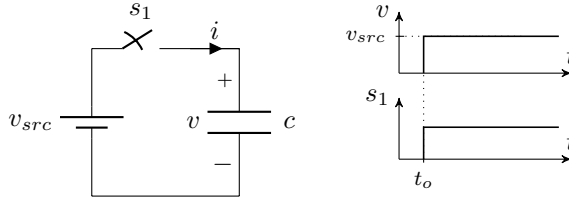


Figure 2.8: Energy transfer in a capacitor.

On the one hand, the energy stored in a capacitor is given by

$$E_c = \frac{1}{2} c v^2. \quad (2.10)$$

After closing the switch at t_o , the capacitor is charged at v_{src} . The charge delivered by the source q_{src} to the capacitor is given by

$$q_{src} = c v_{src}, \quad (2.11)$$

hence the energy stored in the charged capacitor results in

$$E_{c+} = \frac{1}{2} \frac{q_{src}}{v_{src}} v_{src}^2 = \frac{1}{2} q_{src} v_{src}. \quad (2.12)$$

On the other hand, the energy delivered by the energy source is just

$$E_{src} = v_{src} q_{src}. \quad (2.13)$$

The energy lost while transferring energy between the source and the capacitor, is the difference between the energy deliver from the source (2.13) and the energy stored in the capacitor (2.12), which results in

$$E_{loss} = E_{src} - E_{c+} = v_{src} q_{src} - \frac{1}{2} q_{src} v_{src} = \frac{1}{2} q_{src} v_{src}. \quad (2.14)$$

In conclusion, transferring energy between a voltage source and a capacitor is a lossy process. Actually, half of the used energy is lost, and the other half is stored in the capacitor. The energy lost is dissipated in the resistive elements of the current path such as the *on*-channel resistance and track resistances.

2.5 Overview in integration of LED drivers

With regard to the integration of power supplies, we can indemnify two clear approaches, Power System on Chip (PSoC), and Power System in Package (PSiP). PSoCs integrate all converter functions, power train and control, in a single die, using the available in-die reactive components. Currently, the standard VLSI processes offer capacitors and inductors with low energy densities, generally provided for radio frequency (RF) proposes. PSiPs integrate the converter in a single integrated circuit package, allowing to use multiple dies with different technologies and dedicated miniaturized discrete components. Currently there are few commercially available PSiP LED drivers offered by *Linear Technology*.

There is yet another approach in integration of power supplies, where the IC integrates the power train and the control, using off-package passive components. In reality, this is a widely adopted and dominant solution among the different IC manufacturers that provide LED dedicated drivers for the three main applications: Screen back-lighting, general lighting and automotive. In order to fulfil these applications manufacturers offer two possible IC solutions, stand-alone controllers, and integrated power train and controller. These application specific drivers facilitates the development by reducing component count and design time, however the flexibility in the design of the new topologies that help integrability and improve the power density is very limited since the driver topologies are already fixed by the available ICs.

In back-lighting, the commercial ICs integrate a power train, control unit and a communication interface. Back-lighting applications require multiple LED channels, therefore these drivers implement the power train architecture shown in Figure 2.9. A SMPS (inductive or capacitive) converts the supply voltage to a voltage above

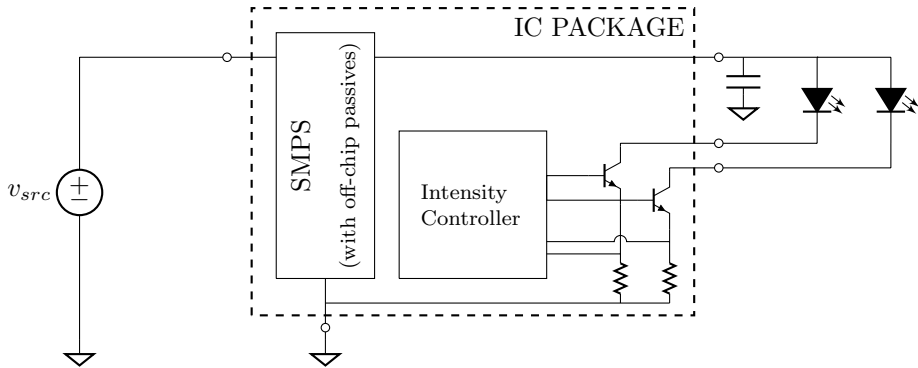


Figure 2.9: Block diagram of a commercial LED driver IC used in back-lighting applications.

the LED strings, and a linear regulator is in series with each LED string channel enabling to control individually the currents for each channel [4, 5]. In general lighting and automotive applications the dedicated commercial ICs implement only inductor based converters such as back, boost, flyback, etc., providing just a solution for the power conversion point of view without integrating other functionalities. With an innovative approach and looking towards the future connected lamps, *Gooee* [1] provides a two chip solution a LED driver chip with off-chip passives, and a dedicated μ Controller unit. The final solution enables a LED lamp with smart functionalities such as sensing, data logging and cloud connectivity.

2.6 Summary

A background of the different driver technologies and the state-of-the-art of LED driver integration was given in order to contextualize our research question:

Could just a SCC drive a High-Brightness LED?

Based on the aforementioned characteristics, a SCC based driver seems to be, a priori, a bad choice, when considering their characteristics in terms of regulation and voltage conversion: SCCs can only provide voltage-to-voltage conversion in discrete steps. Owing to the fact that, as previously mentioned, a LED load is generally supplied by current due to their abrupt $v - i$ characteristics. On possible solution, would be to design a SCC with enough conversion steps, however the necessary granularity in the conversion steps would make the converter practically infeasible due to the large number of capacitors and switches. Another solution, would be to combine the SCC with a linear regulator, what is indeed a commercial solution in screen back-lighting for low-power battery supplied devices. But for higher powers the SCC stage is replaced for an inductive converter. Nevertheless a SCC based

driver would be an interesting candidate from the standpoint of view of integration, since SCCs allow to address high-voltages using a low-voltages process; what might enable to implement a power converter using standard CMOS low-voltage integration processes.

In order to overcome limitations of the SCC while keeping a converter with high efficiency and a tight current regulation, an inductive converter seemed to be a more suitable solution since they excel in both characteristics. However as the voltages addressed by the converter increase, the switches in the converter also scale in voltage, making not possible to implementing converters in a standard CMOS low-voltage process and harming the integrability of the converter. That is why, we found a compromise solution between both SMPS technologies by combining a SCC with an inductor, in what we defined as a *Hybrid-Switched Capacitor Converter* abbreviated in H-SCC.

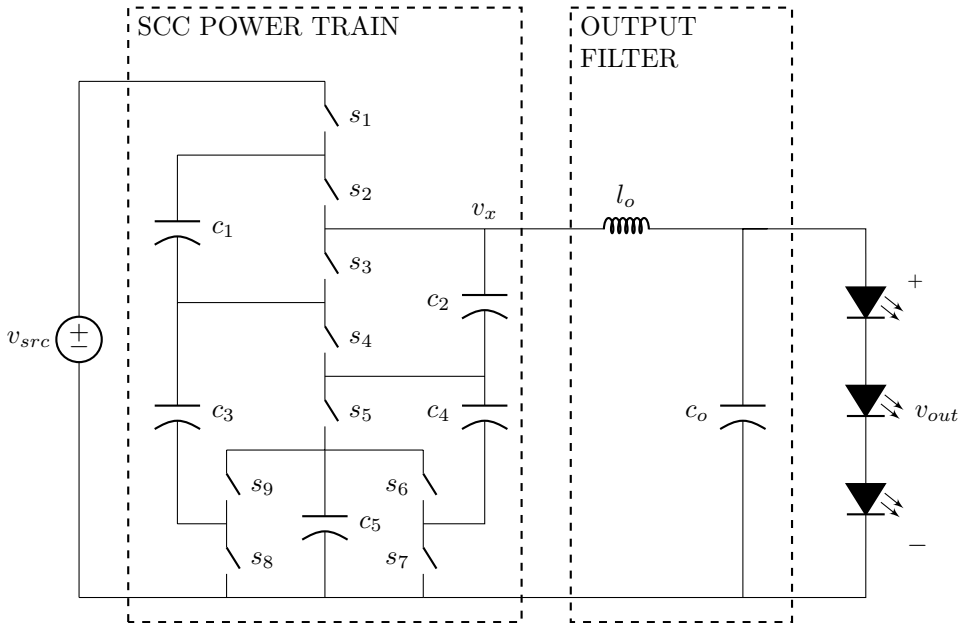


Figure 2.10: New proposed LED driver topology, based on the combination of a SCC and a inductive output filter.

The H-SCC implements converter where the power train is a SCC, and the LED is supplied through an buck-like output filter connected to one of the internal nodes of the SCC. The proposed converter enables a suitable solution for integration, providing high efficiency and current regulation, and at the same time, reducing the size of the inductor compared to an inductive converter. In conclusion, the H-SCC has

been the selected topology for a high-integrated and miniaturized LED driver, and the driver topology of this dissertation.

Bibliography

- [1] the ecosystem. WHAT IS GOOEE?, 2015. URL <http://gooe.com/ecosystem>.
- [2] JD Cockcroft and ETS Walton. Experiments with high velocity positive ions. *Proceedings of the Royal Society of London. Series A, Containing Papers of a Mathematical and Physical Character*, pages 477–489, 1930.
- [3] John F Dickson. On-chip high-voltage generation in mnos integrated circuits using an improved voltage multiplier technique. *Solid-State Circuits, IEEE Journal of*, 11(3):374–378, 1976.
- [4] Weifeng Feng and F.G. Shi. A new switched-capacitor frequency modulated driver for light emitting diodes. *Review of Scientific Instruments*, 78(11):114701–114701–4, Nov 2007. ISSN 0034-6748. doi: 10.1063/1.2804131.
- [5] Yuequan Hu and M.M. Jovanovic. Led driver with self-adaptive drive voltage. *Power Electronics, IEEE Transactions on*, 23(6):3116–3125, Nov 2008. ISSN 0885-8993. doi: 10.1109/TPEL.2008.2004558.
- [6] Dongsheng Ma and Rajdeep Bondade. *Reconfigurable Switched-Capacitor Power Converters. Principles and Designs for Self-Powered Microsystems*. Springer, 2013.
- [7] Vincent Wai-Shan Ng and Seth R. Sanders. *Switched Capacitor DC-DC Converter: Superior where the Buck Converter has Dominated*. PhD thesis, EECS Department, University of California, Berkeley, Aug 2011. URL <http://www.eecs.berkeley.edu/Pubs/TechRpts/2011/EECS-2011-94.html>.
- [8] Tom Van Breussegeem and Michiel Steyaert. *CMOS Integrated Capacitive DC-DC Converters*, chapter 2.3.4, pages 58–59. Springer, 2013.
- [9] DL Waidelich and CL Shackelford. Characteristics of voltage-multiplying rectifiers. *Proceedings of the IRE*, 32(8):470–476, 1944.

Chapter 3

Hybrid-Switched Capacitor LED driver

Driving high power LEDs using a switched capacitor converter (SCC) challenges the operation of this converter. The SCC provides good performance in voltage-to-voltage conversion, but it can not directly provide regulated current. In low power applications, this is solved by using a linear regulator in series with the LED string, however that is not a valid solution for general lighting where high power and high current are needed. Combining switched capacitors with inductors can provide efficient converters for LED lighting, where the use of an inductor provide a tight and efficient regulation, and the use of switched capacitors allows to reduce the voltage stress in the components, in turn reducing both the switching losses and the volume of the inductor.

The *hybrid* switched capacitor converter (H-SCC), that is introduced in this chapter, is a merge of a switched capacitor and an inductive converter. The first section introduces basic facts about switched capacitor converters (SCC) in order to understand the enhancements, modifications and characteristics of the *hybrid*-SCC. The second section presents the H-SCC topology and operation. The third section focus in the applications of the H-SCC as a LED driver circuit. Additionally, some driver architectures are described in this section, giving a broader perspective of the possible applications that H-SCC based LED drivers offer.

3.1 State-of-the-art in SCC based LED drivers

In commercial ICs but also in research the integration and miniaturization characteristics of Switched Capacitor Converters (SCCs) are applied in LED drivers.

Commercially there is a large portfolio of available integrated circuits (ICs), designated as Charge-Pumps (CPs), for backlighting in portable devices, *i.e.* *MAX8930*¹, *MCP1252/3*². By merely adding a few external capacitors, these circuits can drive White or RGB LEDs from a Lithium-Ion battery, as shown in the block diagram of Figure 3.1. Generally these chips integrate a SCC with different conversion ratios with a linear regulator for each channel. Various publications [4, 11, 12] propose different modifications of this architecture in order to reduce the parasitic losses, bringing the efficiency close to the theoretical limit. The power ratings of these drivers are below 1W at currents below hundred *milli*-amperes with efficiencies between 70%-90% depending on the operation point.

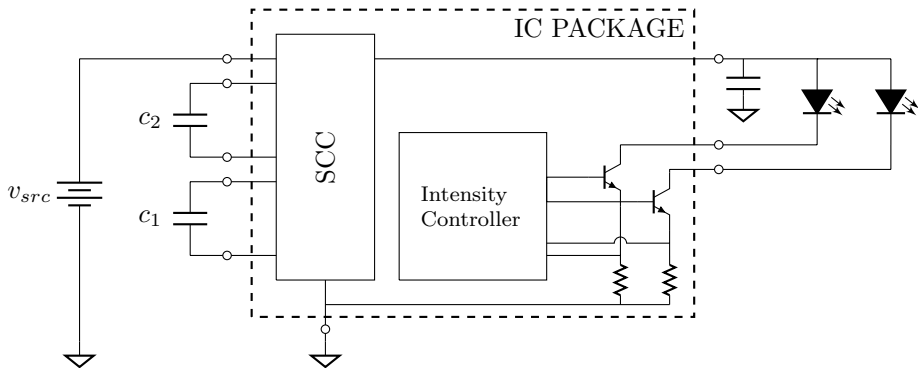


Figure 3.1: Block diagram of the common architecture used in *charge pump* LED drivers for backlighting small screens in portable applications.

With respect to general lighting there are a few research publications that report the use of SCCs. In 2008, Lee et al. [8] presented a step-down converter supplied from rectified $220V_{rms}$ mains voltage, providing 15W with a 95% peak efficiency. The proposed architecture directly supplied the LED string from the capacitors, controlling the output power by changing the switching frequency.

In 2012, Kline et al. [5] proposed an isolated converter that combined a SCC stage with series-LC resonant converter delivering 15.5W with an efficiency of 92%. The SCC stage decreased the rectified mains voltage, reducing the voltage stress in switches, capacitors, and the resonant tank, allowing to diminish the volume of the passive components and the total silicon area. The LED current is regulated by modulating both the frequency and the duty cycle. The architecture was recently implemented in modular silicon dies, allowing to be stacked in order to adjust to different mains voltages [7].

¹Maxim® WLED Charge Pump, RGB, OLED Boost, LDOs with ALC and CAI

²Microchip® Low noise, Positive-Regulated Charge Pump

3.2 Switched Capacitor Converter

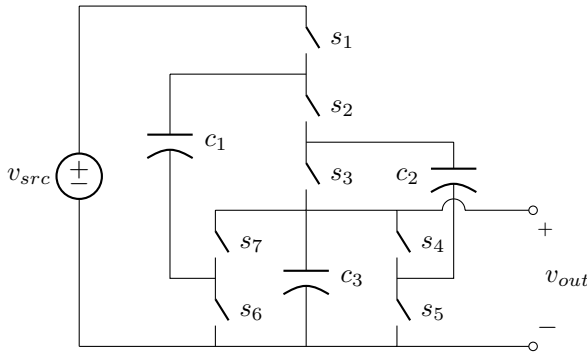


Figure 3.2: 3:1 Dickson Converter.

SCCs are a family of SMPS circuits that provide power conversion using only switches and capacitors. A SCC has two or more operation modes, referred as phases, and each operating mode is associated with a different circuit arrangement of the capacitors. The SCC is sequentially switching between the different modes, providing a voltage conversion between input and output. The Dickson and Ladder topologies (Figures 3.2 and 3.3 respectively) are the preferred SCC topologies used in this dissertation. Both topologies have been selected since they share similar characteristics that favour the design of H-SCCs. Despite the fact that presented examples (in this dissertation) are based on these two topologies, the presented analysis hold for any other well-posed³ SCC topology [10]. The circuit in Figure 3.2 is

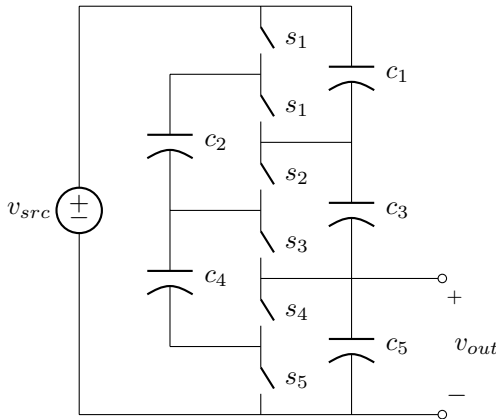


Figure 3.3: 3:1 Ladder Converter.


a two phase 3:1 Dickson converter that provides a step down conversion ratio of $\frac{1}{3}$. During the first phase the odd switches are closed, resulting in the circuit of

³The net equations (KVL) of a well-posed converter provides a solvable system with an unique solution for all capacitor voltages. If these voltages cannot be uniquely determined, the converter is not well-posed.


Figure 3.4a. During the second phase, the even switches are closed, resulting in the circuit of Figure 3.4b.

3.2.1 Conversion ratio

When the converter is unloaded and in steady-state (s.s.), its topology determines the average voltages in the capacitors, and so its conversion ratio. Therefore, the capacitor s.s. voltages and the conversion ratio of the converter can be obtained by solving a system of linear equations defined by applying Kirchhoff's voltage law (KVL) for each circuit mode. Well-posed converters [10] provide a solvable system with a unique solution, converters that result in undetermined or overdetermined linear systems are non-well-posed converters, and generally require a modification of the converter circuit.

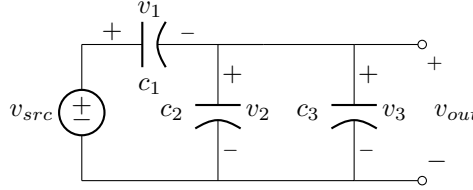

(a) First phase, odd switched are closed and even switches are open.

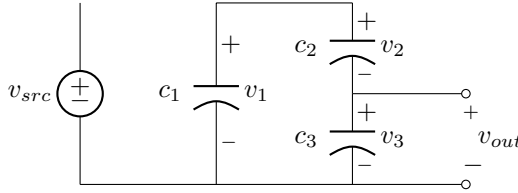

(b) Second phase, even switched are closed and odd switches are open.

Figure 3.4: Equivalent circuits of the modes in 3:1 Dickson converter.

KVL equations of the first phase (see Figure 3.4a) are:

$$\begin{aligned}
 v_{src} - v_{c_1} - v_{c_2} &= 0, \\
 v_{out} - v_{c_2} &= 0, \\
 v_{out} - v_{c_3} &= 0.
 \end{aligned} \tag{3.1}$$

KVL equations of the second phase (see Figure 3.4b) are:

$$\begin{aligned} v_{c1} - v_{c2} - v_{c3} &= 0, \\ v_{out} - v_{c3} &= 0. \end{aligned} \quad (3.2)$$

Selecting the linear independent equations from (3.1) and (3.2), a solvable system can be formulated as

$$\begin{cases} v_{src} - v_{c1} - v_{c2} = 0 \\ v_{c1} - v_{c2} - v_{c3} = 0 \\ v_{c2} = v_{out} \\ v_{c3} = v_{out} \end{cases}. \quad (3.3)$$

Solving it results in

$$\begin{aligned} v_{out} = v_{c3} = v_{c2} &= \frac{V_{src}}{3}, \\ v_{c1} &= \frac{2 \cdot V_{src}}{3}, \end{aligned} \quad (3.4)$$

hence the converter conversion ratio is

$$m_i = \frac{v_{out}}{v_{src}} = \frac{1}{3}. \quad (3.5)$$

This result shows that unloaded conversion ratio is defined by the topology of the converter and independent of the switching operating regime (frequency and duty cycle). From here on, the topology defined conversion ratio will be referred to as the *intrinsic* conversion ratio m_i .

3.2.2 Output voltage regulation

As previously demonstrated, a SCC has a fixed conversion ratio only defined by its topology and not by its operation regime, therefore the converter can not directly provide voltage regulation. Indirectly, there is always the possibility to regulate the

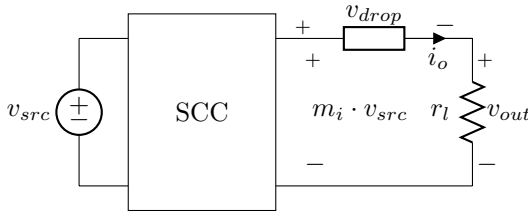


Figure 3.5: Conceptual block diagram of a linear regulated switched capacitor.

output voltage by means of a linear regulator, thus the output voltage is adjusted by drooping the excess voltage (v_{drop}) in a series element with the load, as shown in

the schematic of Figure 3.5. This can be achieved in two ways: Using an external linear regulator connected between the converter output and the load, or what is more common, using or '*misusing*' the behaviour of the SCC in order to provide this linear regulation characteristic [9] . Both ways of regulation reduces the efficiency of the converter. Like in a linear regulator (2.2), the efficiency of the converter can be written as a function of v_{src} and v_o , giving

$$\eta = \frac{P_o}{P_i} = \frac{v_o \cdot i_o}{m_i \cdot v_{src} \cdot i_o} = \frac{v_o}{m_i \cdot v_{src}}. \quad (3.6)$$

In order to compare the efficiencies among different converters, we define the *effective conversion ration* m_e as the ratio between the voltage source and the load, thus

$$m_e = \frac{v_{out}}{v_{src}} \quad (3.7)$$

Figure 3.6 compares the efficiency of a linear regulator and a linear regulated 2:1 SCC, showing that below $m_e = 1/2$ the 2:1 SCC has better efficiency, however above $1/2$ the SCC is not longer operative. Anyway in both cases the efficiency drops as the output voltages decreases.


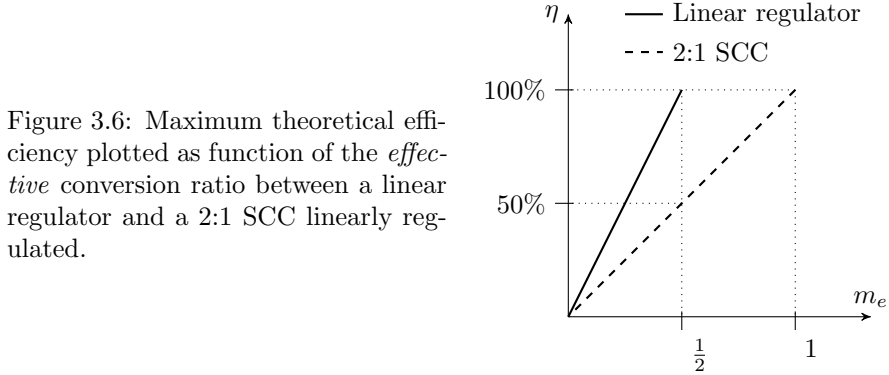



Figure 3.6: Maximum theoretical efficiency plotted as function of the *effective* conversion ratio between a linear regulator and a 2:1 SCC linearly regulated.

3.2.3 Multiple conversion ratio converters

Multiple conversion ratio converters enable to extend the regulation margins and increase the conversion efficiency. Figure 3.6 shows the limitations of a 2:1 SCC. First, the converter is only operative for *effective* conversion ratios (m_e) below $1/2$. Second, as m_e moves below the intrinsic conversion ratio of the converter ($m_i = 1/2$) the efficiency decreases linearly. Other topologies, like the one of Figure 3.7a, have multiple *intrinsic* conversion ratios - $\frac{1}{3}$, $\frac{1}{2}$, $\frac{2}{3}$ and 1 - that extend the operation margins and increase the efficiency of the converter as shown in the plot of Figure 3.7b.

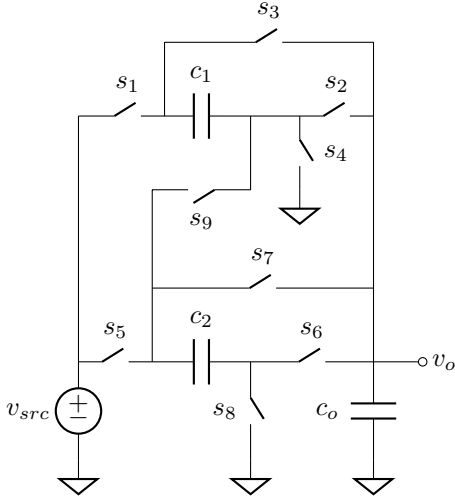

(a) Circuit schematic

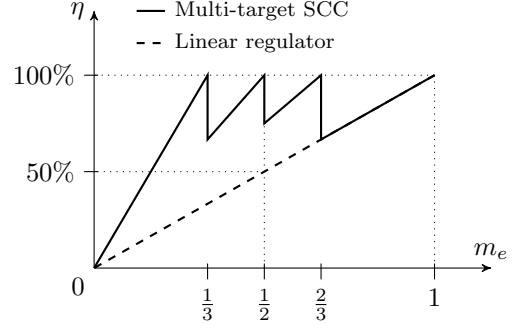

(b) Maximum theoretical efficiency.

Figure 3.7: Multiple conversion ratio converter.

3.2.4 Converter output nodes

The previous section presented switched capacitor converters with the load connected to a node that provides a fixed conversion ratio. Actually, that is the most common way of employing these converters, however a SCC can supply the load from other nodes. As shown in Figure 3.8, two different types of nodes can be identified: *node a* - fixed voltage *dc*-node; *node b* - floating voltage *pulse width modulated* node (*pwm*-nodes).

Fixed voltage *dc*-nodes are the common output nodes of a SCC. A *dc*-node supplies the load with a fixed conversion ratio defined by the topology, and with a low voltage ripple thanks to the capacitor in parallel with the load. The capacitors that are connected between a *dc*-node and ground are *dc*-capacitors as shown in Figure 3.8. A SCC can have one or more *dc*-capacitors. Topologies that reduce the number of *dc*-capacitors trend to have a better capacitor utilization, since these capacitors do not contribute to transport charge [10].

The use of floating *pulse width modulated*-nodes (*pwm*-nodes) was not reported until a couple of recent publications [5, 6] presented the advantages of using them. *Pwm*-nodes were considered internal to the converter without any added functionality, nevertheless the conversion possibilities of SCCs can be further enhanced by using these nodes as outputs for the converter. *Pwm*-nodes are accessible from the terminals of flying capacitors (c_{fly}), delivering a floating pulse-width-modulated (PWM)

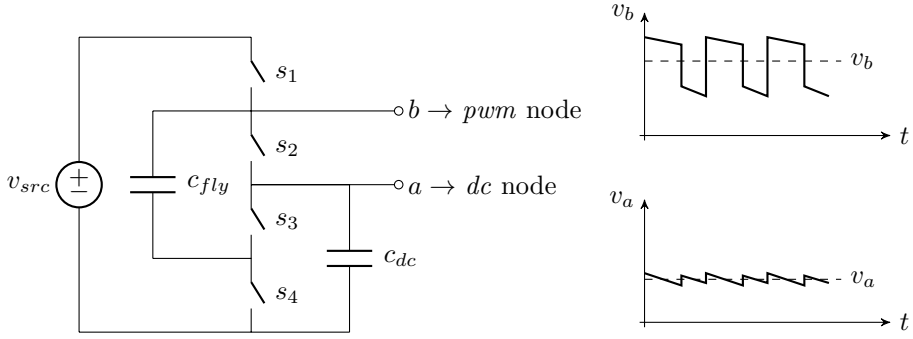


Figure 3.8: Node types in a 2:1 converter: Node a is a dc -node; its voltage, v_a is plotted in the bottom graph. Node b is a pwm -node; its voltage, v_b , is plotted in the top graph.

voltage with an added dc offset of a fraction of the input voltage with respect to ground. The magnitudes are related to the SCC topology. The pulsating voltages can be filtered using an inductive-capacitive filter (LC), allowing to supply a dc load with the averaged voltage of the node. Furthermore the pwm voltage at the node can be controlled by adjusting the duty cycle of the SCC, enhancing the regulation capabilities of these outputs compared to the fixed conversion ration of the dc -nodes.

3.3 Hybrid-Switched Capacitor Converter

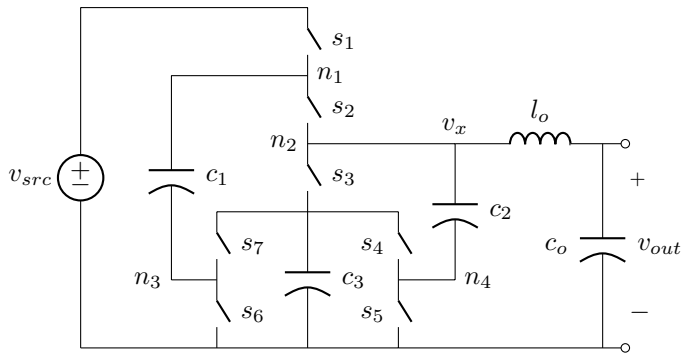


Figure 3.9: A 3:1 H^2 -Dickson topology with the inductor connected to the second pwm -node.

A Hybrid Switched Capacitor Converter (H-SCC) uses a low pass filter to supply a

dc voltage from a pwm -node. Figure 3.9 shows the *hybrid* configuration of the 3:1 Dickson converter, where the output filter is connected to the node n_2 . The low pass filter is composed of an inductor l_o and capacitor c_o , and removes high frequency ac -component present in the node. From this point on the *hybrid* variation of a SCC topology will be denoted by adding an H^x in front of the topology's name, where the superscript refers to the used output, thus the converter in Figure 3.9 is now referred as 3:1 H^2 -Dickson.

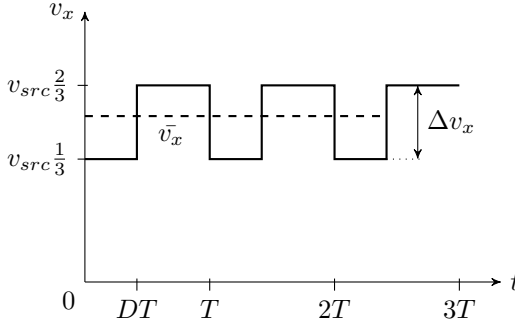
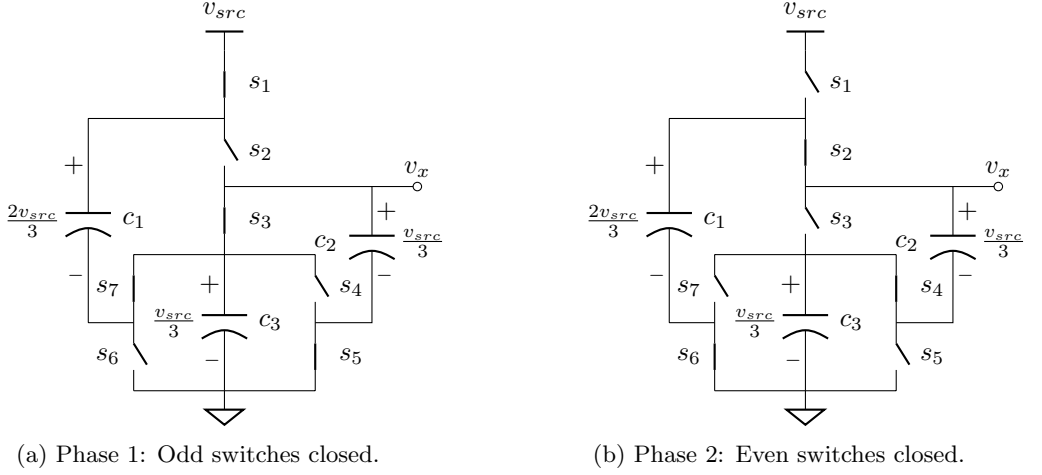


Figure 3.10: Transient voltage at the switching node v_x of the 3:1 H^2 -Dickson in Figure 3.9

For sake of clarity, the operation of a H-SCC is illustrated with the 3:1 Dickson converter used previously, which the steady-state (s.s.) voltages were already solved in Section 3.2.1. Except for the added filter, the SCC topology keeps the same circuit structure as in the original converter, and so they do the s.s. voltages in the capacitors. The two switching modes of the converter are shown in Figures 3.11a and 3.11b, displaying the voltages values of the capacitors. Through a graphical inspection, it can be seen that the voltage at the switching node v_x is different in each switching cycle, producing the pwm -voltage shown in Figure 3.10. The unloaded voltage at the switching node v_x over an entire switching period T_{sw} is defined with a discontinuous function as

$$v_x(t) = \begin{cases} \frac{1}{3}v_{src} & : & 0 < t \leq DT_{sw} \\ \frac{2}{3}v_{src} & : & DT_{sw} < t \leq T_{sw}, \end{cases} \quad (3.8)$$

where D corresponds to the duty cycle of the odd switches. The output filter averages the voltage at the switching node v_x , therefore the mean value at v_{out} can be obtained

Figure 3.11: Two switching phases of *hybrid* 3:1 Dickson loaded at the second node.

by integrating (3.8) over an entire switching cycle,

$$v_{out} = \frac{1}{T} \int_0^T v_x(t) dt \quad (3.9)$$

$$v_{out} = \frac{1}{T} \left(\int_0^{DT} \frac{1}{3} v_{src} dt + \int_{DT}^T \frac{2}{3} v_{src} dt \right) \quad (3.10)$$

$$v_{out} = \frac{2-D}{3} v_{src}, \quad (3.11)$$

thus the intrinsic conversion ratio of the converter for the second node (n_2) is

$$m_2 = \frac{v_{out}}{v_{src}} = \frac{2-D}{3}, \quad (3.12)$$

where the subscript in m denotes the node of the converter. The numbering of the nodes is done from top-bottom to left-right, see the circuit schematic of Figure 3.9. In the 3:1 H^2 -Dickson there is actually a plurality of *pwm*-nodes. Figure 3.12 plots all the switching voltages available in the converter. The square-wave voltages are equally spaced to cover the range from 0 to v_{src} with a voltage ripple of $v_{src}/3$. Being this equal spacing is unique of Dickson and Ladder compared to the other SCC topologies. In fact, the amplitude of the PWM voltages, so in the switching node v_x , is fixed by the intrinsic conversion ratio m_i , hence

$$\Delta v_x = m_i v_{src}. \quad (3.13)$$

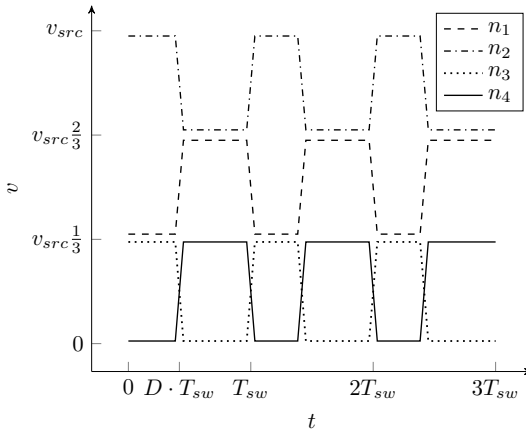


Figure 3.12: Transient voltage at the different *pwm*-nodes of the 3:1 H-Dickson converter of Figure 3.9.

Notice that, a H-SCC shares many of the characteristics of a buck converter, which is the most common *dc-dc* topology used as a LED driver. Adding the output filter to a SCC complements the converter by providing tight current regulation, which overcomes the intrinsic limitation of SCC in this respect. However, it requires magnetic elements, challenging the integrability of the converter. The following sections introduce the characteristics of this new *hybrid* topology as a LED driver, using the buck converter as a reference.

3.3.1 Output Regulation

In contrast with the classical SCC, the conversion ratio of a H-SCC converter can be adjusted. It actually depends on the duty cycle (D) of the driving signals, and consequently the conversion ratio can be adjusted to provide regulation to the load without directly affecting the converter's efficiency.

Figure 3.13 compares the trend curves of the converter efficiency with respect to the conversion ratio for a three different converters a 3:1 H³-Dickson, a 3:1 Dickson and a buck converter. For instance, the *dc*-node of the 3:1 Dickson has an intrinsic conversion ratio of $m_i = \frac{1}{3}$, and it provides regulation at the cost of efficiency. Instead using the third *pwm*-node (n_3) of the same Dickson converter of Figure 3.9, the converter has an adjustable conversion ratio given by

$$m_3 = \frac{D}{3} \quad (3.14)$$

where D is the duty cycle of the odd numbered switches. In this case the efficiency-regulation (η - m_e) curve is flat within the regulation margins, and drops for extreme duty cycles because of, not yet discussed⁴, internal losses of the SCC stage. Fur-

⁴The details of the loss mechanisms in SCC and H-SCC are covered in Chapter 4 dedicated to modeling.

thermore, the η - m_e curve of a H-SCC is similar to the one of a buck converter but with a smaller dynamic range.

Figure 3.13: Comparison of regulation-efficiency characteristics between converters.

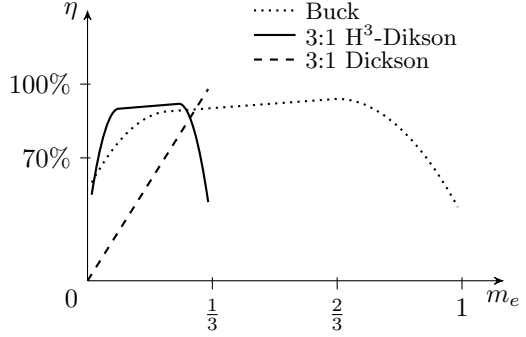


Table 3.1: Intrinsic conversion ratios, m_i , at the different nodes of a 3:1 H-Dickson converter.

Node		n_1	n_2	n_3	n_4	n_{dc}
Conversion ratio	m_x	$\frac{2+D}{3}$	$\frac{2-D}{3}$	$\frac{D}{3}$	$\frac{1-D}{3}$	$\frac{1}{3}$
Range of conversion		$1 \cdots \frac{2}{3}$	$\frac{2}{3} \cdots \frac{1}{3}$	$0 \cdots \frac{1}{3}$	$0 \cdots \frac{1}{3}$	-
Dynamic conversion range	Δm	$\frac{1}{3}$	$\frac{1}{3}$	$\frac{1}{3}$	$\frac{1}{3}$	-

Ideally a buck converter provides a conversion ratio between 0 and 1. Indeed, it is the same case for a H-SCC, however the conversion ratio is segmented in different ranges. Each segment is associated with a different *pwm*-node of the converter, and it has a limited dynamic range of regulation Δm . Table 3.1 presents the conversion characteristics for the different nodes of the 3:1 H-Dickson of Figure 3.9. It can be seen that the dynamic range of conversion (Δm) is the same across all the *pwm*-nodes and equal to the intrinsic conversion ratio of the converter m_i . This characteristic is also shared between the two topologies used in this dissertation, Dickson and Ladder.

3.3.2 Power Inductor

Like in a buck converter, a H-SCC uses a inductor-capacitor (LC) low pass filter to supply the *dc* voltage to the load. The use of an inductor challenges the integrability of the converter, as was already discussed in the second chapter, nevertheless the added advantages in terms of regulation and efficiency justify its use. At the same time, the inductor benefits from the reduced voltage excursion present on the *pwm*-nodes, relaxing its requirements in terms of inductance and size.

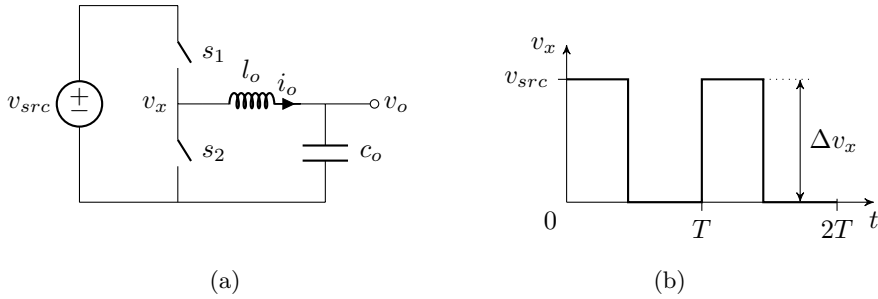


Figure 3.14: Inductor based converter, *left* - synchronous buck converter schematic; *right* - transient voltage at the switching node during two switching periods.

The inductance value of the power inductor in a buck type converter configuration is

$$l_o = \frac{\Delta v_x D(1-D)}{\Delta i f_{sw}}, \quad (3.15)$$

where Δi is the *peak-to-peak* current amplitude in the inductor, D the duty cycle of the buck high side switch. From (3.15) it can be seen that the size of the power inductor is directly proportional to the amplitude of the square-wave voltage at the switching node (Δv_x), while for a buck converter it is equal to the source voltage, as shown in the plot from Figure 3.14b. Specifying (3.15) for a buck converter, gives

$$l_{o,buck} = \frac{v_{src} D(1-D)}{\Delta i f_{sw}}. \quad (3.16)$$

Contrary to the buck converter, in the H-SCC the square-wave voltages are floating with respect the ground (see Figure 3.10) and its ripple amplitude Δv_x depends on the converter's topology. In the case of the Dickson and Ladder converters the amplitude of the voltage ripple Δv_x is the same for all of the *pwm*-nodes and equal to

$$\Delta v_x = m_i \cdot v_{src}, \quad (3.17)$$

therefore specifying (3.15) for a Dickson or a Ladder H-SCC, gives


$$l_{o,hsc} = \frac{m_i \cdot v_{src} \cdot D(1-D)}{\Delta i f_{sw}}. \quad (3.18)$$

An important remark is that the duty cycles D in (3.18) and in (3.16) are not correlated, therefore the two equations can not be directly compared. Figure 3.15 plots the normalized⁵ inductor values for Buck, 3:1 H-Dickson and 4:1 H-Dickson converters. The plot shows a concave function for the buck converter where the highest inductance value is when the converter operates at 50% conversion ratio. In

⁵Normalization given for $v_{src} = 1V$, $T_{sw} = 1s$ and $\Delta i = 1A$.

contrast, the curves corresponding to H-SCCs present multiple concave peaks, where each of them corresponds to a selected node of the HSCC converter. For instance, looking at the dashed line plotted for the 3:1 H-Dickson converter of Figure 3.9, the first parabola spans m between 0 and $1/3$, where an inductor is connected to $n3$ or $n4$. The second parabola spans m between $1/3$ and $2/3$, where an inductor is connected to $n2$. The last parabola spans m between $2/3$ and 1, where the inductor is connected to $n1$.

Figure 3.15: Inductance value for Buck, 3:1 H-Dickson and 4:1 H-Dickson converters as function of the conversion ratio; results are normalized for $V_{src} = 1V$, $T_{sw} = 1s$ and $\Delta i = 1A$.

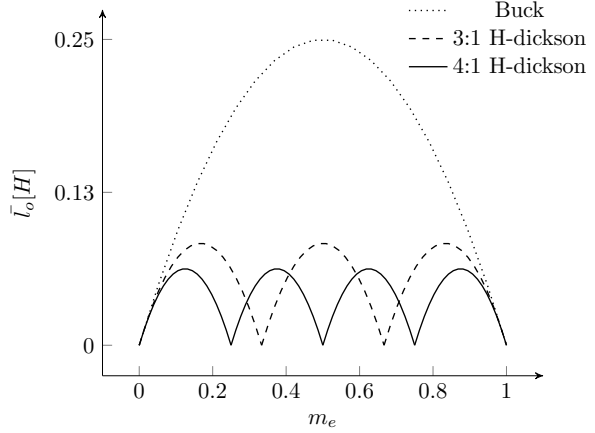

The reduction in inductance value with respect to the buck converter spans out from 50% conversion ratio to the extremes where the inductance takes the same values for all the converters. The physical size of the inductor is proportional to the peak energy stored in it, and it can be computed from the maximum current through the inductor

$$E_{l,max} = \frac{1}{2} i_{max}^2 l_o. \quad (3.19)$$

The minimum inductance value occurs when the converter operates in boundary conduction mode (BCM) for converters designed to operate continuous conduction mode (CCM), as is the case of the H-SCC. When a buck or H-SCC converter operates in BCM, the minimum current is equal to zero and the peak current is equal to twice of the output current of the converter. Thus, the maximum inductor current is

$$i_{max} = \Delta i = 2i_{out} \quad (3.20)$$

By substituting (3.20) and (3.16) into (3.19), the inductor peak energy for a buck can be found

$$E_{l,buck} = \frac{i_{out} v_{src} D(1-D)}{f_{sw}}. \quad (3.21)$$

In a buck converter the source voltage can be written as

$$v_{src} = \frac{v_{out}}{D}, \quad (3.22)$$

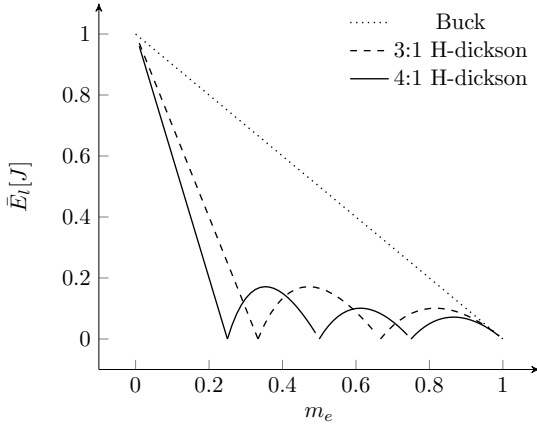


Figure 3.16: Peak energy storage for Buck, 3:1 H-Dickson, and 4:1 H-Dickson converters as function of the conversion ratio; results are normalized for $P_{out} = 1W$ and $f_{sw} = 1Hz$.

thus by substituting (3.22) into (3.21), the $E_{l,buck}$ yields to

$$E_{l,buck} = \frac{v_{vout}}{D} \frac{i_{out} D(1-D)}{f_{sw}} = \frac{(1-D)}{f_{sw}} P_{out}. \quad (3.23)$$

By substituting (3.20) and (3.18) into (3.19), the inductor peak energy for a H-SCC using Dickson or Ladder stages can be found

$$E_{l,hsc} = \frac{m_i i_{out} v_{src} D(1-D)}{f_{sw}}. \quad (3.24)$$

Rearranging (3.7) v_{src} can be written as function of the *effective* conversion ratio, as


$$v_{src} = \frac{v_{out}}{m}. \quad (3.25)$$

Subsequently, by substituting (3.25) into (3.24), the resulting expression of the inductor maximum energy yields to

$$E_{l,hsc} = \frac{v_{vout}}{m_e} \frac{m_i i_{out} D(1-D)}{f_{sw}} = \frac{m_i D(1-D)}{m_e f_{sw}} P_{out}. \quad (3.26)$$

Figure 3.16 plots (3.23) and (3.26), both plots have the same trend of reducing the peak energy as the conversion ratio increases. With regard to the inductance value (see Figure 3.15), the peak energy stored in the inductor, and hence the volume, are dramatically reduced in case of using a H-SCC topology; as shown in Figure 3.17. The plot shows that the reduction in inductance volume ranges from a conversion ratio of 50% to the extremes 0% and 100% symmetrically, being very effective in most of the conversion ratio range of the converter and decreasing at the two extremes. As the intrinsic conversion ratio m_i of the SCC stages decreases, the reduction in inductance increases, and the effective region spans for a larger range of conversion ratios.

Figure 3.17: Peak energy storage normalized with respect to a buck converter for a 3:1 H-Dickson and a 4:1 H-Dickson converters as function of the conversion ratio.

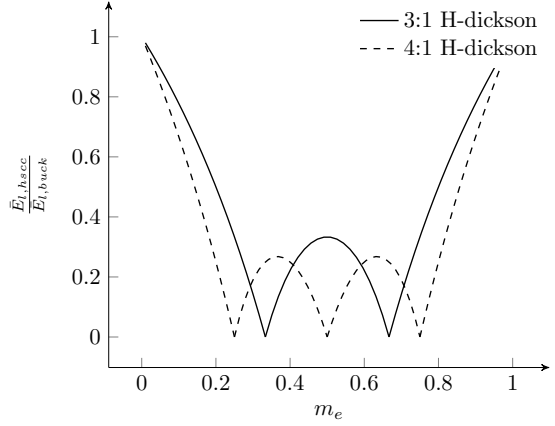

3.3.3 Power Switches

The large number of switches used in a H-SCC has different advantages with regards to miniaturization of the converter. In fact, in a H-SCC the voltage stress applied to the different switches is a fraction of the input voltage, in contrast to the buck converter where each of the switches have to block the full input voltage. Therefore SCCs can be implemented with switches rated at lower voltages than the input voltage. Reducing the voltage stress at the switches has the following advantages:

- Low voltage devices take less silicon area in the standard integration processes.
- Switching performance is better since the lower voltages switches are smaller in area, and they have less parasitic capacitances, as a consequence they can switch faster.
- Switching losses of the converter are reduced since they have a quadratic relationship with the blocking voltages of the switches (v_{ds}).

From the three above-mentioned advantages, the two first facts are mainly technology-related hence their benefits are not trivial to be quantified. In contrast, the last fact can be assumed to be technology-independent and easily quantified. By assuming that drain-source capacitance c_{ds} is a constant among different devices and technologies, the switching losses can be computed and compared with respect to the buck.

Switching losses are given by [3]

$$P_{sw} = \frac{1}{2} f_{sw} \cdot c_{ds} \cdot v_{ds}^2. \quad (3.27)$$

In a buck converter of Figure 3.14a the blocking voltage of the switches is v_{src} , thus using (3.27) the switching losses result in

$$P_{sw,buck} = f_{sw} \cdot c_{ds} \cdot v_{src}^2. \quad (3.28)$$

Table 3.2: Stress voltages at the switches of the 3:1 H-Dickson of Figure 3.9.

Switch	v_{ds}
$s_1, s_3 \cdots s_7$	$\frac{1}{3}v_{src}$
s_2	$\frac{2}{3}v_{src}$

The blocking voltages of the 3:1 H-Dickson are shown in Table 3.2. Applying (3.27) the switching losses for the converter can be formulated, resulting in

$$P_{sw,hsc} = \frac{6}{2}f_{sw} \cdot c_{ds} \left(\frac{1}{3}v_{src} \right)^2 + \frac{1}{2}f_{sw} \cdot c_{ds} \left(\frac{2}{3}v_{src} \right)^2, \quad (3.29)$$

rearranging (3.29), yields to

$$P_{sw,hsc} = \frac{5}{9}f_{sw} \cdot c_{ds} \cdot v_{src}^2. \quad (3.30)$$

By dividing (3.28) and (3.30), we can obtain the ratio between the two converters

$$\frac{P_{sw,hsc}}{P_{sw,buck}} = \frac{5}{9}. \quad (3.31)$$

The result shows that using a H-SCC we can achieve a reduction of the switching losses of almost one half with respect to the buck converter, even when the H-SCC converter is using five more switches than the buck converter. Applying (3.27) with the blocking voltages defined for the N:1 Dickson and Ladder converters in Table 3.3, the formulation of the switching losses can be generalized, resulting in

$$P_{sw,dickson} = \frac{4+N}{8 \cdot N^2} \cdot v_{vin}^2 \cdot f_{sw} \cdot c_{ds}, \quad (3.32)$$

$$P_{sw,ladder} = \frac{1}{N} \cdot v_{src}^2 \cdot f_{sw} \cdot c_{ds}. \quad (3.33)$$

Normalizing them with respect to the power losses of the buck converter (3.28), yields

$$\bar{P}_{sw,dickson} = \frac{4+N}{8 \cdot N^2}, \quad (3.34)$$


$$\bar{P}_{sw,ladder} = \frac{1}{N}. \quad (3.35)$$

Figure 3.18 plots (3.34) and (3.35), showing the switching loss ratio with respect to the buck converter. It can be seen that both converters reduce the switching

Table 3.3: Switch blocking voltage of Dickson and Ladder converters.

Converter	N:1 Dickson $N \geq 3$	N:1 Ladder $N \geq 2$
# Switches	$4 + N$	$2 \cdot N$
v_{ds}	$6 \rightarrow \frac{v_{src}}{N}$ $(N - 2) \rightarrow \frac{2v_{src}}{N}$	$\frac{v_{src}}{N}$

Figure 3.18: Switching loss ratio for Dickson and Ladder converters with respect to the buck converter.

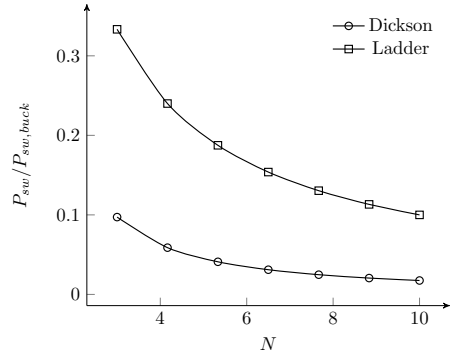

losses with respect to the buck converter. In fact, as N increases to losses decrease, although the number of switches increase as well. Reducing the switching loss will enable to operate the converter at higher frequencies, thus with a smaller switching period T_{sw} , which is also effective in the reduction of the power inductor.

The lecture of the results is given from a qualitative perspective, consequently a couple of considerations have to be pointed regarding a practical implementation of a H-SCC. First, they are obtained assuming that c_{ds} is the same for all the switches in both converters. In a practical converter each device has a different c_{ds} value defined by two of the device parameters; c_{ds} is directly proportional to the rated v_{ds} voltage and inversely proportional to the channel resistance r_{on} . Theoretically, lower voltage switches have smaller c_{ds} , but the final value will also depend on its r_{on} . Second, H-SCC has a larger number of devices in series in the current path compared to a buck, that only has only one switch in the current path in both phases. A proper H-SCC design reduces the number of switches in the high current path, helping to keep the conduction loss low. In order to provide a better understanding of the advantages that H-SCC offer, the last chapter of the dissertation provides a deeper analysis between converters.

3.3.4 Multiple Outputs

The use of the internal nodes of the SCC allows to provide multiple outputs with a single power train. For instance, the converter could be simultaneously loaded at the *pwm*-nodes and at the *dc*-node, providing different conversion ratios for each output. The conversion ratio at the *dc*-node (or nodes) is given by the intrinsic conversion ratio of the converter m_i , independent of the variations in the duty cycle of the driving signal, yet this fixed output can be linearly regulated to adjust the output voltage. The conversion ratio for the other *pwm*-nodes is a function of D and determined for each node by the node conversion ration m_n . In the case of using multiple *pwm*-nodes, all the outputs will depend on D , hence it will not be possible to have independent regulation for each of the outputs. This happens because in order to guarantee the proper operation of a SCC, all switches are associated to a phase, hence they can not be independently controlled.

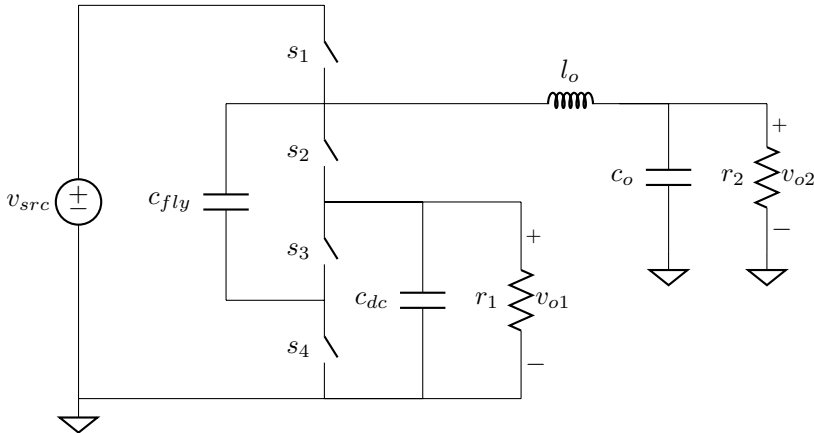


Figure 3.19: 2:1 H-SCC with two outputs; r_1 is supplied by the *dc*-node and r_2 is supplied by the first *pwm*-node.

Figure 3.19 shows a converter with two output voltages. One load r_1 is connected to the *dc*-node with an output voltage approximated by

$$v_{o1} = \frac{1}{2} v_{src}. \quad (3.36)$$

the other load r_2 is connected to the first *pwm*-node with an output voltage function of D as

$$v_{o2} = \frac{1+D}{2} v_{src}. \quad (3.37)$$

The voltage v_{o2} can be regulated by means of D .

3.4 DC-DC LED Drivers

The buck converter is one of the most used topologies for LED drivers in *dc-dc* applications. It has an excellent current regulation and a continuous output current thanks to the inductor connected in series with the output, as shown in Figure 3.20a.

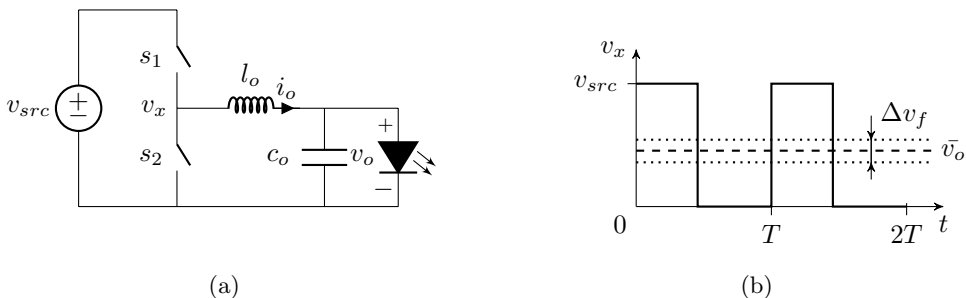


Figure 3.20: *Left* - buck based LED driver schematic; *right* - transient voltage at the switching node(thick line), average output voltage (dashed line), and forward voltage limits (dotted lines).

It can be seen in Figure 3.20b that the voltage swing at the switching node (v_x) of a buck converter goes from ground to v_{src} providing the full conversion ratio range, between 0 and 1. Actually, this regulation range is often much wider than the margins of variation in the LED's forward voltage, as shown in Figure 3.20b. The *dashed* line represents the average output voltage \bar{v}_o , thus the LED's forward voltage v_f , and the dotted lines represent the forward voltage variation boundaries Δv_f , being them around $\pm 10\%$. Previously, in Chapter 2.1 was given a detailed discussion about the characteristics of the LED as a load.

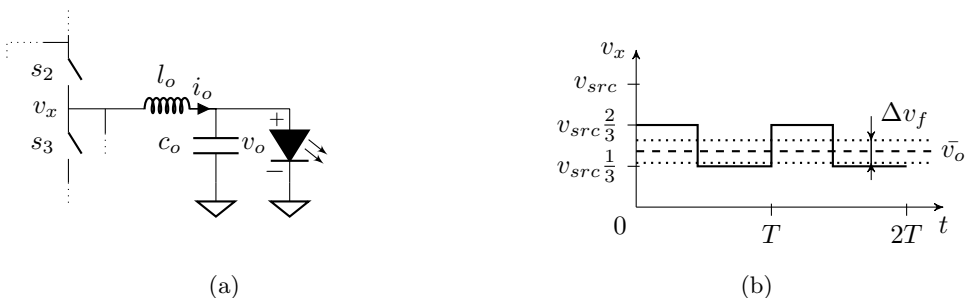


Figure 3.21: *Left* - switching node detail of a 3:1 H-Dickson based LED driver; *right* - transient voltage at the switching node(thick line), average output voltage (dashed line), and forward voltage limits (dotted lines).

The abrupt $v-i$ characteristics of the LEDs is an advantage for the reduced conversion range of the H-SCC. Contrary to the buck converter, the H-SCC has a smaller voltage swing in the switching node. Figure 3.21 shows that the voltage limits of the switching node in a H-SCC can accommodate these variations of the LED's forward voltage. As previously described in Section 3.3.1, the dynamic conversion range at the outputs depend on the intrinsic conversion ratio m_i of the SCC stage, therefore this dynamic range can be adjusted to the requirements of the load.

3.4.1 Single-stage *dc-dc* with auxiliary output voltage

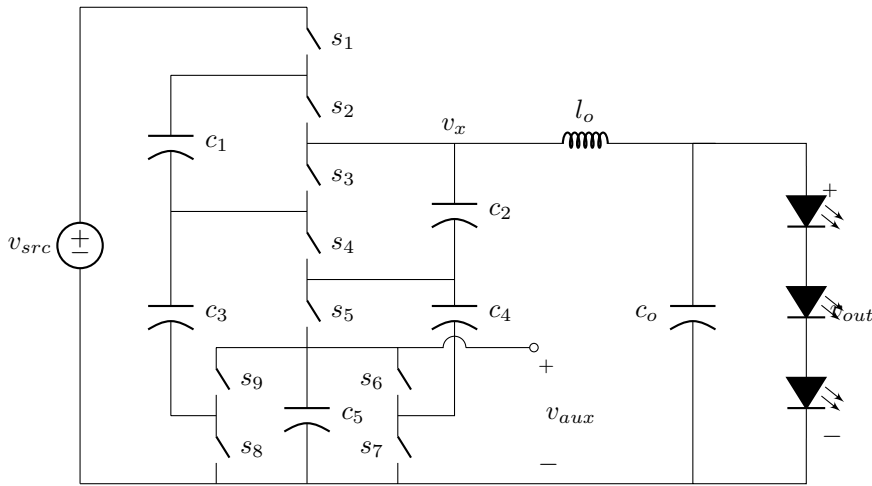


Figure 3.22: 5:1 H^2 -Dickson LED driver for 24V e-merge track lighting application. The driver has two outputs: A 12V, 12W LED string, and 4V, 200mW to supply low power auxiliary loads.

Figure 3.22 shows the *dc-dc* LED driver with an auxiliary output voltage [2] used in the experimental set-up as a proof of concept for this dissertation, being presented in Chapter 5. The converter features two outputs: The main output v_{out} supplies the LED load and normally delivers the largest amount of power. The output voltage can be controlled using the duty cycle D , thus its value is given by

$$v_{out} = v_{src} \frac{4 - D}{5}. \quad (3.38)$$

The secondary output v_{aux} supplies the low voltage electronics dedicated to the control of the driver, providing functionalities such as connectivity, light control and stand-by operation. The secondary output has no direct means of regulation and

provides a fix conversion ratio equal to

$$v_{aux} = v_{src} \frac{1}{5}. \quad (3.39)$$

Nevertheless, the voltage at this output can still be controlled by means of a linear regulator.

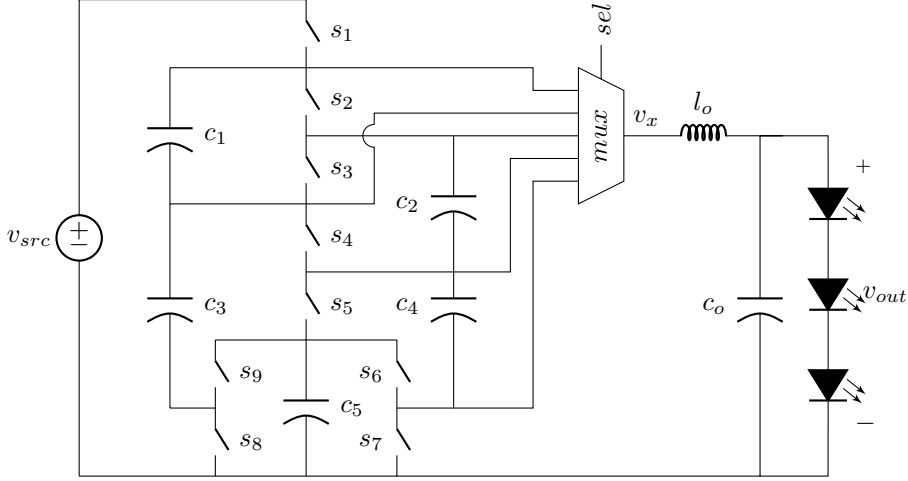


Figure 3.23: 5:1 H-Dickson LED driver with a multiplexer that enables to connect the different switching nodes with the power inductor.

3.4.2 Single-stage *dc-dc* with extended conversion range

The reduced voltage swing at v_x , on the one hand favors in the reduction of output inductor, but on the other hand shrinks the conversion to a narrow range between $3/5$ and $4/5$. Using the same topology, the conversion ratio of the converter can be extended to the full range between 0 and 1, like in a buck converter, introducing a multiplexer [1] between the different floating *pwm*-nodes and the power inductor as shown in Figure 3.23. With this enhancement the power inductor can now be connector to any of the available *pwm*-nodes of the SCC stage.

3.5 Summary

In this chapter the hybrid switched capacitor converter (H-SCC) was introduced. First, the main operation and performance characteristics of the SCC were presented,

with special emphasis on the limitations that these converters have with respect to load regulation.

Subsequently, the H-SCC was described as a combination of SCC with an inductor. Such a *hybrid* combination makes it possible to achieve a much better regulation than possible with the pure SCCs. In fact, the regulation enhancements in the H-SCC make the converter comparable to an inductive converters, especially to the buck. For that reason, two metrics were presented in order to qualitatively evaluate the benefits of these converters with respect to integration. These metrics shown that when using a H-SCC the inductor size and switching losses can be reduced compared to a buck converter.

Finally, the last section was dedicated to exploring the possibilities of the H-SCCs for LED driving. Different driver architectures for *dc-dc* applications were presented, introducing the architecture that was used in the final demonstrator if this disoperation.

In conclusion, the H-SCC is a new power converter topology composed of a SCC and an inductor. The SCC implements the power train structure, where the SCC's conversion ratio adds a new variable to the design of the converter. Modifying this variable allows to adjust the voltages stress if the switches, capacitors, and inductors, and favors the integrability of the converter. At the same time, the extra inductor extends the regulation margins because it allows to control the output voltage with the duty cycle of the SCC stage.

Bibliography

- [1] J. Delos, T. Lopez, M.A.M. Hendrix, and E. Alarcon. Compact power conversion device with continuous output regulation range, 03 2015. URL https://www.lens.org/lens/patent/WO_2015_040575_A1.
- [2] J. Delos, T. Lopez, M.A.M. Hendrix, and E. Alarcon. Compact driver, notably for a light emitting diode, having an auxiliary output, 03 2015. URL https://www.lens.org/lens/patent/WO_2015_040564_A1.
- [3] Robert W Erickson and Dragan Maksimovic. *Fundamentals of power electronics*. Springer Science & Business Media, 2001.
- [4] Weifeng Feng and F.G. Shi. A new switched-capacitor frequency modulated driver for light emitting diodes. *Review of Scientific Instruments*, 78(11): 114701–114701–4, Nov 2007. ISSN 0034-6748. doi: 10.1063/1.2804131.
- [5] M. Kline, I. Izyumin, B. Boser, and S. Sanders. A transformerless galvanically isolated switched capacitor led driver. In *Applied Power Electronics Conference and Exposition (APEC), 2012 Twenty-Seventh Annual IEEE*, pages 2357–2360, Feb 2012. doi: 10.1109/APEC.2012.6166152.
- [6] P. Kumar and W. Proefrock. Novel switched capacitor based triple output fixed ratio converter(tofrc). In *Applied Power Electronics Conference and Exposition (APEC), 2012 Twenty-Seventh Annual IEEE*, pages 2352–2356, 2012.
- [7] Chengrui Le, M. Kline, D.L. Gerber, S.R. Sanders, and P.R. Kinget. A stackable switched-capacitor dc/dc converter ic for led drivers with 90 In *Custom Integrated Circuits Conference (CICC), 2013 IEEE*, pages 1–4, Sept 2013. doi: 10.1109/CICC.2013.6658481.
- [8] Kang-Ho Lee, Young-Jin Woo, Hee-Seok Han, Kwang-Chan Lee, Chang-Seok Chae, and Gyu-Hyeong Cho. Power-efficient series-charge parallel-discharge charge pump circuit for led drive. In *Power Electronics Specialists Conference, 2008. PESC 2008. IEEE*, pages 2645–2649, June 2008. doi: 10.1109/PESC.2008.4592341.
- [9] Vincent Wai-Shan Ng and Seth R. Sanders. *Switched Capacitor DC-DC Converter: Superior where the Buck Converter has Dominated*. PhD thesis, EECS Department, University of California, Berkeley, Aug 2011. URL <http://www.eecs.berkeley.edu/Pubs/TechRpts/2011/EECS-2011-94.html>.
- [10] Michael Douglas Seeman. *A Design Methodology for Switched-Capacitor DC-DC Converters*. PhD thesis, EECS Department, University of California, Berkeley, May 2009. URL <http://www.eecs.berkeley.edu/Pubs/TechRpts/2009/EECS-2009-78.html>.

- [11] Chi-Hao Wu and Chern-Lin Chen. High-efficiency current-regulated charge pump for a white led driver. *Circuits and Systems II: Express Briefs, IEEE Transactions on*, 56(10):763–767, Oct 2009. ISSN 1549-7747. doi: 10.1109/TCSII.2009.2027955.
- [12] Liang Yin, Xiaobo Wu, and Menglian Zhao. A highly efficient switched-capacitor led driver with switching frequency hopping technique. In *Solid-State and Integrated Circuit Technology (ICSICT), 2010 10th IEEE International Conference on*, pages 521–523, Nov 2010. doi: 10.1109/ICSICT.2010.5667352.

Chapter 4

Modeling of Hybrid Switched Capacitor Converters

Switch capacitor converters are circuits composed of a large number of switches and capacitors, and require accurate models to properly design them. SCCs have the peculiarity to be lossy by nature due to the non adiabatic energy transfer between capacitors, a phenomenon not present in the inductor based converters. Generally, the modeling of SCCs focuses just on the description of the loss mechanisms associated to conduction and capacitor charge transfer, neglecting other sources of losses such as driving and switching losses. The modeled mechanisms of losses are proportional to the output current, being normally represented with a resistor in the well-known output resistance model.

This chapter presents an enhancement of the charge flow analysis that extends its use to also cover the H-SCC. The chapter is divided in two sections, the first section is devoted to the study and model of a H-SCC, where the original charge flow analysis [7, 11] is reviewed and extended. Firstly, discussing and identifying the limiting factors of the previous published models. Subsequently, the charge flow analysis is reformulated with a new approach that enables the analysis of the H-SCC. The second section is devoted to the study of multiple outputs H-SCCs, introducing a new circuit model, and its related methodology to obtain the circuit model parameters. The chapter closes summarizing the contributions of the new modeling approach.

4.1 Single Output Converters

Switched Capacitor Converters has been always considered two-port converters with single input and a single output as shown in the block diagram of Figure 4.1. The input port v_i is connected to a voltage source v_{src} , and the output v_o port feeds the load. Where the converter provides a voltage conversion (m) between the two ports that steps up, steps down and/or inverts the polarity of the input voltage. Currently, all available models were only proposed for this two port configuration. That is why, this section is starts to revisit the classical concepts of single output SCCs, helping the reader to to understand the limitations in the old models to cover the H-SCCs. Afterwards, a new modeling approach is introduced, enabling to model the H-SCC.


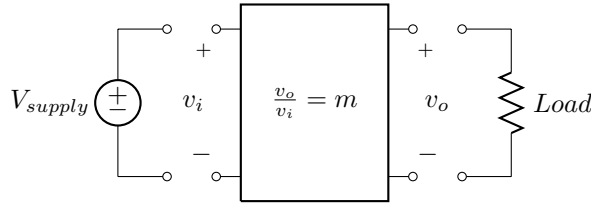


Figure 4.1: Block diagram of a two port SCC.

4.1.1 The Output Resistance Model

Figure 4.2: Output resistance model of a switched capacitor converter.

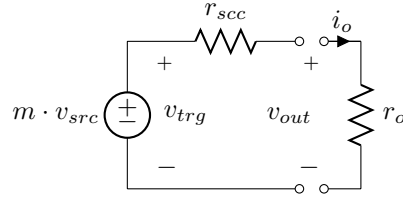

The behavior of SSCs is modeled with the well-known output resistance model [9, 10] that is composed of a controlled voltage source and equivalent resistance r_{scc} , as shown in Figure 4.2. The output voltage provided by the converter under no-load conditions is defined as *target voltage* (v_{trg}). The controlled voltage source provides the target voltage, being the value of voltage supply v_{src} multiplied by the conversion ratio m , thus

$$v_{trg} = m \cdot v_{src}. \quad (4.1)$$

When the converter is loaded, the voltage at the converter's output, v_{out} , drops proportionally with the load current. This effect is modeled with resistor r_{scc} , which accounts for the losses produced in the converter. Since the losses are proportional

to the output current i_o , they can be modeled with a resistor. Using the presented model, the output voltage of the converter can be obtained as

$$v_{out} = m \cdot v_{src} - i_o \cdot r_{scc}. \quad (4.2)$$

In order to solve (4.2), it is necessary to obtain the two parameters of the model from the converter: the conversion ration m and the equivalent output resistance r_{scc} . The first can be easily solved using Kirchhoff's Voltage Laws as previously explained in Section 3.2.1. The second is more complex and actually is the main challenge in the modeling of SCCs.

Currently, there are two different methodologies to infer the equivalent output resistance r_{scc} , plotted in 4.3. On the one hand, S. Ben-Yaakov [2–4] has claimed a generalized methodology based on the analytical solution of each of the different R-C transient circuits of the converter, reducing them to a single transient solution. The methodology achieves a high accuracy, but results in a set of non-linear equations and high complexity for the analysis of advanced architectures. On the other hand, M. Makowski and D. Maksimovic [7] presented a methodology based on the analysis of the charge flow between capacitors in steady-state. The methodology is simple to apply and results in a set of linear expressions easy to operate for further analysis of the converters. Based on the charge flow analysis, M. Seeman [11] developed different metrics allowing to compare performance between capacitive and inductive converters. Although both methodologies are valid for the modeling of SCCs, none of them has been used to model the effects of a loaded *pwm*-node, which is fundamental to the study of H-SCC. The charge flow analysis has a cleaner and simpler way of describing the loss mechanism. For that reason, this methodology has been chosen in this dissertation to model the *hybrid* switched capacitor converter.

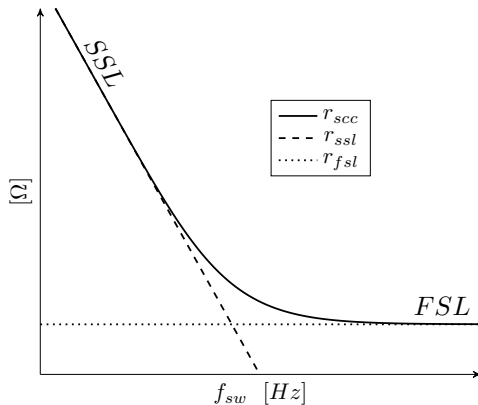


Figure 4.3: SCC Equivalent output resistance r_{scc} as function of the frequency and the two asymptotic limits: *Slow Switching Limit* (SSL) and *Fast Switching Limit* (FSL).

The aforementioned r_{scc} accounts for the loss when the converter is loaded. All losses in the converter are, in fact, dissipated in the resistive elements of the converter: *on*-resistance (r_{on}) of the switches and equivalent series resistance of the capacitors (r_{esr}). The origin and magnitude of the losses depends on the operation

region of the converter, which is a function of the switching frequency as shown in the plot of Figure 4.3. A SCC has two well-defined regimes of operation: the *Slow Switching Limit* (SSL) and the *Fast Switching Limit* (FSL). Each of the two regimes defines an asymptotic limit for the r_{sc} curve. In the SSL, the converter operates at a switching frequency (f_{sw}) much lower than the time constant (τ) of charge and discharge of the converter's capacitors, thereby allowing the full charge and discharge of the capacitors. As shown in Figure 4.4a, the capacitor currents present an exponential-shape waveform. In this regime of operation, the losses are determined by the charge transfer between capacitors, and dissipated in the resistive paths of the converter, mainly in the switches. That is why reducing the switch channel resistance does not decrease the losses. Instead, it will produce sharper discharge current impulses producing higher electromagnetic disturbances. In the SSL, losses are inversely proportional to the product of the switching frequency and the capacitance values, limited by the SSL asymptote as can be seen in Figure 4.3.

In the FSL, the converter operates with a switching frequency (f_{sw}) much higher than the time constant (τ) of charge and discharge of the converter's capacitors, limiting the full charge and discharge transients. As shown in Figure 4.4b, currents have block-shape waveforms. In this operation regime, the losses are dominantly produced by the parasitic resistive elements (r_{on} , r_{esr}), therefore changes in the capacitances or frequency do not modify the produced losses¹. In the FSL, r_{sc} is constant and limited by the FSL asymptote as it can be seen in Figure 4.3.

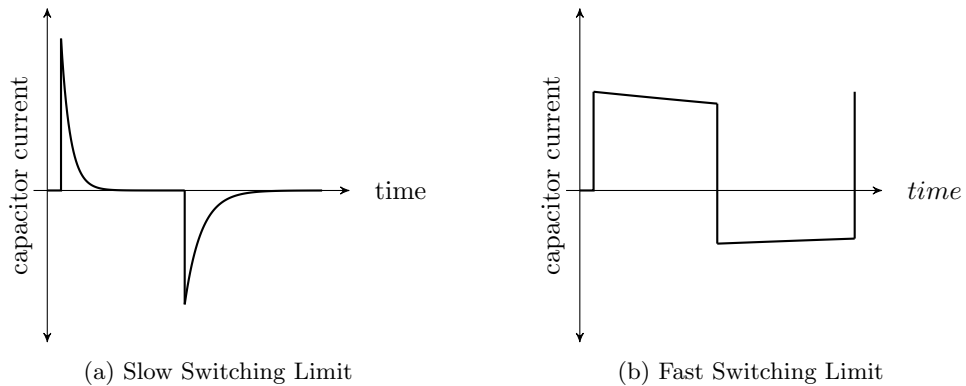


Figure 4.4: Current waveforms through the capacitors in each of the two operation regimes.

¹The switching losses are not included in the modeling of r_{sc} .

4.1.2 Revising the charge flow analysis approach

The charge flow analysis is based on the conservation of charge in the converter's capacitors during an entire switching period in steady state [7]. Under this conditions, the converter is studied in the two well-defined operating regimes: the Slow Switching Limit (SSL) and the Fast Switching Limit (FSL). In SSL, losses are then dominated by the charge transfer between the capacitors, therefore only the charge transfer loss mechanisms are studied. In FSL, losses depend on the conduction through the parasitic resistive elements, therefore only the conduction losses are studied. This division in the study of the converter reduces the complexity of the problem and enables a simplified still very accurate analysis.

The charge flow analysis uses charges instead of currents. Actually being precise, the analysis is done using the so-called *charge flow multipliers*, which consist of a normalization of the charges with respect to the total charge delivered at the converter's output (q_{out}), hence

$$a_x = \frac{q_x}{q_{out}},$$

where a_x is the charge flow multiplier corresponding of the charge q_x flowing through the x -th circuit element of the converter.

4.1.3 Load Model: Voltage Sink versus Current Sink

?? In order to model a SCC, the original charge flow method [7] makes three main assumptions:

1. The load is modeled as an ideal voltage source since it is normally connected to the *dc*-output in parallel with a large capacitor, as shown in Figure 4.5a. This assumption, eliminates the capacitor connected in parallel with the load, neglecting the effect of this output capacitor on the equivalent output resistance.
2. The model only considers the *dc*-output as the single load point of the converter, imposing a unique output to the converter.
3. The duty cycle is not included in the computation of the capacitor charge flow. Consequently, the modulation of the switching period is assumed to have no influence on the amount of charge flowing in the capacitors, leading in an accuracy of the SSL region for duty cycles different than the 50%.

These assumptions reduce the accuracy and flexibility to model different concepts of the SCCs, including the H-SCCs (previously introduced in Chapter 3). In order to overcome these limitations, the presented methodology makes two different assumptions:

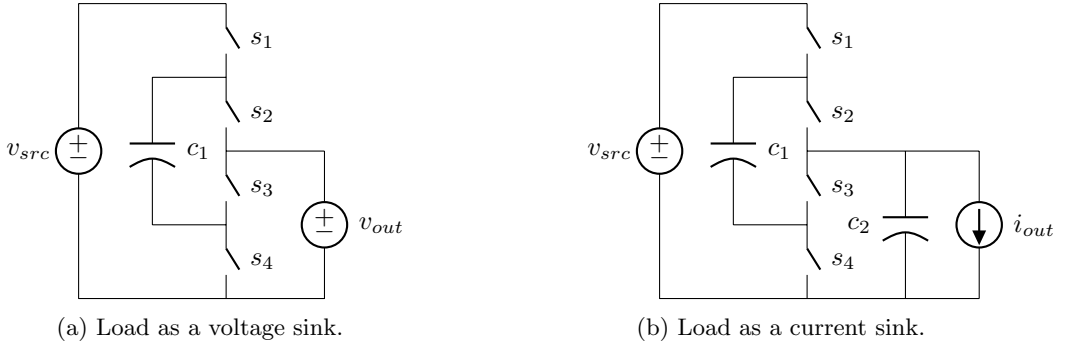


Figure 4.5: Two load models for the charge flow analysis.

1. The load is assumed to be a constant current sink with a value equal to the average load current, as shown in Figure 4.5b. Using this approach the charge delivered to the load can be evaluated for each switching phase j as

$$q_{out}^j = D^j \frac{i_{out}}{f_{sw}} = D^j i_{out} T_{sw} = D^j q_{out}, \quad (4.3)$$

where i_{out} is the average output current and D^j is the duty cycle corresponding to the j -th phase.

2. Any of the converter nodes can be loaded. Since the load is modeled as a current sink, it can now be connected to any of the converter nodes without biasing it.
3. When the load is connected to a dc -node the associated dc -capacitor of the node is no longer neglected, thus the effects of the output capacitor are included in the equivalent output resistance.

4.1.4 Re-formulating the charge flow analysis

The equivalent output impedance encompasses the basic root losses produced in the converter due to capacitor charge transfer and charge conduction. As aforementioned, the original charge flow analysis [7] assumes an infinitely large output capacitance in parallel with the load. This assumption leads to inaccuracies in the prediction of the equivalent output resistance when the output capacitor is comparable in value to the flying capacitors [12]. Actually, the root cause for this inaccuracy lies in the wrong quantification of the charges that produces losses in the converter.

Looking in detail to the charge flow in a SCC, we can identify two different charge flows during each circuit mode:

Redistributed charge flows between capacitors in order to equalize their voltage differences, by evaluating them the capacitor transfer losses can be obtained.

This charge flow is associated with a charge or discharge of the capacitors, happening right after the switching event and lasting for a short period of time².

Pumped charge flows from the capacitors to the load, where it is consumed by the load, hence producing useful work. This charge delivery is associated with a discharge of the capacitors, lasting for the entire phase time.

Besides these two charge flows, there is a third *theoretical* charge flow that is necessary to analyse and solve a SCC:

Net charge flow is quantified based on the principle of *capacitor charge balance* for a converter in steady state. Based on that principle all *net* charges in the capacitors can be obtained applying Kirchhoff's Currents Law (KCL), but using charges instead of currents. Therefore, the circuit can be solved for *net* charge flow, applying the *capacitor charge balance* as

$$\forall c_i : \sum_{j=1}^{phases} q_i^j = 0, \quad (4.4)$$

The resulting charges are then gathered in the charge flow vector \mathbf{a} as

$$\mathbf{a}^j = \begin{bmatrix} a_{in}^j & a_1^j & a_2^j & \cdots & a_n^j \end{bmatrix} = \frac{\begin{bmatrix} q_{in}^j & q_1^j & q_2^j & \cdots & q_n^j \end{bmatrix}}{q_{out}}, \quad (4.5)$$

where the superindex denotes the j -th phase, q_{in} is the charge supplied by the voltage source and q_i is the *net* charge flowing in the i -th capacitor c_i . Notice that the vector is composed by charge flow multipliers, being the charges normalized with respect to total output charge q_{out} .

The loss mechanisms of SCCs can be better understood based on the *redistributed* and *pumped* charge flows. For instance Figure 4.6 shows the charge flows for a 3:1 Dickson converter with a infinitely large output capacitor c_3 . In such a converter, the charge flow through capacitors c_1 and c_2 is always either redistributed between them or towards the big capacitor c_3 , and only capacitor c_3 supplies charge to the load. Therefore since the flowing charge in c_1 and c_2 is always transferred between capacitors, it produces losses and it never supplies directly the load. However, for a finite value of the output capacitor, or for converters loaded from an internal node, there is always the probability that all capacitors contribute to pumping charge to the load [12]; phenomenon that was not considered in the initial charge flow analysis. In another scenario, the one of Figure 4.7, a 3:1 H²-Dickson has its load connected to the second *pwm*-node. In such a converter, there is a redistributed

²The duration of the charge depends on the time constant of the associated R-C circuit.

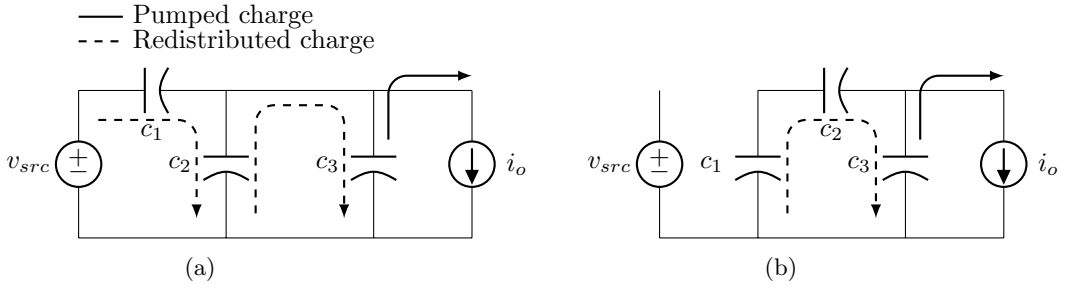


Figure 4.6: Charge flows in a Dickson 3:1 converter when loaded at a *dc*-node with an infinitely large output capacitor c_3 during the two switching phases.

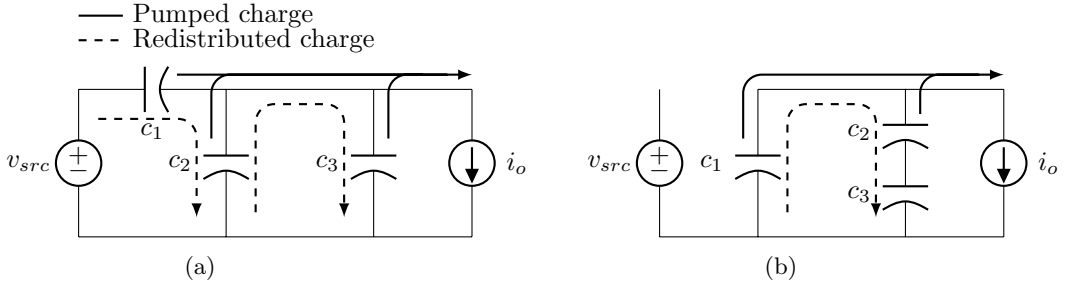


Figure 4.7: Charge flows in a Dickson 3:1 converter when loaded at one of the *pwm*-nodes during the two switching phases.

charge flow between the different capacitors as in the previous case, but at the same time, all capacitors pump charge to the load as well. Therefore all capacitors contribute in delivering charge to the load, which actually reduces the equivalent output impedance of the converter.

The original charge flow analysis only uses the *net* charge flow in order to quantify the produced losses in the SSL region, which in fact results in an over estimation of the charge flow responsible for the losses (the *redistributed* charge flow). The methodology proposed in this dissertation identifies these different charge flows, and achieves a closer estimation of the losses in the converter by independently quantifying each of them. The nature and effects of the three different charge flow can be better analysed and understood by looking at the voltage waveforms in the converter capacitors during an entire switching cycle. From Figure 4.8, we can associate the voltage ripples to the previously defined charge flows:

Net voltage ripple Δv_n is the voltage variation measured at the beginning and at the end of each of the switching events (*on*→*off*, *off*→*on*). As a matter of fact, this *net* ripple is associated with the *net* charge flow, therefore using

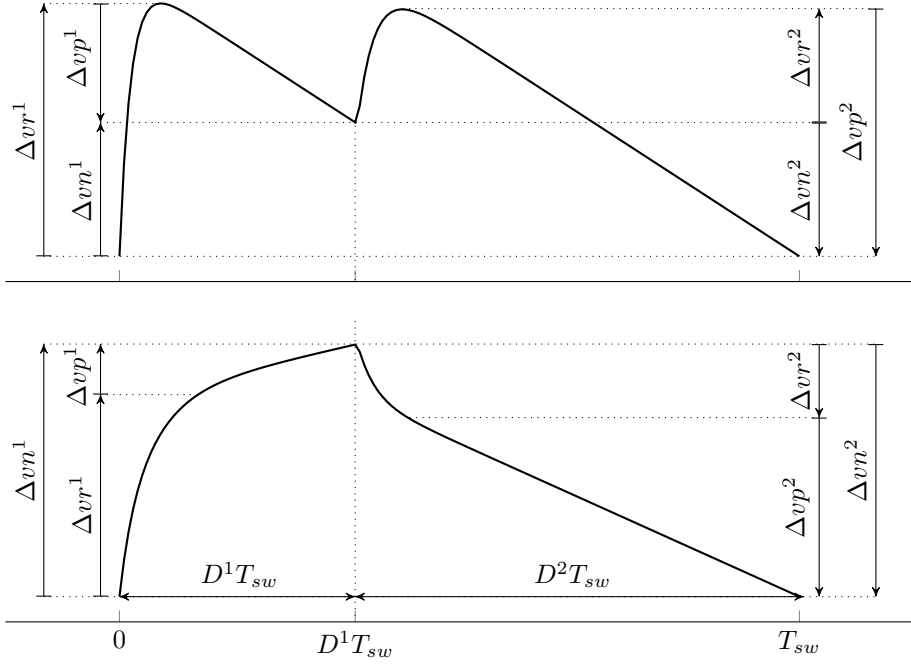


Figure 4.8: Two possible voltage waveforms that show the capacitors in a SCC. Ripples are associated with the charge flow mechanisms: top) unipolar capacitor discharge (DC capacitor); bottom) bipolar capacitor discharge (flying capacitor).

(4.5) the *net* voltage ripple can be formulated as

$$\Delta vn_i^j = \frac{q_i^j}{c_i} = \frac{a_i^j}{c_i} q_{out}. \quad (4.6)$$

Notice that the capacitor charge balance principle is reflected in the *net* voltage ripple of Figure 4.8. The sum of all *net* ripples in each capacitor during a switching cycle must be zero. Which explains why $\Delta vn^1 = \Delta vn^2$ in the two-phase converter used in the example of Figure 4.8.

Pumped voltage ripple Δvp is the voltage variation associated with the discharge of the capacitor by a constant current. Thanks to modeling the load as current sink, the *pumped* ripple can be associated to a linear voltage discharge, thus the *pumped* ripple can be obtained for each switching phase as

$$\Delta vp_i^j = D^j \frac{i_i^j}{c_i} T_{sw}, \quad (4.7)$$

where i_i^j is the current flowing through the i -th capacitor c_i . Actually, the

current flowing in each individual capacitor c_i during each j -th phase is a function of the output current, therefore it can be expressed as a function of i_{out} as

$$i_i^j = b_i^j i_{out}, \quad (4.8)$$

where b_i^j is a constant obtained from determining the currents in each circuit mode of the converter. Replacing (4.8) and (4.3) into (4.7), the *pumped* voltage ripple can be expressed in the charge flow notation as

$$\Delta v p_i^j = D^j \frac{b_i^j}{c_i} i_{out} T_{sw} = D^j \frac{b_i^j}{c_i} q_{out}. \quad (4.9)$$

Like in the previous case, the b_i^j elements are gathered in the *pumped* charge flow vector \mathbf{b} as

$$\mathbf{b}^j = \begin{bmatrix} b_1^j & b_2^j & \dots & b_n^j \end{bmatrix} = \frac{\begin{bmatrix} i_1^j & i_2^j & \dots & i_n^j \end{bmatrix}}{i_{out}}, \quad (4.10)$$

where the j denotes the circuit phase, i_i is the *pumped* current flowing in the i -th capacitor c_i . The vector is normalized with respect to the output current i_{out} .

Redistributed ripple Δvr is the voltage variation associated to a transient exponential charge or discharge. It is produced by the charge redistribution between capacitors and happens just after each switching event. The *redistribution* ripple can be quantified by the addition of the two previous defined ripple types as

$$\Delta v n_i^j = \Delta v p_i^j + \Delta v r_i^j. \quad (4.11)$$

Substituting (4.6) and (4.9) into (4.11), the *redistributed* ripple is formulated in terms of the charge flow analysis, as

$$\Delta v r_i^j = \frac{q_{out}}{c_i} \left[a_i^j - D^j b_i^j \right] = \frac{q_{out}}{c_i} g_i^j, \quad (4.12)$$

where g_i^j is the *redistributed* charge flow of the j -th phase and the i -th capacitor. The *redistributed charge flow vector* \mathbf{g} is actually defined as

$$\mathbf{g}^j = \mathbf{a} \mathbf{c}^j - D^j \mathbf{b}^j, \quad (4.13)$$

where $\mathbf{a} \mathbf{c}$ is the *capacitor charge flow vector*, a sub-vector of \mathbf{a} that only contains the charge flow multiplier associated to the capacitors.

In conclusion, in order to study a SCC is necessary to obtain the three charge flow vectors from a converter, which is presented in the following section.

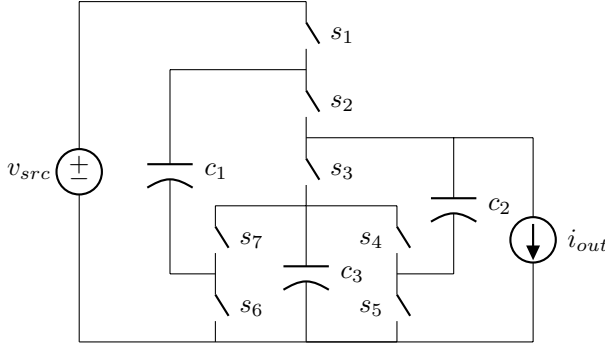


Figure 4.9: 3:1 H²-Dickson with the load connected to the second *pwm*-node.

4.1.5 Solving the charge flow vectors

The charge flow vectors are solved for the converter of Figure 4.9, a 3:1 H²-Dickson loaded at second node, in two steps. First are solved the *net* charge flow vectors. Second are solved the *pumped* charge flow vectors. As aforementioned, the *net* charge flow vectors are determined by solving the converter applying the capacitor charge balance condition (4.4). Therefore considering the two circuit modes of the converter, shown in Figure 4.10, the converter can be solved by creating a single system of linear equations. The node equations for the first phase (Figure 4.10a) are:

$$\begin{aligned} q_{in}^1 - q_1^2 &= 0, \\ q_1^2 - q_2^1 - q_3^1 - q_{out}^1 &= 0. \end{aligned} \quad (4.14)$$

The node equations for second circuit mode (Figure 4.10b) are:

$$\begin{aligned} q_{in}^2 &= 0, \\ q_2^2 - q_3^2 &= 0, \\ q_1^2 - q_2^2 - q_{out}^2 &= 0. \end{aligned} \quad (4.15)$$

Applying (4.3) into q_{out}^1 and q_{out}^2 , the phase output charges are expressed as function of the total output charge q_{out} , as

$$\begin{aligned} q_{out}^1 &= D q_{out}, \\ q_{out}^2 &= (1 - D) q_{out}, \end{aligned} \quad (4.16)$$

where D corresponds to the duty cycle of odd switches. The charge flow in the capacitors are constrained to the null charge balance condition of (4.4), hence

$$\forall c_i : \sum_{j=1}^{phases} q_i^j \rightarrow \begin{cases} q_1 \leftarrow q_1^1 = -q_1^2 & \text{for } c_1; \\ q_2 \leftarrow q_2^1 = -q_2^2 & \text{for } c_2; \\ q_3 \leftarrow q_3^1 = -q_3^2 & \text{for } c_3. \end{cases} \quad (4.17)$$

Substituting (4.16) and (4.17) into (4.14) and (4.15), we can formulate a system of linear equations as

$$\begin{cases} q_{in}^1 - q_1 & = 0 \\ q_{in}^2 & = 0 \\ q_1 - q_2 - q_3 & = Dq_{out} \\ q_1 + q_2 & = -(1-D)q_{out} \\ q_2 - q_3 & = 0 \end{cases}, \quad (4.18)$$

solving the system yields

$$\begin{aligned} q_{in}^1 = q_1 &= \frac{2-D}{3}q_{out}, \\ q_2 = q_3 &= \frac{1-2D}{3}q_{out}. \end{aligned} \quad (4.19)$$

Substituting (4.19) into (4.5), the solution is presented in charge flow vector form, resulting in

$$\mathbf{a}^1 = \frac{1}{3} \begin{bmatrix} 2-D & 2-D & 1-2D & 1-2D \end{bmatrix}, \quad (4.20)$$

$$\mathbf{a}^2 = \frac{1}{3} \begin{bmatrix} 0 & D-2 & 2D-1 & 2D-1 \end{bmatrix}. \quad (4.21)$$


The *pumped* charge flow multipliers are obtained by individually solving the currents in each circuit mode. For sake of brevity, only the circuit associated to the first mode of the converter will be solved in detail. The sing conventions for voltages and currents are defined in Figure 4.10a, but instead of using charges q_x the circuit will be solved for currents i_x . We can formulate two node equations,

$$i_{in} - i_1 = 0, \quad (4.22)$$


$$i_1 - i_2 - i_3 - i_{out} = 0, \quad (4.23)$$

and two more mesh equations

$$\begin{aligned} v_{src} - v_1 - v_2 &= 0, \\ v_2 - v_3 &= 0. \end{aligned} \quad (4.24)$$

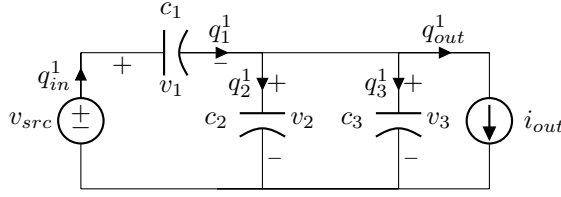

(a) First mode, odd switches are closed and even switches are open.

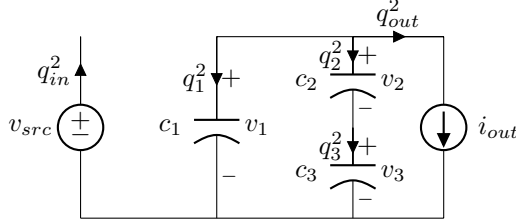

(b) Second mode, even switches are closed and odd switches are open.

Figure 4.10: The two switching modes of 3:1 H-Dickson of Figure 3.9

Owing to the fact that the relation current-voltage in a capacitor is $c \frac{dv}{dt} = i$, and using the mesh equations (4.24), we can define the relations between currents as follows

$$\begin{aligned} i_2 &= i_1 \frac{c_2}{c_1}, \\ i_3 &= i_2 \frac{c_3}{c_2} = i_1 \frac{c_3}{c_1}. \end{aligned} \quad (4.25)$$

Substituting (4.25) into (4.23) and isolating i_1 , we obtain the *pumped* charge flow multiplier for c_1 phase 1:

$$i_1 = i_o \frac{c_1}{c_1 + c_2 + c_3} = i_o b_1^1. \quad (4.26)$$

The rest of the *pumped* charge multipliers can be found solving for the remaining currents, and for the other circuit modes. Arranging them in the corresponding vector form, will result i:

$$\begin{aligned} \mathbf{b}^1 &= \frac{1}{\beta_1} \begin{bmatrix} c_1 & -c_2 & -c_3 \end{bmatrix} & \beta_1 &= c_1 + c_2 + c_3, \\ \mathbf{b}^2 &= \frac{-1}{\beta_2} \begin{bmatrix} c_1 c_2 + c_1 c_3 & c_2 c_3 & c_2 c_3 \end{bmatrix} & \beta_2 &= c_1 c_2 + c_1 c_3 + c_2 c_3. \end{aligned} \quad (4.27)$$

4.1.6 Slow Switching Limit Equivalent Resistance

The SSL equivalent output resistance r_{ssl} accounts for the losses produced by the capacitor charge transfer, therefore r_{scc} can be obtained by evaluating the losses

in the capacitors. The energy lost in a charge or discharge of capacitor c is given by

$$E_{loss} = \frac{1}{2} c \Delta v_c^2. \quad (4.28)$$

where Δv_c is the voltage variation in the process. Previously, we defined that the *re-distributed* ripple is associated with the capacitor charge transfer. Therefore, substituting (4.12) into (4.28), we obtain the losses due to capacitor charge transfer

$$E_i^j = \frac{1}{2} (\Delta v r_i^j)^2 c_i = \frac{1}{2} \frac{q_{out}^2}{c_i^2} [a_i^j - D^j b_i^j]^2 c_i = \frac{1}{2} \frac{q_{out}^2}{c_i} [a_i^j - D^j b_i^j]^2. \quad (4.29)$$

The total power loss in the circuit is the sum of the losses in all of the capacitors during each phase multiplied by the switching frequency f_{sw} . This yields

$$P_{ssl} = f_{sw} \sum_{i=1}^{caps. phases} \sum_{j=1} E_i^j = \frac{f_{sw} q_{out}^2}{2} \sum_{i=1}^{caps. phases} \sum_{j=1} \frac{1}{c_i} [a_i^j - D^j b_i^j]^2. \quad (4.30)$$

The losses can be expressed as the output SSL resistance, dividing (4.30) with the square of the output current as

$$r_{ssl} = \frac{P_{ssl}}{i_o^2} = \frac{P_{ssl}}{(f_{sw} q_{out})^2} = \frac{1}{2 f_{sw}} \sum_{i=1}^{caps. phases} \sum_{j=1} \frac{1}{c_i} [a_i^j - D^j b_i^j]^2. \quad (4.31)$$

4.1.7 Fast Switching Limit Equivalent Resistance

The fast switching limit (FSL) equivalent output resistance r_{fsl} accounts for losses produced in the resistive circuit elements, being the *on*-resistance of the switches and the Equivalent Series Resistance (ESR) of the capacitors $r_{esr,c}$.

The power dissipated by a resistor r_i from a square-wave pulsating current is given by

$$P_{r_i} = r_i D^j i_i^2, \quad (4.32)$$

where D^j is the duty cycle. The value of i_i (peak current) though the resistor can be also defined by its flowing charge q_i as

$$i_i = \frac{q_i}{D^j T_{sw}} = \frac{q_i}{D^j} f_{sw}. \quad (4.33)$$

As outlined in [11], the charge flowing through the parasitic resistive elements can be derived from the charge flow vectors (**a**), providing the *switch*³ charge flow vectors

³These charge flow vectors also account for other resistive elements, not only the switches, such as the capacitors equivalent series resistance. Nevertheless they are called after the switches since they are the dominant resistive elements in the design of a converter.

ar. Using the *switch* charge flow multiplier, (??) can be redefined as function of the output charge (or the output current) as

$$i_i = \frac{ar_i^j}{D^j} q_{out} f_{sw} = \frac{ar_i^j}{D^j} i_{out}. \quad (4.34)$$

Substituting (4.34) into (4.32) yields

$$P_{r_i} = \frac{r_i}{D^j} ar_i^{j^2} i_{out}^2, \quad (4.35)$$

the total loss accounting all resistive elements and phases is then

$$P_{fsl} = \sum_{i=1}^{elm. phs.} \sum_{j=1} \frac{r_i}{D^j} ar_i^{j^2} i_{out}^2, \quad (4.36)$$

dividing by i_{out}^2 yields the FSL equivalent output resistance:

$$r_{fsl} = \sum_{i=1}^{elm. phases} \sum_{j=1} \frac{r_i}{D^j} ar_i^{j^2} \quad (4.37)$$

where r_i is the resistance value of the i -th resistive element.

4.1.8 Equivalent Switched Capacitor Converter Resistance

With the goal of obtaining a simple design equation, a first analytical approximation of r_{sc} in [1, 8] was given as

$$r_{sc} \approx \sqrt{r_{ssl}^2 + r_{fsl}^2}, \quad (4.38)$$

being used in all the presented results of this dissertation. Due to the *arbitrary*

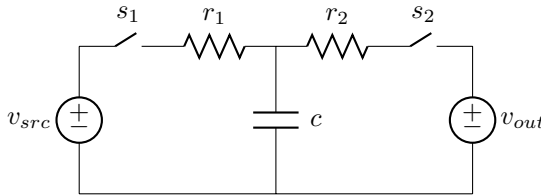



Figure 4.11: 1:1 SCC used as a reference circuit for the *Makowski* approximation.

of the first approximation, Makowski proposed, in a recent publication [6], a new approximation using a more rigorous approach given by

$$r_{sc, Mak} \approx \sqrt[{\mu}]{r_{ssl}^{\mu} + r_{fsl}^{\mu}}, \quad (4.39)$$

with $\mu = 2.54$.

Figure 4.12: Graphic demonstration of the *Minkowski distance* p between the two asymptotic limits (r_{ssl} and r_{fsl}), and the closed form (CF) of r_{scc} .

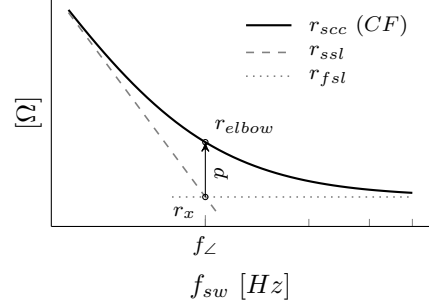

As shown in Figure 4.12, the *Makowski* formulation is based on solving the *Minkowski distance* form

$$r_{elbow} = (r_x^\mu + r_x^\mu)^{\frac{1}{\mu}} = 2^{\frac{1}{\mu}} r_x = p r_x \quad (4.40)$$

at the corner frequency f_\angle where $r_x = r_{ssl} = r_{fsl}$, for a single capacitor under periodic and symmetric ($D = 50\%$) voltage square excitation in steady-state (see schematic in Figure 4.11). The r_{scc} closed form (CF) of the circuit used in to the approximation is

$$r_{scc} = \frac{1}{2 c f_{sw}} \left[\frac{e^{\frac{D}{\tau_1 f_{sw}}} + 1}{\frac{D}{e^{\tau_1 f_{sw}}} - 1} + \frac{e^{\frac{1-D}{\tau_2 f_{sw}}} + 1}{\frac{1-D}{e^{\tau_2 f_{sw}}} - 1} \right], \quad (4.41)$$

$$\tau_1 = r_1 c, \quad (4.42)$$

$$\tau_2 = r_2 c. \quad (4.43)$$

A correction of the Makowski is proposed to cover the variations in the duty cycle by solving μ is as a function of D , as

$$p = \frac{1}{2} \left[\frac{e^{\frac{1}{D}+1}}{e^{\frac{1}{D}-1}} + \frac{e^{\frac{1}{1-D}+1}}{e^{\frac{1}{1-D}-1}} \right], \quad (4.44)$$

$$\mu = \frac{1}{\log_2 p}. \quad (4.45)$$

An initial assessment of the different approximations is given for the circuit of Figure 4.11 used as a reference in this new formulation. The results are presented for two different scenarios:

- Converter with homogenous time constants, thus $\tau_1 = \tau_2$, reproducing the scenario assumed for the new formulation.
- Converter with heterogenous time constants, thus $10\tau_1 = \tau_2$, reproducing a case with a less idealized converter.

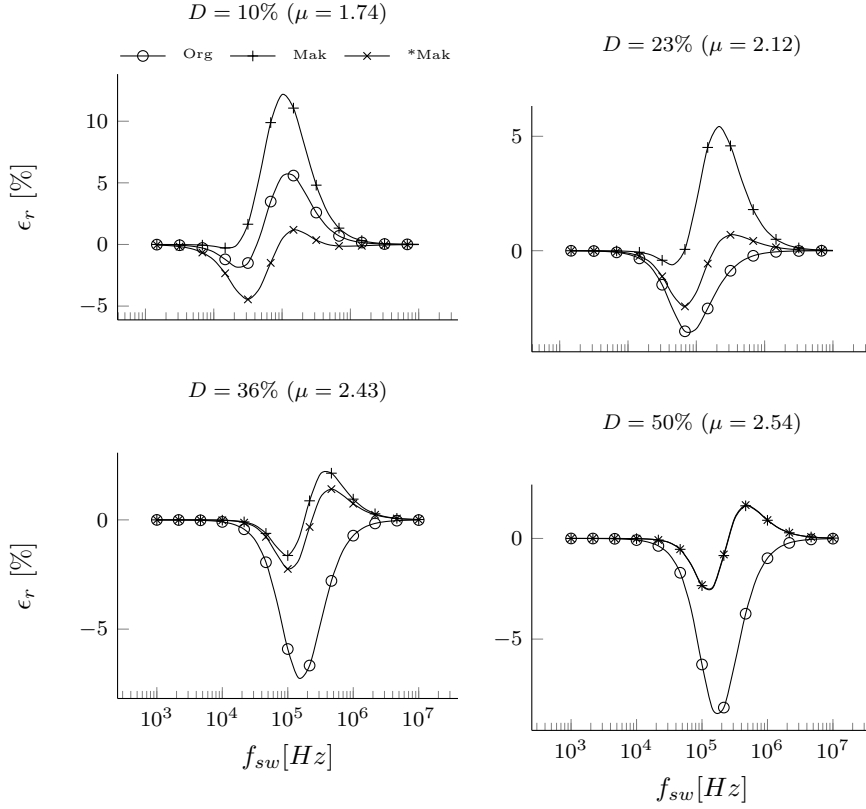


Figure 4.13: Relative error of a single capacitor switching with homogenous τ constants between the closed form of r_{sc} and the different approximations: *Org* - Original, *Mak* - Makowski and **Mak* - rectified Makowski. Solved for the circuit in Figure 4.11 with $c = 1\mu F$ and $r_1 = r_2 = 1\Omega$.

Giving the relative error between the closed form solution (4.43) and the three approximations: Original (*Org.*), Makowski (*Mak.*), and rectified Makowski (**Mak*). In the first case, Figure 4.13, with homogenous time constants. The *rectified Makowski* formulation presents the best results for all four tested duty cycles, obviously matching the *Makowski* approximation for $D = 50\%$. The *Original* approximation is the second best approximation for the two small values of D , since μ is closer to 2.

This improved accuracy that presents the *rectified Makowski* approximation, changes as the τ constants of the converter diverge from each other, as happens in the second scenario of Figure 4.14. In this case, the *Original* approximation keeps ϵ_r below $\pm 5\%$, but for $D = 10\%$ it rises about -9% . *Makowski* approximation is the best in the lowest $D = 10\%$, but it becomes the worst for the other D values, rising above

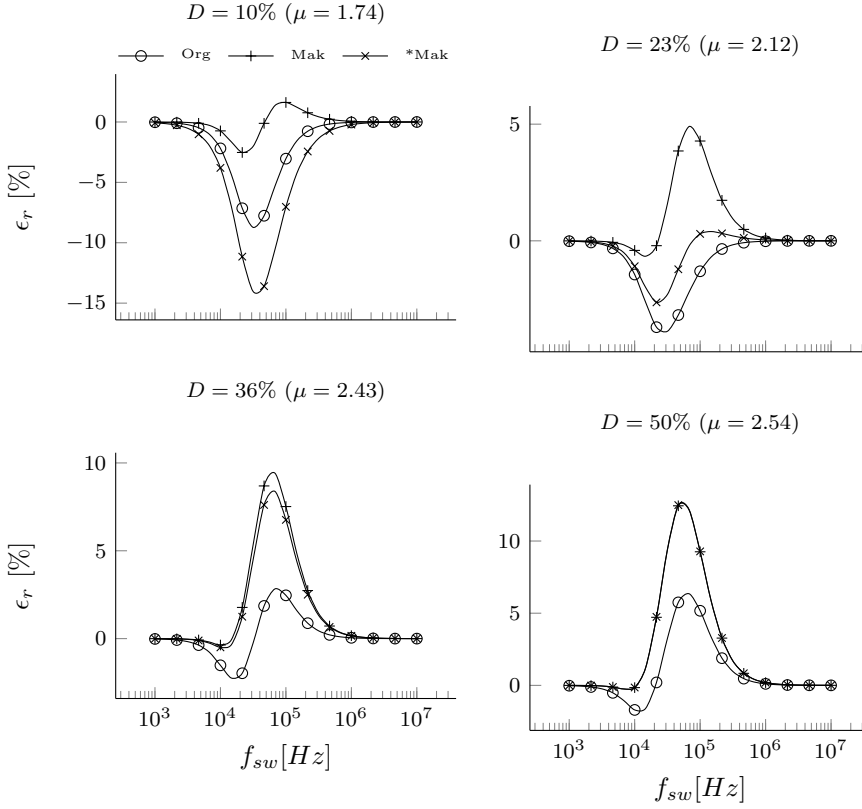


Figure 4.14: Relative error of a single capacitor switching with heterogenous τ constants ($10\tau_1 = \tau_2$) between the closed form of r_{sc} and the different approximations: *Org* - Original, *Mak* - Makowski and **Mak* - rectified Mackowski. Solved for the circuit in Figure 4.11 with $c = 1\mu F$ and $r_1 = r_2 = 10\Omega$.

5%. *Rectified Makowski* is the best for $D = 23\%$, but it rises about 10% for other values of D . Looking at this second scenario, the *Original* formulation would be the preferred one since it keeps the error within the lowest boundaries for all simulated D values. The results of Figures 4.13 and 4.14 are only given for a range of D between 0% and 50%, since $p(D)$, eq. (4.44), is symmetric about $D = 50\%$.

Considering the results none of them shows a clear advantage with respect to the others. Actually, the *Makowski* approximations obtains the μ values from a the correlation between *Minkowski distance* for a specific converter. Therefore, as the converter under study diverges from the reference circuit, the accuracy of the new approximations decreases, becoming even worst that the original formulation. That is why using the *Makowski* formulation to obtain μ values for complex SCCs and H-

SCCs, can be as arbitrary as it was to use the initial proposed value of $\mu = 2$.

4.1.9 Conversion ratio

The conversion ratio of the converter can be computed with the source *net* charge multiplier, first element in \mathbf{a}^j , as

$$m = \frac{v_{trg}}{v_{src}} = \sum_{j=1}^{phases} a_{in}^j. \quad (4.46)$$

For instance, we can obtain the conversion ratio of the converter 3:1 H-Dickson of Figure 4.9 used in the previous example, applying (4.46) in the already solved \mathbf{a} vectors of (4.21), resulting in

$$m_2 = \sum_{j=1}^2 a_{in}^j = \frac{2-D}{3} + 0 = \frac{2-D}{3}, \quad (4.47)$$

where the subscript in m refers to the second node of the converter. Notice that the result coincides with the conversion ratio obtained in the previous chapter (3.12), where the same converter was solved using a different approach.

4.2 Multiple Output Converter

Another advantage that SCC offers is to provide multiple outputs using a single SCC stage. In this multi-port configuration, the energy supply is connected to input port, and the converter provides multiple output ports with different conversion ratios. A clear application was presented by Kumar and Proefrock in [5] with the Triple Output Fixed Ratio Converter (TOFRC); where a 2:1 Ladder converter combined with two inductors provides three fixed output voltages using a single SCC stage.

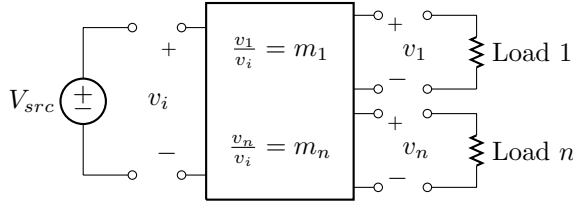


Figure 4.15: Block diagram of a general multiple output port configuration of a Switched Capacitor Converter.

4.2.1 The Output Trans-Resistance Model

When considering a converter with multiple outputs, the load effects have to be taken into account for all the outputs. Actually, when the converter is loaded, it produces a voltage drop throughout outputs of the converter. Therefore, the output current of one output node has an influence to the other outputs. In order to model these effects a new model based on trans-resistance parameters is proposed.

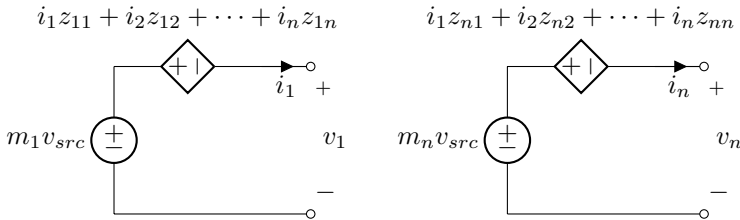


Figure 4.16: Output trans-resistance model of a switched capacitor converter.

The proposed model is shown in Figure 4.16; as it can be seen, each output is represented using two controlled voltage sources connected in anti-series. One source provides the *target voltage* associated with the output, taking the value from the

input voltage, v_{src} , multiplied by the respective conversion ratio associated to that output, m_x .

The other source, produces a voltage droop associated with the losses in the converter. The current delivered by each loaded node adds a specific contribution to the converter losses. Therefore, this voltage source takes the value given by the linear combination of all the converter output currents weighted by their associated trans-resistance factor z .

The trans-resistance factor z_{xy} produces a voltage drop at the output x proportional to the charge (*i.e.* current) delivered by the output y . It can be seen that the trans-resistance factor z_{xx} corresponds to the voltage drop of the same output where the current is delivered, thus this parameter is the output impedance for that node. Since all the trans-resistance factors relate current to voltage, they are in *Ohms*.

With the proposed model, the converter behavior can be described as

$$\mathbf{v_o} = -\mathbf{Z} \cdot \mathbf{i_o} + \mathbf{m} \cdot v_{src}, \quad (4.48)$$

where \mathbf{Z} is the *trans-resistance matrix*.

4.2.2 Power losses and trans-resistance parameters

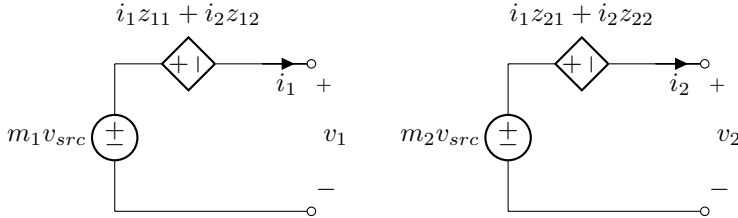


Figure 4.17: Two output converter.

Using the trans-resistance matrix \mathbf{Z} the losses of the converter can be computed. For a two output converter, modeled as shown in Figure 4.17, the losses associated to each output would be

$$P_{o1} = i_1^2 z_{11} + i_1 i_2 z_{12} \quad (4.49)$$

$$P_{o2} = i_1 i_2 z_{21} + i_2^2 z_{22}, \quad (4.50)$$

and the total converter losses are

$$P_{total} = i_1^2 z_{11} + i_2^2 z_{22} + i_1 i_2 z_{12} z_{21}. \quad (4.51)$$

Using the the charge flow analysis described in the previous section, the total losses of a two output converter can be computed as well. In order to make the analysis

less cumbersome, the phases are eluded and losses are computed in a single capacitor for the SSL region. The results can be extended for any converter with any number of phases and capacitors.

In the case of a multiple-output converter, each of the individual outputs produces a *redistributed* charge flow through the capacitors that can be individually quantified, being $g_{i,1}$ the *redistributed* charge flow multiplier associated to the first output, $g_{i,2}$ associated to the second output. The total *redistributed* charge is the sum of each individual contributions as

$$g_i = (g_{i,1} q_{o,1} + g_{i,2} q_{o,2}). \quad (4.52)$$

Substituting (4.52) in (4.30) the losses produced in capacitor c_i of the two output converter are

$$P_{c_i} = f_{sw} \frac{1}{2 c_i} (g_{i,1} q_{o,1} + g_{i,2} q_{o,2})^2. \quad (4.53)$$

expanding terms and substituting $q_{o,1} = i_1/f_{sw}$ and $q_{o,2} = i_2/f_{sw}$ into (4.53) yields

$$P_{c_i} = \frac{1}{2 f_{sw} c_i} (i_1^2 g_{i,1}^2 + i_2^2 g_{i,2}^2 + 2 i_1 i_2 g_{i,1} g_{i,2}). \quad (4.54)$$

It can be seen that the trans-resistance parameters of (4.51) can be directly matched with the *redistributed charge flow multipliers* in (4.54) as

$$\begin{aligned} z_{11} &= g_{i,1}^2 / 2 f_{sw} c_i & [\Omega] \\ z_{22} &= g_{i,2}^2 / 2 f_{sw} c_i & [\Omega] \\ z_{12} + z_{21} &= g_{i,1} g_{i,2} / f_{sw} c_i & [\Omega] \end{aligned}$$

Therefore the general expressions of the SSL trans-resistance parameters are given as a function of the *redistributed charge multipliers* as

$$z_{ssl,xx} = \frac{1}{2 f_{sw}} \sum_{i=1}^{caps.} \sum_{j=1}^{phas.} \frac{(g_{i,x}^j)^2}{c_i}. \quad (4.55)$$

$$z_{ssl,xy} + z_{ssl,yx} = \frac{1}{f_{sw}} \sum_{i=1}^{caps.} \sum_{j=1}^{phas.} \frac{g_{i,x}^j g_{i,y}^j}{c_i}. \quad (4.56)$$

The same analysis can be done for the FSL, but in this case the losses are compute for a single resistor. As in the SSL case of a multiple-output converter, each of the individual outputs produces a charge flow through the switches that can be individually quantified, being $ar_{i,1}$ associated to the first output, $ar_{i,2}$ associated

to the second output, etc. The total *switch* charge multiplier is the sum of each individual *switch* multiplier as

$$ar_i = (ar_{i,1} q_{o,1} + ar_{i,2} q_{o,2}). \quad (4.57)$$

Substituting (4.57) in (4.30), the power dissipated in r_i of the two output converter results in

$$P_{r_i} = \frac{r_i}{D} (i_1^2 ar_{i,1}^2 + i_2^2 ar_{i,2}^2 + 2 i_1 i_2 ar_{i,1} ar_{i,2}), \quad (4.58)$$

leading to a similar polynomial solution of the previous case. Hence the general expressions for the FSL trans-resistance parameters are

$$z_{fsl,xx} = \sum_{i=1}^{swts. phas.} \sum_{j=1} \frac{r_i}{D^j} \left(ar_{i,x}^j \right)^2, \quad (4.59)$$

$$z_{fsl,xy} + z_{fsl,yx} = \sum_{i=1}^{swts. phas.} \sum_{j=1} \frac{r_i}{D^j} ar_{i,x}^j ar_{i,y}^j, \quad (4.60)$$

Notice that (4.56) and (4.60) do not provide the individual expressions for the cross trans-resistance parameters z_{xy} and z_{yx} . Actually, the individual quantification of these parameters is related to the sequence order of the different circuit modes for the converter, but this relation has not yet been founded⁴. Fortunately, two-phase converters do not have cardinality in the sequence of the switching modes, resulting in symmetry of these parameters, and making \mathbf{Z} matrix to be symmetric. Consequently, the generic expressions of the trans-resistance parameters for two phase converters are reduced to two:

$$z_{ssl,xy} = \frac{1}{2 f_{sw}} \sum_{i=1}^{caps. phas.} \sum_{j=1} \frac{g_{i,x}^j g_{i,y}^j}{c_i}. \quad (4.61)$$

$$z_{fsl,xy} = \sum_{i=1}^{swts. phas.} \sum_{j=1} \frac{r_i}{D^j} ar_{i,x}^j ar_{i,y}^j, \quad (4.62)$$

4.2.3 Trans-resistance Parameters Methodology

Based on the *charge flow analysis* for current-loaded SCCs, each converter output has three associated sets of charge flow vectors per switching phase. Thus, for a given converter, the different vector types can be collected in a matrix, where each column corresponds to a converter output and each row corresponds to a circuit component.

⁴Converters with more than 2 phases are beyond the scope of the H-SCC, and so, this dissertation.

Therefore the *charge flow multipliers* are collected in a matrix as

$$\mathbf{A}^j = \begin{matrix} & \begin{matrix} out_1 & out_2 & & out_n \end{matrix} \\ \begin{matrix} v_{src} \\ c_1 \\ \\ c_p \end{matrix} & \begin{pmatrix} a_{1,1}^j & a_{1,2}^j & \cdots & a_{1,n}^j \\ a_{2,1}^j & a_{2,2}^j & \cdots & a_{2,n}^j \\ \vdots & \vdots & \ddots & \vdots \\ a_{p,1}^j & a_{p,2}^j & \cdots & a_{p,n}^j \end{pmatrix} \end{matrix}, \quad (4.63)$$

where the elements of the first row $a_{1,x}^j$ corresponds to the *charge flow multiplier* delivered by the input voltage source associated to the charge flow through the x -th output. The remaining elements after the first row are associated with the charge flow in the capacitors. Therefore $a_{1,1}$ is the net charge flow in capacitor c_1 due to the charge delivered at the 1st output node of a converter with p capacitors and n outputs.

Likewise, the *charge pumped multipliers* are collected in the following matrix

$$\mathbf{B}^j = \begin{matrix} & \begin{matrix} out_1 & out_2 & & out_n \end{matrix} \\ \begin{matrix} c_1 \\ c_2 \\ \\ c_p \end{matrix} & \begin{pmatrix} b_{1,1}^j & b_{1,2}^j & \cdots & b_{1,n}^j \\ b_{2,1}^j & b_{2,2}^j & \cdots & b_{2,n}^j \\ \vdots & \vdots & \ddots & \vdots \\ b_{p,1}^j & b_{p,2}^j & \cdots & b_{p,n}^j \end{pmatrix} \end{matrix}, \quad (4.64)$$

where all the elements are associated with the converter capacitors.

On the other hand, the *switch charge flow multipliers* lead to the following matrix

$$\mathbf{A}^j = \begin{matrix} & \begin{matrix} out_1 & out_2 & & out_n \end{matrix} \\ \begin{matrix} sw_1 \\ sw_2 \\ \\ sw_p \end{matrix} & \begin{pmatrix} ar_{1,1}^j & ar_{1,2}^j & \cdots & ar_{1,n}^j \\ ar_{2,1}^j & ar_{2,2}^j & \cdots & ar_{2,n}^j \\ \vdots & \vdots & \ddots & \vdots \\ ar_{p,1}^j & ar_{p,2}^j & \cdots & ar_{p,n}^j \end{pmatrix} \end{matrix}. \quad (4.65)$$

where all the elements are associated with the converter switches. This matrix can be extended with the Equivalent Series Resistance (ESR) of the capacitors, but for the sake of clarity they are not included in the present calculations yet.

The converter is described with two trans-resistance matrix: one for the SSL, \mathbf{Z}_{ssl} , and another for the FSL, \mathbf{Z}_{fsl} .

4.2.4 Slow Switching Limit Trans-resistance Matrix

The *redistributed* charge flow multipliers matrix can be obtained from the matrices \mathbf{A} and \mathbf{B} as

$$\mathbf{G}^j = \mathbf{A}_{(2:end,1:end)}^j - D^j \mathbf{B}^j, \quad (4.66)$$

The *redistributed charge* corresponds to the charge that flows between capacitors; therefore it is the root cause of losses associated with the SSL operation regime [11].

The SSL trans-resistance factors can be individually obtained from the redistributed charge multipliers as described in (4.61). In order to obtain directly the trans-resistance matrix, the operation in (4.61) is performed in two steps. First, the outer product of each row of \mathbf{G}^j is taken with itself as

$$\mathbf{K}_i^j = [\mathbf{G}_{(i,1:end)}^j]^T \mathbf{G}_{(i,1:end)}^j, \quad (4.67)$$

where the matrix \mathbf{K}_i contains all the possible products of the i^{th} row. Since each row in \mathbf{G} is associated with a capacitor, there is a matrix \mathbf{K}_i for each capacitor C_i . Second, with the set of \mathbf{K} matrices the trans-resistance matrix is obtained as

$$\mathbf{Z}_{ssl} = \frac{1}{2F_{sw}} \sum_{j=1}^{phas. caps.} \sum_{i=1} \frac{1}{C_i} \mathbf{K}_i^j. \quad (4.68)$$

4.2.5 Fast Switching Limit trans-resistance Matrix

For the FSL, the trans-resistance matrix is obtained using the switch charge multipliers contained in matrix \mathbf{Ar} . The operation to obtain the trans-resistance matrix as described in (4.61) is performed in two steps. First, a set of matrices are obtained by taking the outer product of each row of \mathbf{Ar} with itself as

$$\mathbf{Kr}_i^j = \mathbf{Ar}_{(i,1:end)}^j [\mathbf{Ar}_{(i,1:end)}^j]^T, \quad (4.69)$$

yielding a matrix for each row in \mathbf{Ar} associated with a switch *on-resistance* (r_i). Second, with the set of matrices \mathbf{Kr} the FSL trans-resistance matrix is obtained as

$$\mathbf{Z}_{fsl} = \sum_{i=1}^{swts. phas.} \sum_{j=1} \frac{i}{D^j} \mathbf{Kr}_i^j, \quad (4.70)$$

4.2.6 Converter trans-resistance Matrix

The total trans-resistance values are approximated using (4.38) as

$$\mathbf{Z}_{(x,y)} \approx \sqrt{\mathbf{Z}_{ssl,(x,y)}^2 + \mathbf{Z}_{fsl,(x,y)}^2}. \quad (4.71)$$

4.2.7 Conversion Ratio Vector

The conversion ratio vector is obtained as

$$\mathbf{m} = \sum_{j=1}^{phas.} [\mathbf{A}_{(1,1:end)}^j]^T. \quad (4.72)$$

4.3 Summary

This chapter presented a new methodology to analyse SCC that compared with the previous enables to:

- Compute the equivalent output resistance from any of the converter nodes.
- Compute the conversion ration form any of the converter nodes.
- Model converter with multiple outputs.
- Compute the coupling parameters between outputs for 2-phase converters.
- Include the effects of the output capacitor in r_{sc} .
- Include the effects of variations in duty cycle in the SSL region.
- Model both SCCs and H-SCCs.

In addition, a discussion about the different approximations of the r_{sc} using the two asymptotical limits (r_{ssl} and r_{fsl}) was provided. Concluding that the *arbitrary* of the original approximation was not less accurate than the new proposed formulations, as the circuit under study diverges from the reference circuit used in these new formulations. Giving the rational, to consider the original formulation as the most appropriated.

Bibliography

- [1] B. Arntzen and D. Maksimovic. Switched-capacitor dc/dc converters with resonant gate drive. *Power Electronics, IEEE Transactions on*, 13(5):892–902, Sep 1998. ISSN 0885-8993. doi: 10.1109/63.712304.
- [2] S. Ben-Yaakov. On the influence of switch resistances on switched-capacitor converter losses. *Industrial Electronics, IEEE Transactions on*, 59(1):638–640, Jan 2012. ISSN 0278-0046. doi: 10.1109/TIE.2011.2146219.
- [3] S. Ben-Yaakov and M. Evzelman. Generic and unified model of switched capacitor converters. In *Energy Conversion Congress and Exposition, 2009. ECCE 2009. IEEE*, pages 3501–3508, Sept 2009. doi: 10.1109/ECCE.2009.5316060.
- [4] M. Evzelman and S. Ben-Yaakov. Average-current-based conduction losses model of switched capacitor converters. *Power Electronics, IEEE Transactions on*, 28(7):3341–3352, July 2013. ISSN 0885-8993. doi: 10.1109/TPEL.2012.2226060.
- [5] P. Kumar and W. Proefrock. Novel switched capacitor based triple output fixed ratio converter(tofr). In *Applied Power Electronics Conference and Exposition (APEC), 2012 Twenty-Seventh Annual IEEE*, pages 2352–2356, 2012.
- [6] M.S. Makowski. A note on resistive models of switched-capacitor dc-dc converters: Unified incremental-graph-based formulas given. In *Signals and Electronic Systems (ICSES), 2012 International Conference on*, pages 1–4, Sept 2012. doi: 10.1109/ICSES.2012.6382221.
- [7] M.S. Makowski and D. Maksimovic. Performance limits of switched-capacitor dc-dc converters. In *Power Electronics Specialists Conference, 1995. PESC '95 Record., 26th Annual IEEE*, volume 2, pages 1215 –1221 vol.2, jun 1995. doi: 10.1109/PESC.1995.474969.
- [8] D. Maksimovic and S. Dhar. Switched-capacitor dc-dc converters for low-power on-chip applications. In *Power Electronics Specialists Conference, 1999. PESC 99. 30th Annual IEEE*, volume 1, pages 54–59 vol.1, Aug 1999. doi: 10.1109/PESC.1999.788980.
- [9] I. Oota, N. Hara, and F. Ueno. A general method for deriving output resistances of serial fixed type switched-capacitor power supplies. In *Circuits and Systems, 2000. Proceedings. ISCAS 2000 Geneva. The 2000 IEEE International Symposium on*, volume 3, pages 503–506 vol.3, 2000. doi: 10.1109/ISCAS.2000.856107.
- [10] P.K. Peter and V. Agarwal. On the input resistance of a reconfigurable switched capacitor dc-dc converter-based maximum power point tracker of a photovoltaic source. *Power Electronics, IEEE Transactions on*, 27(12):4880–4893, Dec 2012. ISSN 0885-8993. doi: 10.1109/TPEL.2012.2192452.

- [11] Michael Douglas Seeman. *A Design Methodology for Switched-Capacitor DC-DC Converters*. PhD thesis, EECS Department, University of California, Berkeley, May 2009. URL <http://www.eecs.berkeley.edu/Pubs/TechRpts/2009/EECS-2009-78.html>.
- [12] Tom Van Breussegeem and Michiel Steyaert. *CMOS Integrated Capacitive DC-DC Converters*, chapter 1.4, pages 84–85. Springer, 2013.

Chapter 5

Model validation

The model was validated comparing the predicted r_{sc} with either behavioural circuit simulations and an experimental circuit. Because the proposed method has the goal to model losses produced by the charge transfer between capacitors and conductance through resistive elements (switches and parasitics), simulations with a behavioral simulator only take into account these two sources of losses, enabling a fair comparison to validate the proposed model. Nevertheless, an experimental converter was specifically build with the only propose to measure and validate the model parameters. The converter was designed to mitigate any other source of loss not included in the model, such as switching losses, driving losses, etc. These other loss mechanisms can be added to the model as described in [3]; however including them is out of the scope of the model presented in the previous chapter.

This chapter is divided in two sections. The first section validates the model for single output SCC using only transient circuit simulations. Results are presented for both output types: The current use, loading the converter at a *dc*-output. and the *hybrid* use, loading the converter at a *pwm*-output. The second section validates the multiple output model using both circuit simulations and an experimental setup.

5.1 Single output validation

The accuracy of the model is presented for both output types of the converter: *dc* and *pwm*. In both cases, the validation is performed comparing the predicted r_{sc} values of the model with the measured values from a the behavioural circuit simulator PLECS. In the case of the *dc*-node the results are also compared with the original charge flow analysis, which is the current used methodology.

The same 3:1 Dickson was used as a test circuit. First connecting the load to the *dc*-node as shown in Figure 5.7, and second connecting the load to the *pwm*-node as shown in Figure 5.2. In both cases the load was emulated with a constant current source. In both simulations the design parameters were kept the same as defined in Table 5.1.

Table 5.1: 3:1 Dickson design parameters used in PLECS.

Parameter	Value
v_{in}	10V
r_{on}	100m Ω
c_x	100nF
η^1	95%

In order to keep the converter properly operating, the load current i_{out} was adjusted in each simulation by fixing the efficiency to $\eta = 95\%$. Hence the load current is given by

$$i_{out} = m_x v_{src} \frac{1 - \eta}{r_{scc,mdl}}, \quad (5.1)$$

where m_x is the conversion ratio for the given output and $r_{scc,mdl}$ is the predicted output resistance by the model. Fixing the efficiency, guarantees the same average output voltage across all the simulations, since rearranging (3.6) gives

$$v_{out} = m_x v_{src} \eta. \quad (5.2)$$

Thus fixing a high efficiency value guarantees that the voltage at the load is close to the target voltage ($v_{trg} = m_x v_{src}$). The load current is small enough to prevent the converter's capacitors from discharging thus avoiding to bring the converter in an undesired operating regime.

5.1.1 Measuring r_{scc} from a SCC

Figure 5.1 shows the configuration used to measure r_{scc} in the circuit simulator. The r_{scc} is computed measuring the converter in two states, while keeping constant the driving signals of the converter (f_{sw} and D):

1. Under no load condition (s_1 open). The target voltage v_{trg} and the conversion ration m are determined,

$$v_{trg} = v_{out}, \quad (5.3)$$

$$m = \frac{v_{out}}{v_{in}}. \quad (5.4)$$

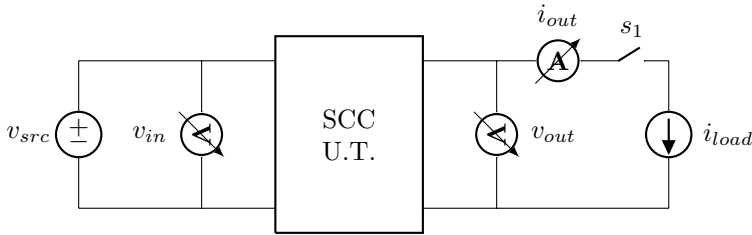


Figure 5.1: Experimental arrangement used to measure r_{scc} from a SCC.

2. Loading the converter (s_1 closed), r_{sc} is computed using (5.3) as

$$r_{scc} = \frac{v_{trg} - v_{out}}{i_{out}}. \quad (5.5)$$

5.1.2 Fixed dc -output

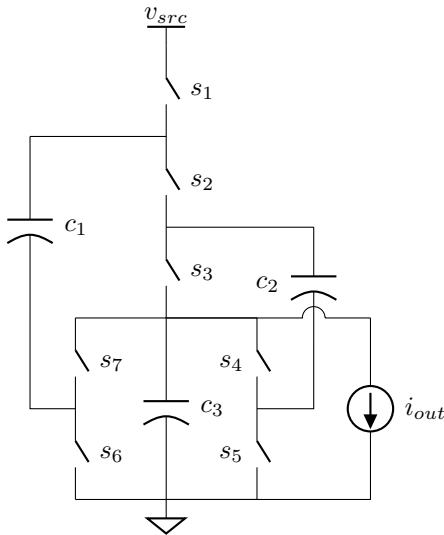


Figure 5.2: 3:1 Dickson circuit used to validate the model accuracy in the prediction of r_{scc} for the dc -node. Odd numbered switches belong to phase 1, even numbered switches belong to phase 2, and D corresponds to the duty cycle of phase 1.

Figure 5.3 shows r_{sc} for a sweep in duty cycle (D) between 10% and 9%, simulated at four different frequencies: 100kHz, 1MHz, 10MHz and 100MHz; thus operating the converter from the SSL to the FSL regions, and in between them. The \square *markers* are the measured resistance values from the PLECS simulation, the *solid black lines with markers* are the results of the model using the different approximations Original (\circ), Markowski ($+$) and modified Markowski (\times). These different approximations were previously described in Section 4.1.8. The *grey markers* are

the relative error values (ϵ_r) between the model results and the PLECS simulation. The two *gray lines* belong to the results of the previous modeling methods. The *gray dashed line* corresponds to the results of the original charge flow (OCF) method [2] proposed by Makowski and Maksimovic in 1995. The dotted line is a posterior addition to the method that includes the effects of the output capacitor, proposed by Van Breussegem and Steyaert in [4].

Looking to the relative error of the model with respect to the PLECS simulation, it can be seen that on the one hand the two extreme simulations Figures 5.3a and 5.3d achieve the highest accuracy with a relative error ϵ_r lower than 1% at $100kHz$ and 4% at $100MHz$. In this two simulations the converter operates in the well-defined switching limits, SSL and FSL, therefore the losses are precisely described by the model. On the other hand, the other two simulations, $1MHz$ and $10MHz$, have an error within 5% to 20%. The accuracy is reduced since the converter operates between of two switching limits, hence r_{scc} is approximated from the two asymptotical functions. Looking to the different approximation methods (*gray markers*), we can see that the original approximation for r_{scc} presents the best accuracy in all the simulations. Independently of the model accuracy, it can be seen that predictive trends (in all fourth plots of Figure 5.3) are still consistent for variations in duty cycle.

The plotted results of the current methods (*gray lines*) make evident their limitations in the prediction of r_{scc} . Actually, these limitations come from modeling the load as a voltage sink, as described in Section ??, which neglects the effects of the duty cycle (D) and the output capacitor (c_o) in the prediction of r_{ssl} . Figures 5.3a and 5.3b show the converter operating in the SSL region. The original charge flow method *OCF* (*gray dashed line*) only matches the measured value in PLECS when the duty cycle is close to 20% and overestimates its value for the majority of the range. Steyaert proposed a modification of the charge flow method that takes into account the output capacitor in the prediction of r_{scc} , however the predicted r_{scc} (*gray dotted line*) does not show a better trend than the original method. In this case, r_{scc} presents a lower value, only matching the measured value for $D = 65\%$. Indeed, both plots make evident that predicted r_{scc} is independent to the duty cycle, which is not the case for the new proposed methodology (*solid curves*). When the converter operates in the FSL region, there are no differences between the methods as it can be seen in Figure 5.3b.

The other limitation of the original method is that it leads to inaccuracies when the output capacitor c_o becomes comparable in value to the rest of the capacitors in the converter. The plots in Figure 5.4 present r_{scc} for a sweep in frequency. In the figure, each row is associated to a duty cycle, hence in the top row $D = 23.3\%$, middle $D = 50\%$ and bottom $D = 76.7\%$. Each column is associated to a different size of the output capacitor c_o , hence left column $c_o = c_{fly}$, middle $c_o = 10c_{fly}$, and right $c_o = 100c_{fly}$, being $c_{fly} = c_1 = c_2 = 100nF$. The square markers present the measured values of r_{scc} using PLECS, the *solid black lines* present the three modeling methods, and the *grey markers* are ϵ_r with respect to the PLECS results.

Reading the plots from left to right, it can be seen that for the two old methods (+ and \times markers) the relative error reduces as c_o increases, achieving a almost the same accuracy of the new proposed method for largest value of c_o . Looking in detail, we observe that the highest inaccuracies are in the SSL region, in the low frequency range. At the same time, between the two old methodologies, the original methodology has a higher accuracy for $D = 23.3\%$, and in the other cases Steyaert's modification achieves an smaller error. Actually, in the original charge flow method it was assumed $D = 50\%$ when operating in the SSL region, therefore Steyaert's modification would be, under this assumption, better. In any case, the results show clearly that the best accuracy is achieved with the new proposed methodology, keeping the relative error within the same limits for all different scenarios. We can observe in all plots the lowest accuracy is around the elbow of the r_{scc} curve, since the values are approximated from the two asymptotical limits.

The influence of c_o in r_{scc} can be better visualized in the plot of Figure 5.9. The results are given for the converter operating with $D = 50\%$, the \square markers are the measured values of r_{scc} , and the solid lines the different modeling methodologies. We can see that as the output capacitor reduces, r_{scc} reduces as well till a certain minimum point where it starts increasing again. From the three modeling methodologies, only the proposed in this work follows the measured data. Actually the reason for the decrease of the output resistance value is because a smaller output capacitor allows the other capacitors to contribute in delivering charge to the load. However reducing the output capacitor increases the voltage ripple at the output node. In [1] are exploited the advantages of reducing the output capacitor in order to increase the power density in a full integrated SCC.

5.1.3 Floating *pwm*-output

Figures 5.8 and 5.9 present the results of r_{scc} for a sweep of the duty cycle (D) and frequency (f_{sw}) respectively. In both figures, the results are presented using the different approximations described in Section 4.1.8.

Figure 5.8 presents a sweep in duty cycle for different frequencies, respectively: $100kHz$, $1MHz$, $10MHz$ and $100MHz$. Like in the results for the *dc*-node, the two extreme cases, top and bottom, present the highest accuracy with ϵ_r below the 2%, since the converter operate in the deep regions of the two well-defined operation limits: SSL (Figure 5.8a) and FSL (Figure 5.8d). Outside the deep operation limits (Figures 5.8b and 5.8c), the accuracy is decreased, being up to an order of magnitude higher, since the values are approximated from the two asymptotic limits. Regarding to the different approximation methods, again the original formulation ($r_{scc} = \sqrt{r_{ssl}^2 + r_{fsl}^2}$) achieves the best results.

Figure 5.9 presents r_{scc} for a sweep of the switching frequency f_{sw} , showing the well-known characteristic curve of r_{scc} . Results are presented for different duty cycles.

Consistent with the previous results, the accuracy is always reduced in the elbow of the curve where the converter operates in between the two limiting regions. At the same time, extreme duty cycles show smaller relative error (ϵ_r). However this smaller values in ϵ_r are also influenced by the higher values of r_{scc} at these regions. Looking to the different approximations of r_{scc} , as in the previous case, the original formulation still obtains the best accuracy. Independently of the model accuracy, it can be seen that predictive trends, in all presented results, are still consistent for variations in duty cycle and frequency.

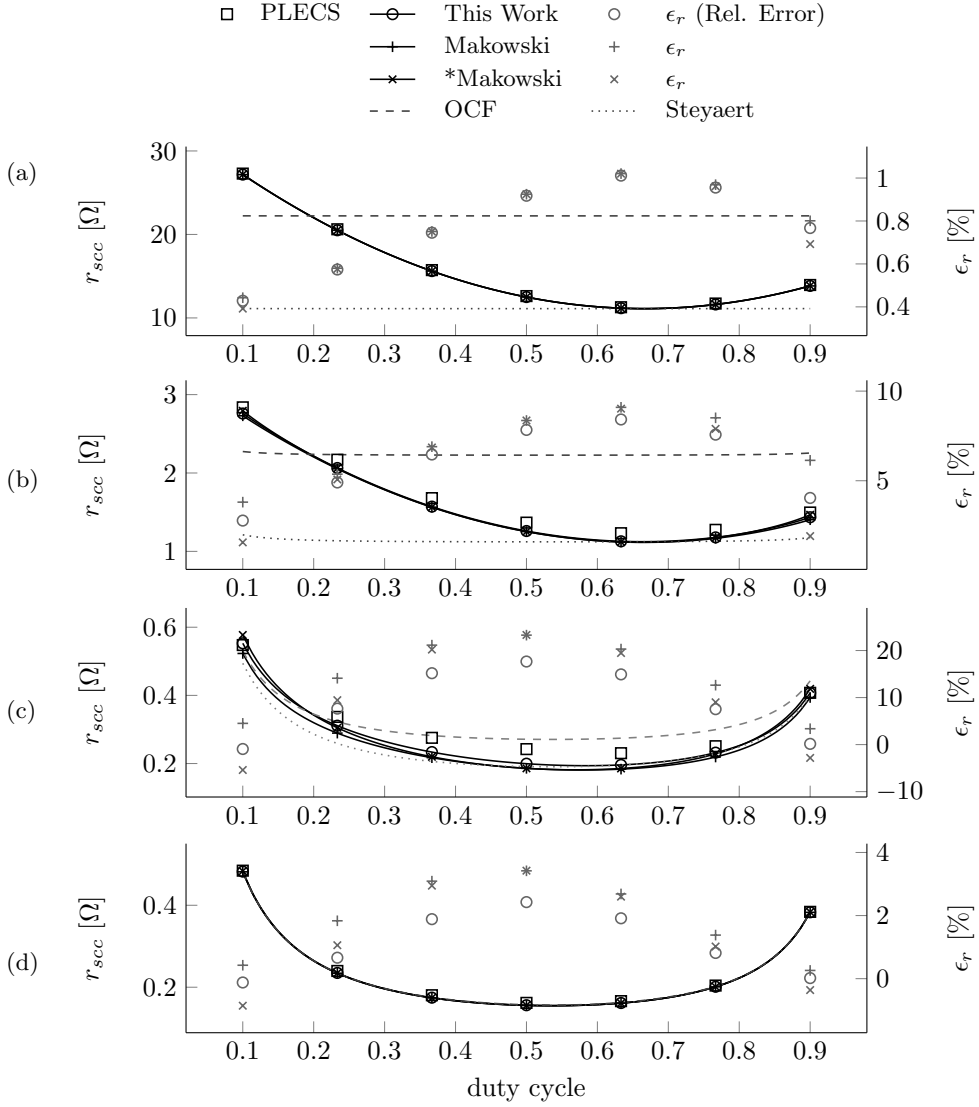


Figure 5.3: r_{scc} from the dc -node of the converter of Figure 5.2. \square markers are the experimental results compared with the *solid black lines* predicted by the model at different f_{sw} *top-to-bottom*: 100kHz, 1MHz, 10MHz and 100MHz. The model results are given for the different approximations: Original (\circ), Makowski ($+$), Makowski modified (\times); and the *gray markers* are the relative error for the different approximations. The *dashed gray line* corresponds to the original charge flow analysis, and the *dotted gray line* to a posterior enhancement including the effects of the output capacitor.

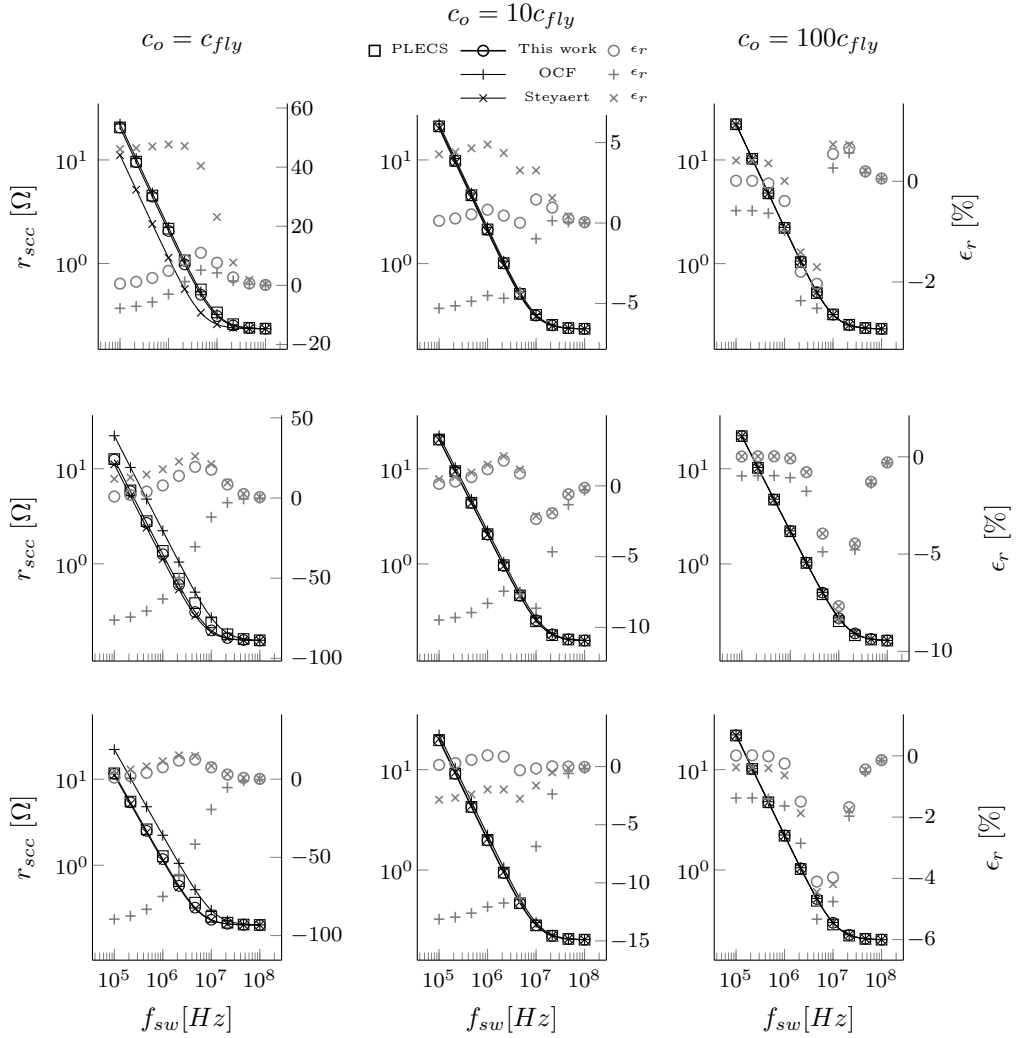


Figure 5.4: r_{scc} from the dc -node of the converter of Figure 5.2 for a sweep of f_{sw} . \square markers are the experimental points. The solid black lines are the different modeling methods, and the gray markers the relative error of each method. Plots are presented for different duty cycles: Rows top-to-bottom- $D = 23.3\%$, $D = 50\%$ and $D = 76.7\%$. And also for different c_o values: columns left-to-right- c_{fly} , $10 c_{fly}$ and $100 c_{fly}$.

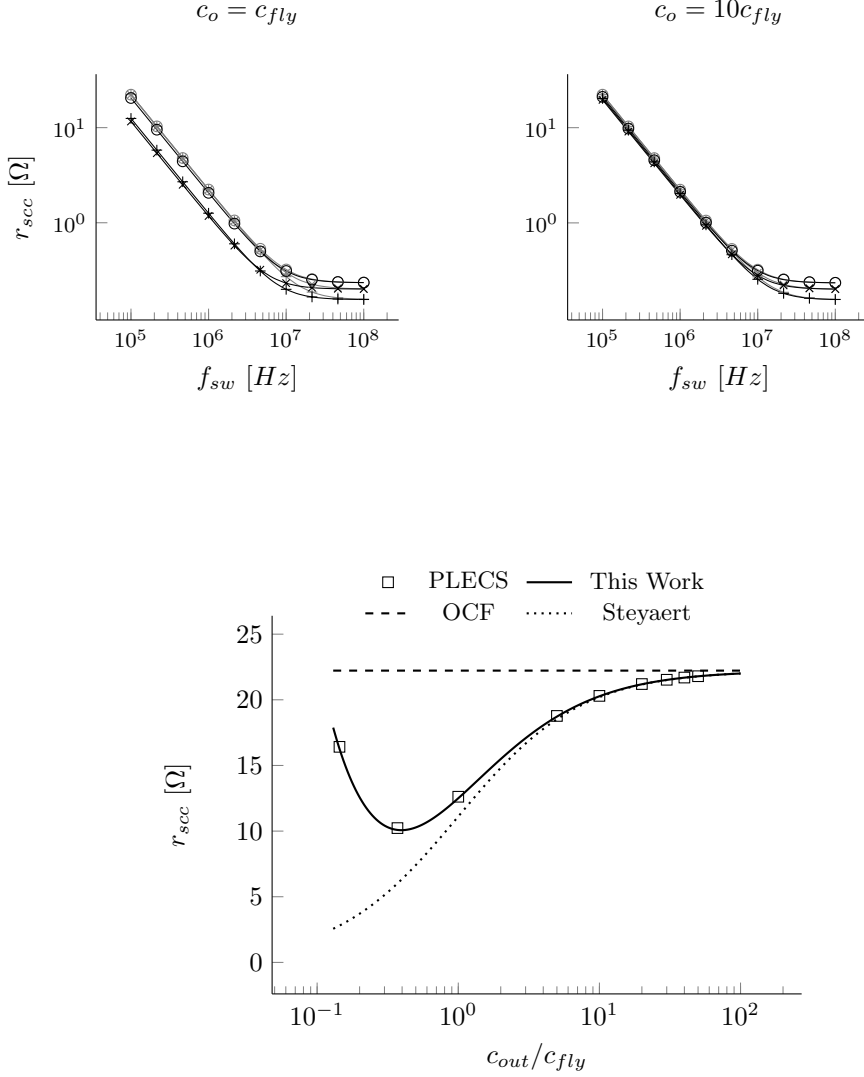
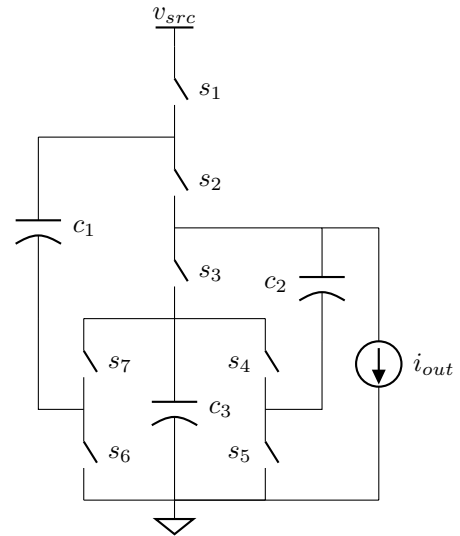


Figure 5.6: Equivalent Output Resistance (r_{scc}) as function of the relative size of the output capacitor (dc -capacitor) with respect to the flying capacitors for the 3:1 Dickson converter of Figure 5.2. Results presented for the converter operating at $f_{sw} = 100kHz$ with capacitors $c_1 = c_2 = c_{fly} = 100nF$ and all switch resistances $r_{on} = 100m\Omega$.

Figure 5.7: 3:1 H²-Dickson circuit used to validate the model accuracy in the prediction of r_{scs} for the *pwm*-node. Odd numbered switches belong to phase 1, even numbered switches belong to phase 2, and D corresponds to the duty cycle of phase 1.



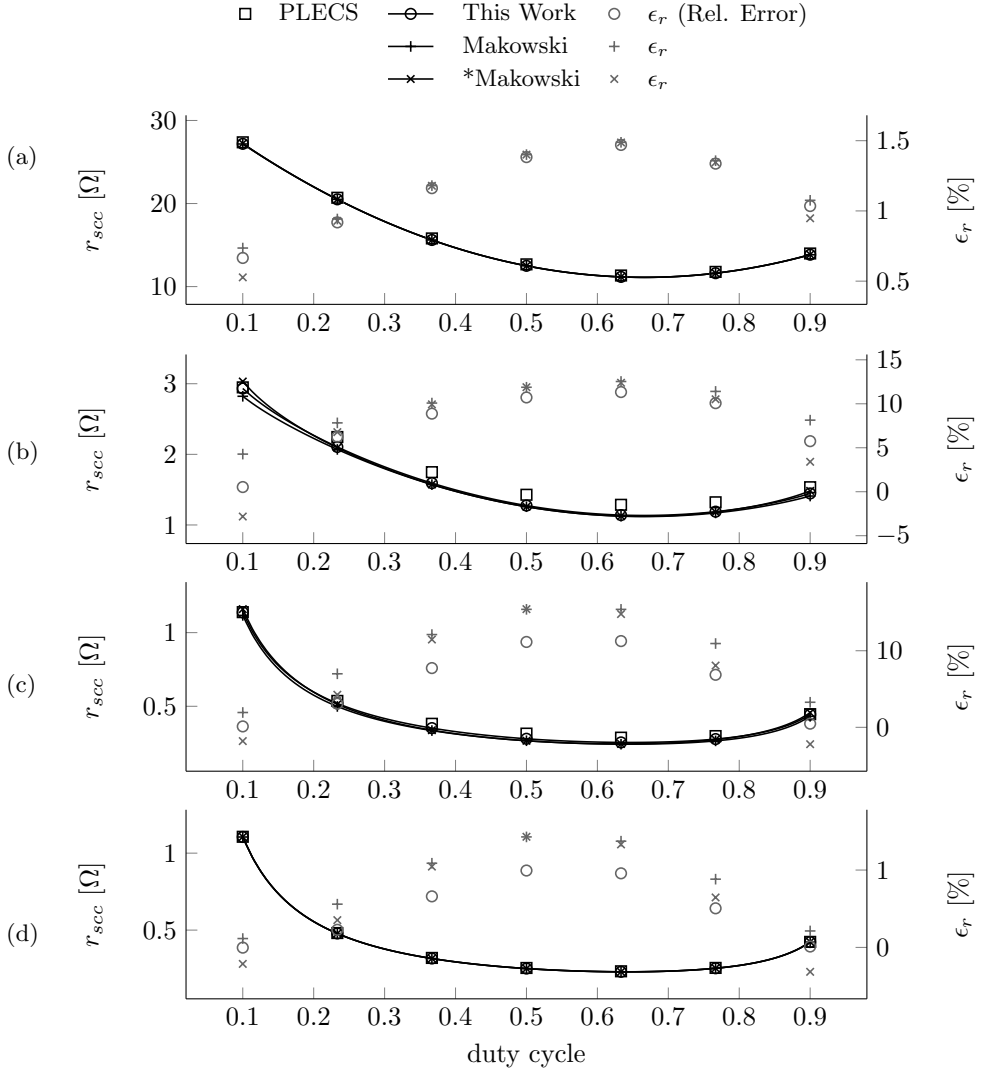


Figure 5.8: r_{scc} from the *pwm*-node of the converter of Figure 5.2. \square markers are the experimental results compared with the *solid black lines* predicted by the model at different f_{sw} *top-to-bottom*: 100kHz , 1MHz , 10MHz and 100MHz . The model results are given for the different approximations: Original (\circ), Makowski ($+$), Makowski modified (\times); and the *gray markers* are the relative error for the different approximations.

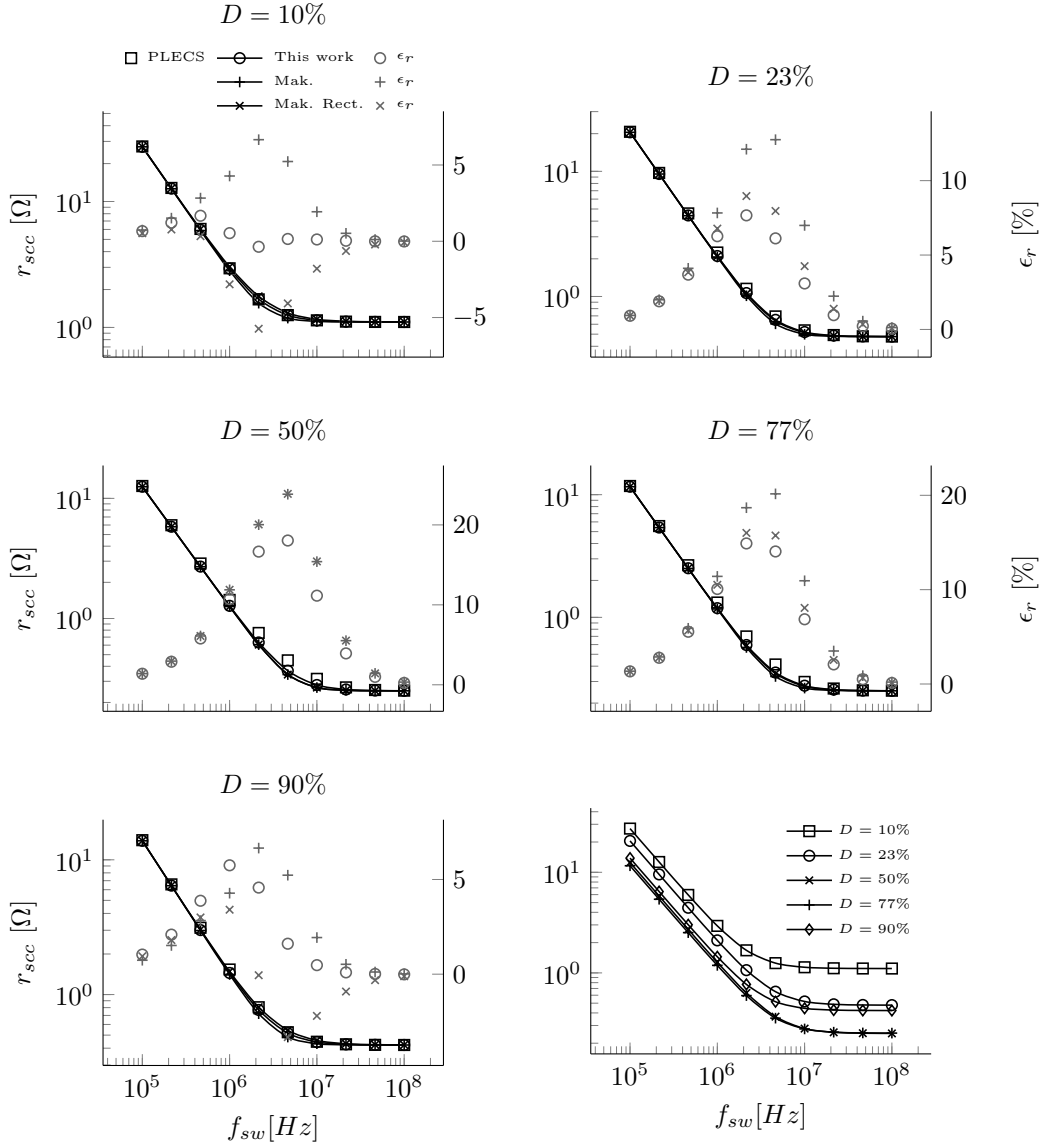


Figure 5.9: r_{scc} from the *pwm*-node of the converter of Figure 5.7. *Plots 1-5 top-to-bottom*- Frequency sweep for different duty cycles: 10%, 23%, 50%, 63% and 90%. \square markers are the PLECS results and the *solid lines* the model results using the different approximations: *o*) Original, *+*) Makowski, *x*) Makowski modified. *Bottom-right plot* - Parametric plot of the predicted r_{scc} using the original approximation all the simulated duty cycles.

5.2 Multiple output validation

The 2:1 SCC of Figure 5.10 was used to validate the multiple output SCC model. The predicted values of the trans-conductance matrix \mathbf{Z} were compared with measured values in PLECS simulations and in an experimental board.

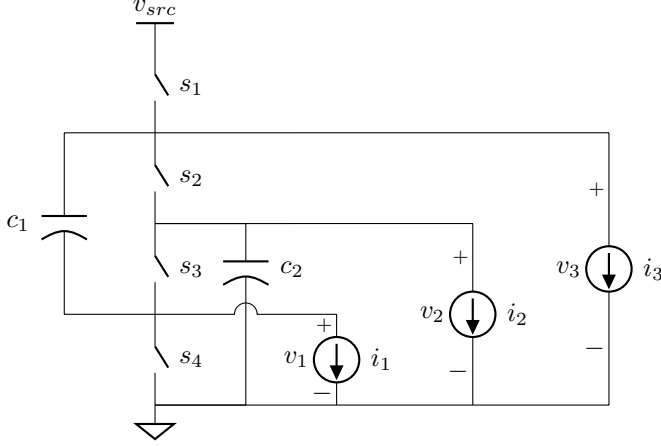


Figure 5.10: Circuit used for the experimental setup, 2:1 SCC, presenting all the available outputs. In the experimental setup the outputs were loaded with constant current sinks.

5.2.1 Measuring \mathbf{Z}_{scc} matrix from a SCC

Figure 5.11 shows the configuration used to measure the \mathbf{Z}_{scc} matrix, both in the circuit simulator and in the experimental setup. In the case of the experimental setup, the currents were measured using three different Keithley[®] SourceMeter 2440 one for each channel. The voltages were measured with four different Keithley[®] Meters 2000, one for the input voltage and three for the output channels. The \mathbf{Z}_{scc} is computed measuring the converter in two states, while keeping constant the driving signals f_{sw} and D of the converter:

1. Operating with no load (s_1, s_2, s_3 open). The Target voltage v_{trg} and the conversion ration m are determined,

$$v_{trg,x} = v_x, \quad (5.6)$$

$$m_x = \frac{v_{out,x}}{v_{in}}. \quad (5.7)$$

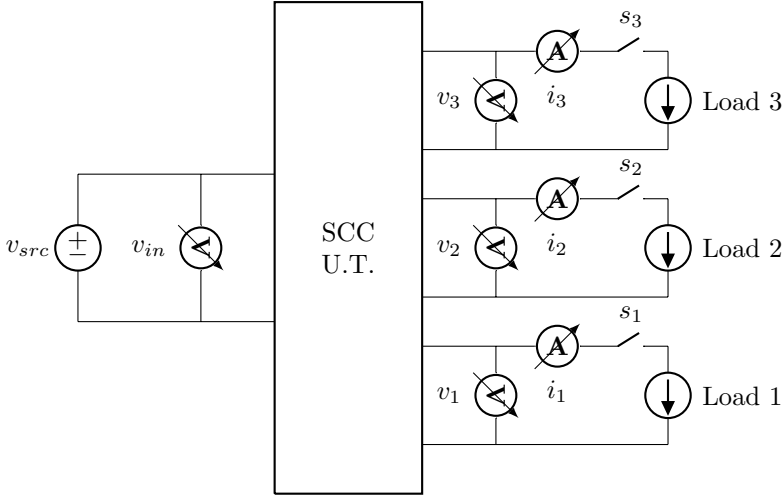


Figure 5.11: Experimental arrangement used to test and measure the \mathbf{Z}_{scc} matrix.

The measured target voltages are grouped in a column vector as

$$\mathbf{v}_{trg} = \begin{pmatrix} v_{trg,1} \\ v_{trg,2} \\ v_{trg,3} \end{pmatrix} \quad (5.8)$$

2. Loaded measurements. A single output is loaded, by closing one of the s_x switches. The output voltages and the load current are measured. The measured voltages are grouped in the \mathbf{V}_{out} matrix, where the first column corresponds of the measured voltages when *Load 1* is connected, the second column when *Load 2* is connected, etc. The measured output currents are stored in the vector \mathbf{i}_{out} . The operation is performed for the three outputs. Subsequently the \mathbf{Z}_{scc} is obtained as

$$\mathbf{Z}_{scc} = \frac{\mathbf{v}_{trg} \tilde{\mathbf{1}} - \mathbf{V}_{out}}{\mathbf{I} \mathbf{i}_{out}}, \quad (5.9)$$

where $\tilde{\mathbf{1}}$ is a three ones row vector, and \mathbf{I} is the identity matrix.

5.2.2 Simulation results

The experimental circuit has been simulated for the two operation modes SSL and FSL. Results are shown in Figures 5.12 and 5.13 respectively. Each operation mode has been simulated with different parameters corresponding to the ones in the Table 5.2. In each simulation the duty cycle of the driving signal has been swept from 10% to 90%.

Table 5.2: Simulation profiles associated with the different operation modes.

Mode	f_{sw}	C	R_{on}
SSL	100 kHz	1 μ F	1 m Ω
FSL	10 MHz	1 μ F	500 m Ω

In both cases the predicted values compare favorably with the simulation results. The predicted values follow the trend of the simulation results with the variations of the duty cycle, where the error is always less than 4%.

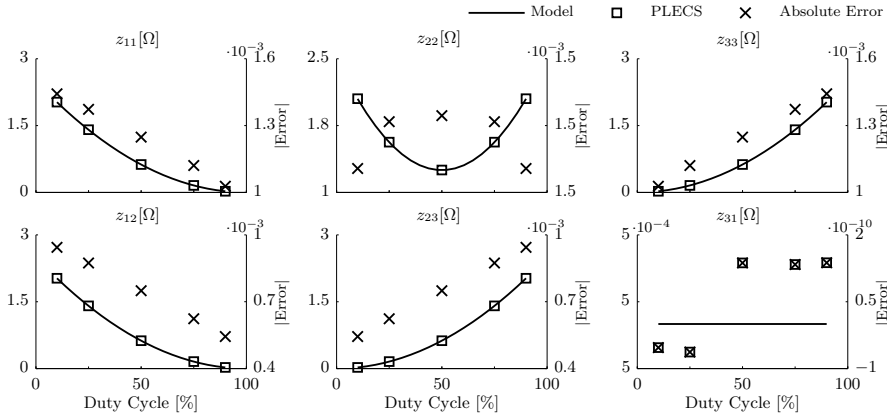


Figure 5.12: SSL comparison between PLECS simulation and the proposed model.

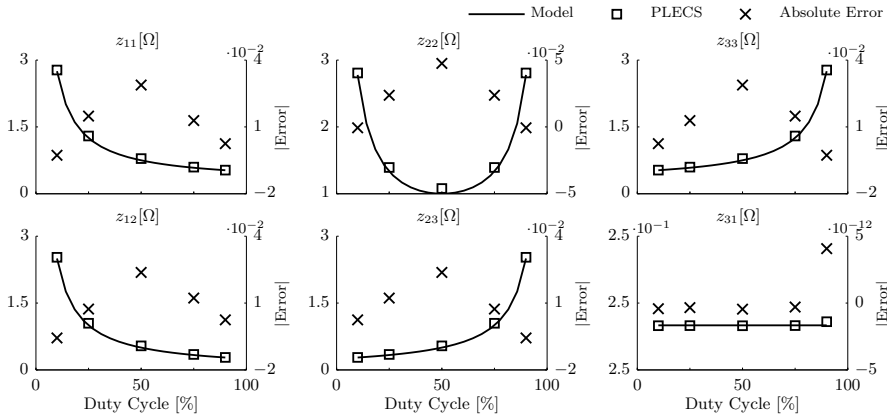


Figure 5.13: FSL comparison between PLECS simulation and the proposed model.

5.2.3 Experimental results

An experimental set-up of the converter in was built. The converter uses four MOS-FETs TN0104 from Supertex with typical *on*-resistance of 1.5Ω . Two tantalum electrolytic capacitors of $10\mu\text{F}$ have been used as flying capacitors. The circuit was operated at 5kHz and the trans-resistance parameters are measured at different duty cycles. The results are compared with the model and presented in Figures ?? and 5.15, it can be seen that the predictions match the measured values with less than 10% error. All the trans-impedance values with the exception of parameters z_{31} and z_{13} follow the trend with the duty cycle predicted by the model. z_{31} and z_{13} have a bigger error since these values are much smaller than the rest of the converter parameters and, therefore, more sensitive to the parasitics of the board. In any case, it can be seen that predictive trends, in all presented results, are still consistent for variations in duty cycle and frequency for the model trans-resistance parameters.

5.3 Summary

The presented model is a valuable tool for modeling a broad range of SCCs, from the classical approach of a single output converter to the new architectures where SCCs are combined with inductors. Unlike the previous models, this method allows to model the behaviour of multiple current loaded outputs, including their coupling relations. The model has been verified with simulations and experiments, and for both cases compares favorably. Since the resulting model is based on analytical expressions; the computation time is dramatically faster than any time-domain based simulator.

At the same time, it has been demonstrated that the original charge flow method was inaccurate in the SSL region, specially when the output capacitor was comparable in size to the flying capacitors. And it was not sensible to the variations of the duty cycle, leading to the wrong estimation of the output resistance of the converter.

The results presented the best accuracy of the model when the converter operates close to the well-defined switching limits, SSL and FSL, with relative errors below 5%. When the converter operates in region between the two limits, the relative error can increase up to 20%, since the value is approximated from the two asymptotical limits. With regard to the different proposed approximations, results shown the best accuracy using the first proposed approximation of $r_{sc} = \sqrt{r_{ssl}^2 + r_{fsl}^2}$.

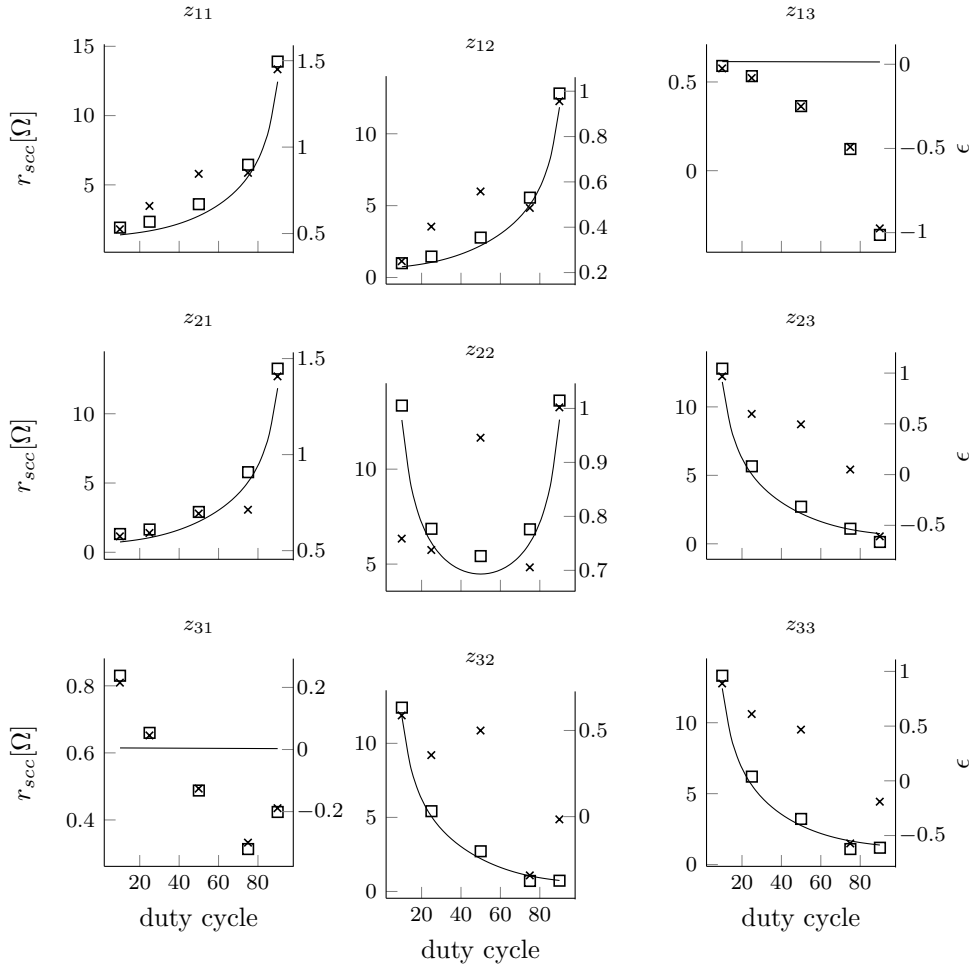


Figure 5.14: Experimental results of the 2:1 SCC, with $f_{sw} = 5kHz$. Comparison of the measured (\square markers) trans-resistance parameters with the model predicted (solid line), and the error (ϵ) between the model and the measures (x markers.)

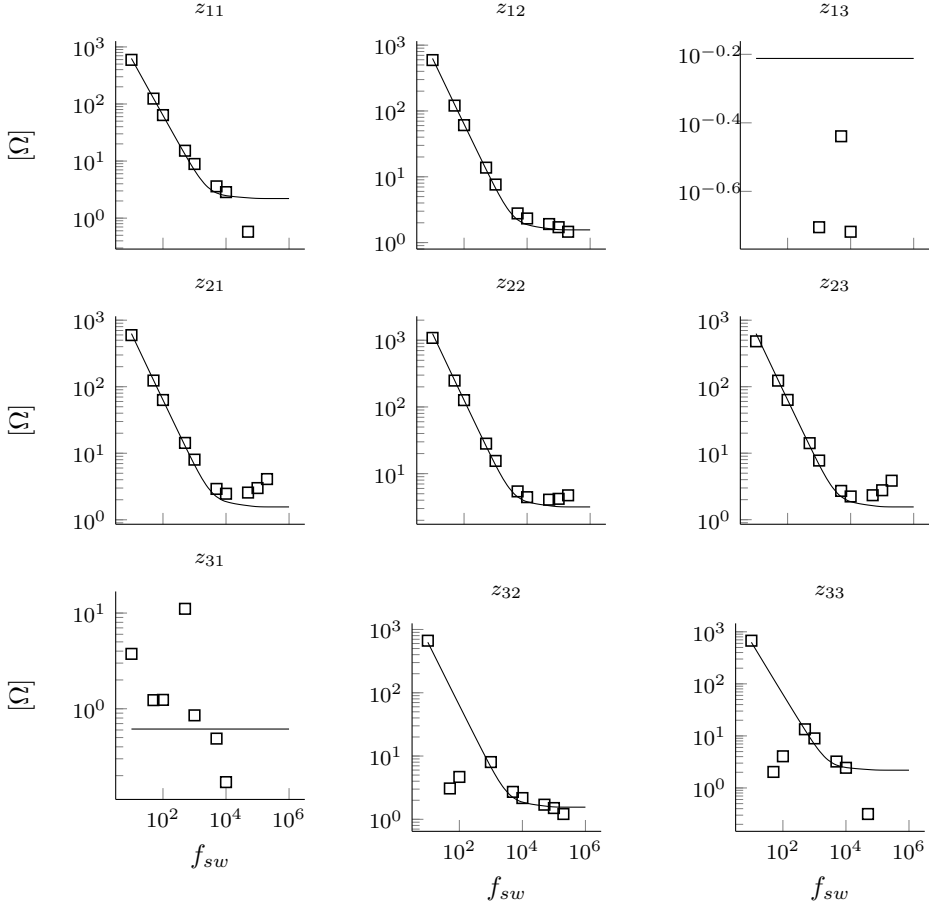


Figure 5.15: Experimental results of the 2:1 SCC for sweep in f_{sw} with $D = 50\%$. Comparison of the measured (\square markers) trans-resistance parameters with the model predicted (solid line).

Bibliography

- [1] T.M. Andersen, F. Krismer, J.W. Kolar, T. Toiff, C. Menolfi, L. Kull, T. Morf, M. Kossel, M. Brandli, P. Buchmann, and P.A. Francese. 4.7 a sub-ns response on-chip switched-capacitor dc-dc voltage regulator delivering 3.7w/mm² at 90in 32nm soi cmos. In *Solid-State Circuits Conference Digest of Technical Papers (ISSCC), 2014 IEEE International*, pages 90–91, Feb 2014. doi: 10.1109/ISSCC.2014.6757351.
- [2] M.S. Makowski and D. Maksimovic. Performance limits of switched-capacitor dc-dc converters. In *Power Electronics Specialists Conference, 1995. PESC '95 Record., 26th Annual IEEE*, volume 2, pages 1215 –1221 vol.2, jun 1995. doi: 10.1109/PESC.1995.474969.
- [3] Michael Douglas Seeman. *A Design Methodology for Switched-Capacitor DC-DC Converters*. PhD thesis, EECS Department, University of California, Berkeley, May 2009. URL <http://www.eecs.berkeley.edu/Pubs/TechRpts/2009/EECS-2009-78.html>.
- [4] Tom Van Breussegeem and Michiel Steyaert. *CMOS Integrated Capacitive DC-DC Converters*, chapter 1.4, pages 84–85. Springer, 2013.

Chapter 6

H-SCC LED driver

Chapter 7

Conclusions

Appendices

Appendix A

Modeling of Switched Capacitors Converters

A.1 3:1 Dickson converter vectors