


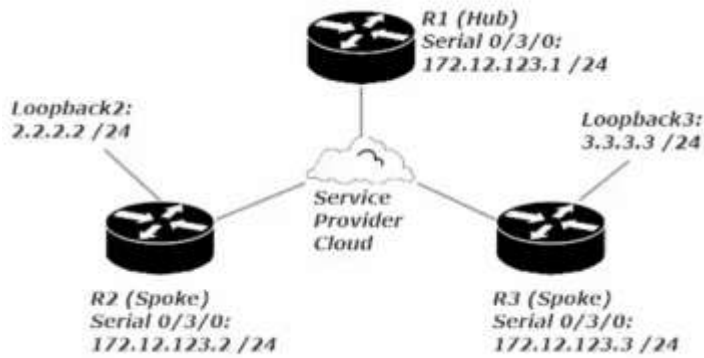

Loopback interfaces are virtual/logical interfaces

Don't use the 127.0.0.0/8 network on a Cisco Router. This is reserved for Host Loopbacks

Rip 1 and RIP 2

AD (administrative distance is 120 for RIP 110 for OSPF)

For example

R1#show ip route

2.2.2.0/24

2.2.2.2/32 (120/1) The 120 represents the AD for a RIP route and 1 represents the hop count.

RIP's use of hop counts make it a poor protocol for routing as it only shows how many connected routers it must go through before reaching the router with said subnetter Locally connected. RIPv1+2 don't take the speed of a network link into account, just how many "hops" away the route is

Routing Technique	Preference
Connected Interface	0
Static Route	1
EIGRP Summary Route	5
EBGP	20
Internal EIGRP	90
IGRP	100
OSPF	110
ISIS	115
RIP	120
EGP	140
ODR	160
External EIGRP	170
Internal BGP	200
Unknown	255