


GLITCHWAVE 567 — Hammond 1590XX TOP FACE (print 1:1, verify 100mm scale bar!)

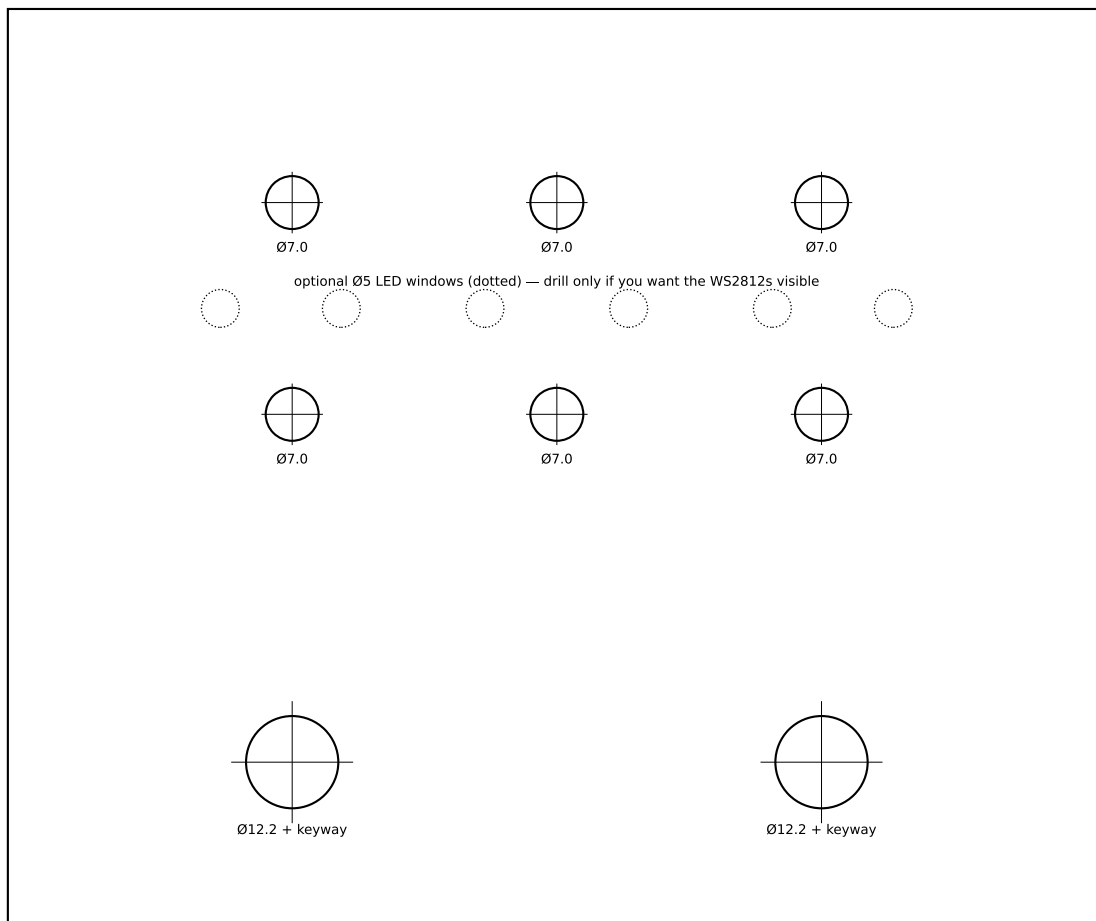


---

100.0 mm scale check

Pot holes: plain Ø7 (RK09K snap-in shafts, no nuts — board held by stomp bushings + standoffs)


Stomp holes: Ø12.2 for M12x1.0 bushing; file keyway flat per switch anti-rotation tab

BACK WALL (jacks) — outside view, 1:1 width

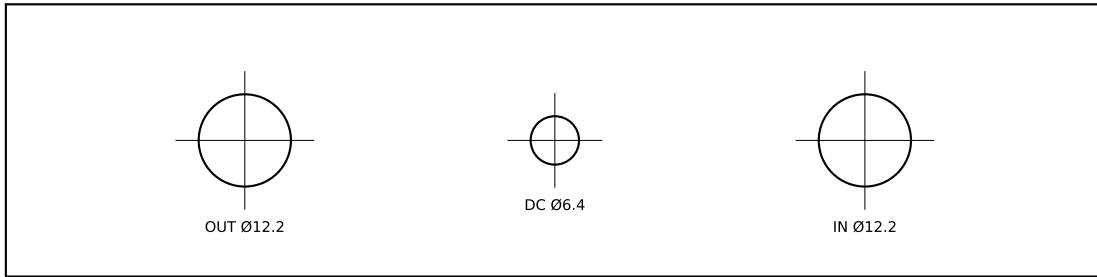


Vertical: axes 5.0 / 3.65 / 5.0 mm above MAIN board top — mark after dry-fit

LEFT WALL — outside view (flip horizontally when taping!), 1:1

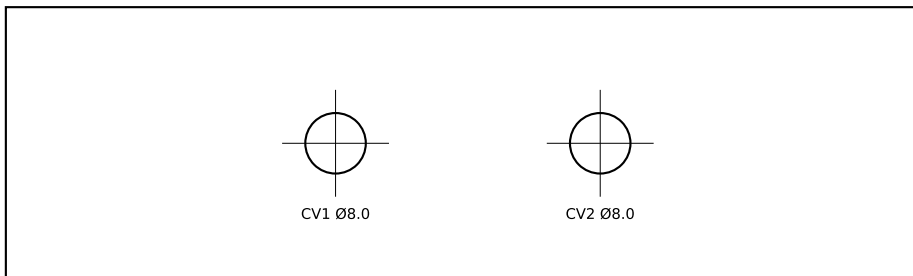

Axes 4.5 mm above MAIN board top

RIGHT WALL — outside view, 1:1

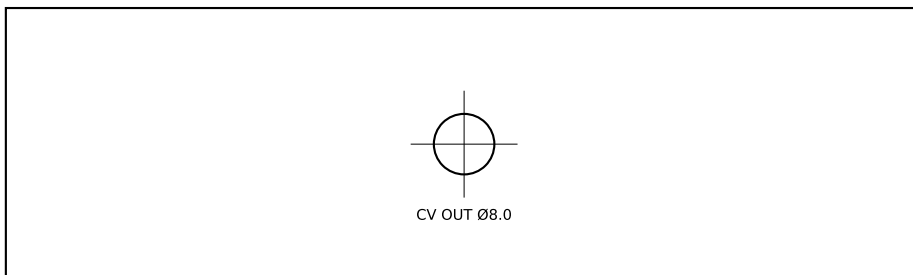

Axis 4.5 mm above MAIN board top

Wall hole heights: measure from the MAIN board top surface after dry-fitting the board stack on its standoffs, then transfer to the wall. X positions are 1:1 above. Print at 100% scale (no "fit to page"). Verify the scale bar on page 1.