


+ Mu-Tron ballistics (atk ~4ms, rel ~150ms) -> buffered, clamped -> Pico ADC.
 The is FIRMWARE (matches plugin mod system); only the FEEL is analog.



VERIFY at review: rectifier is VREF-referenced; divider maps env swing into 0–3.3V; BAT54 hard clamp.

pts up to ~10V), BAT54S rail clamps, RC slew $\rightarrow$ AD7104DCP direct PWM (fast) 2-pole RC $\rightarrow$ x1.52 (0-3.3 $\rightarrow$ 0-5V) on the +5V-capable VA op-amp $\rightarrow$ 1k $\rightarrow$ jack.

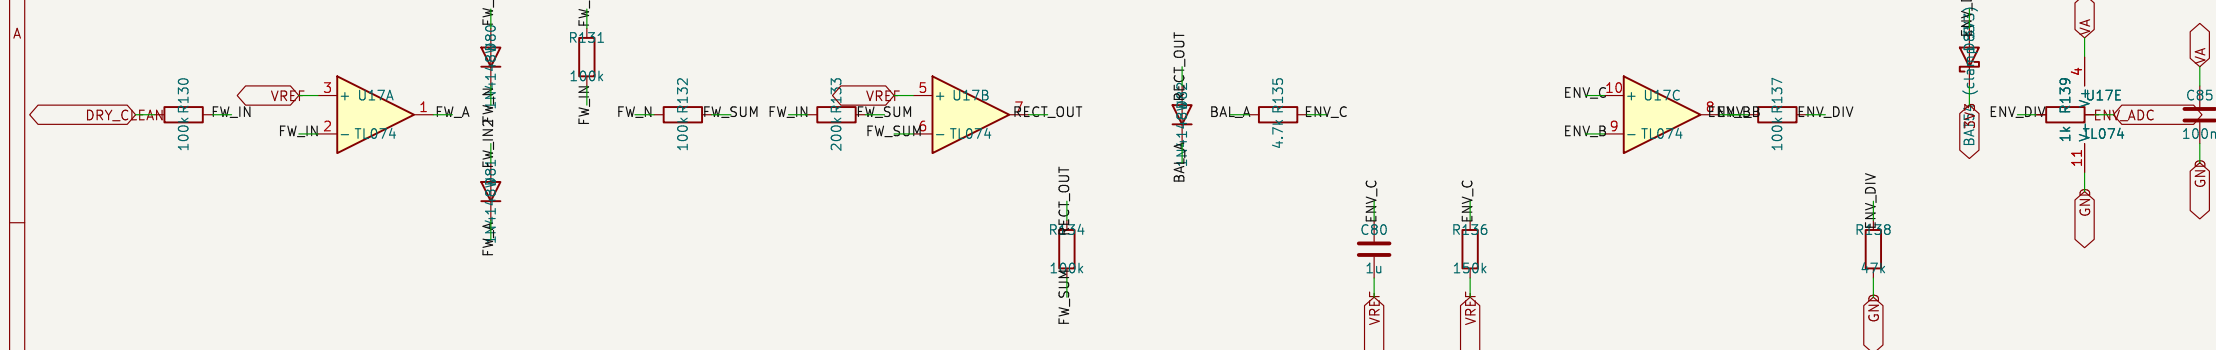