


L/OFIL (DNP pads only): the loop chatters at approx 100kHz. C43 makes the sim stray-C explicit.

e -> attenuator -> OTA -> current into CT node; range (FREQ_CV) 40625 (0 V567 range picks 1 of 4 caps. 47n/1u/22u/470u x OTA sweep covers 0.2Hz-6kHz+ with overlap.
e at labc=0. NOTE: 100k is outside the 2k-20k documented RT range
Address lines level-shifted 3.3V->V567 by Q2/Q3 (inverting - firmware flips bits).
floor only). Mux rON adds ~3.6*rON/Reff timing error - firmware cal per range.

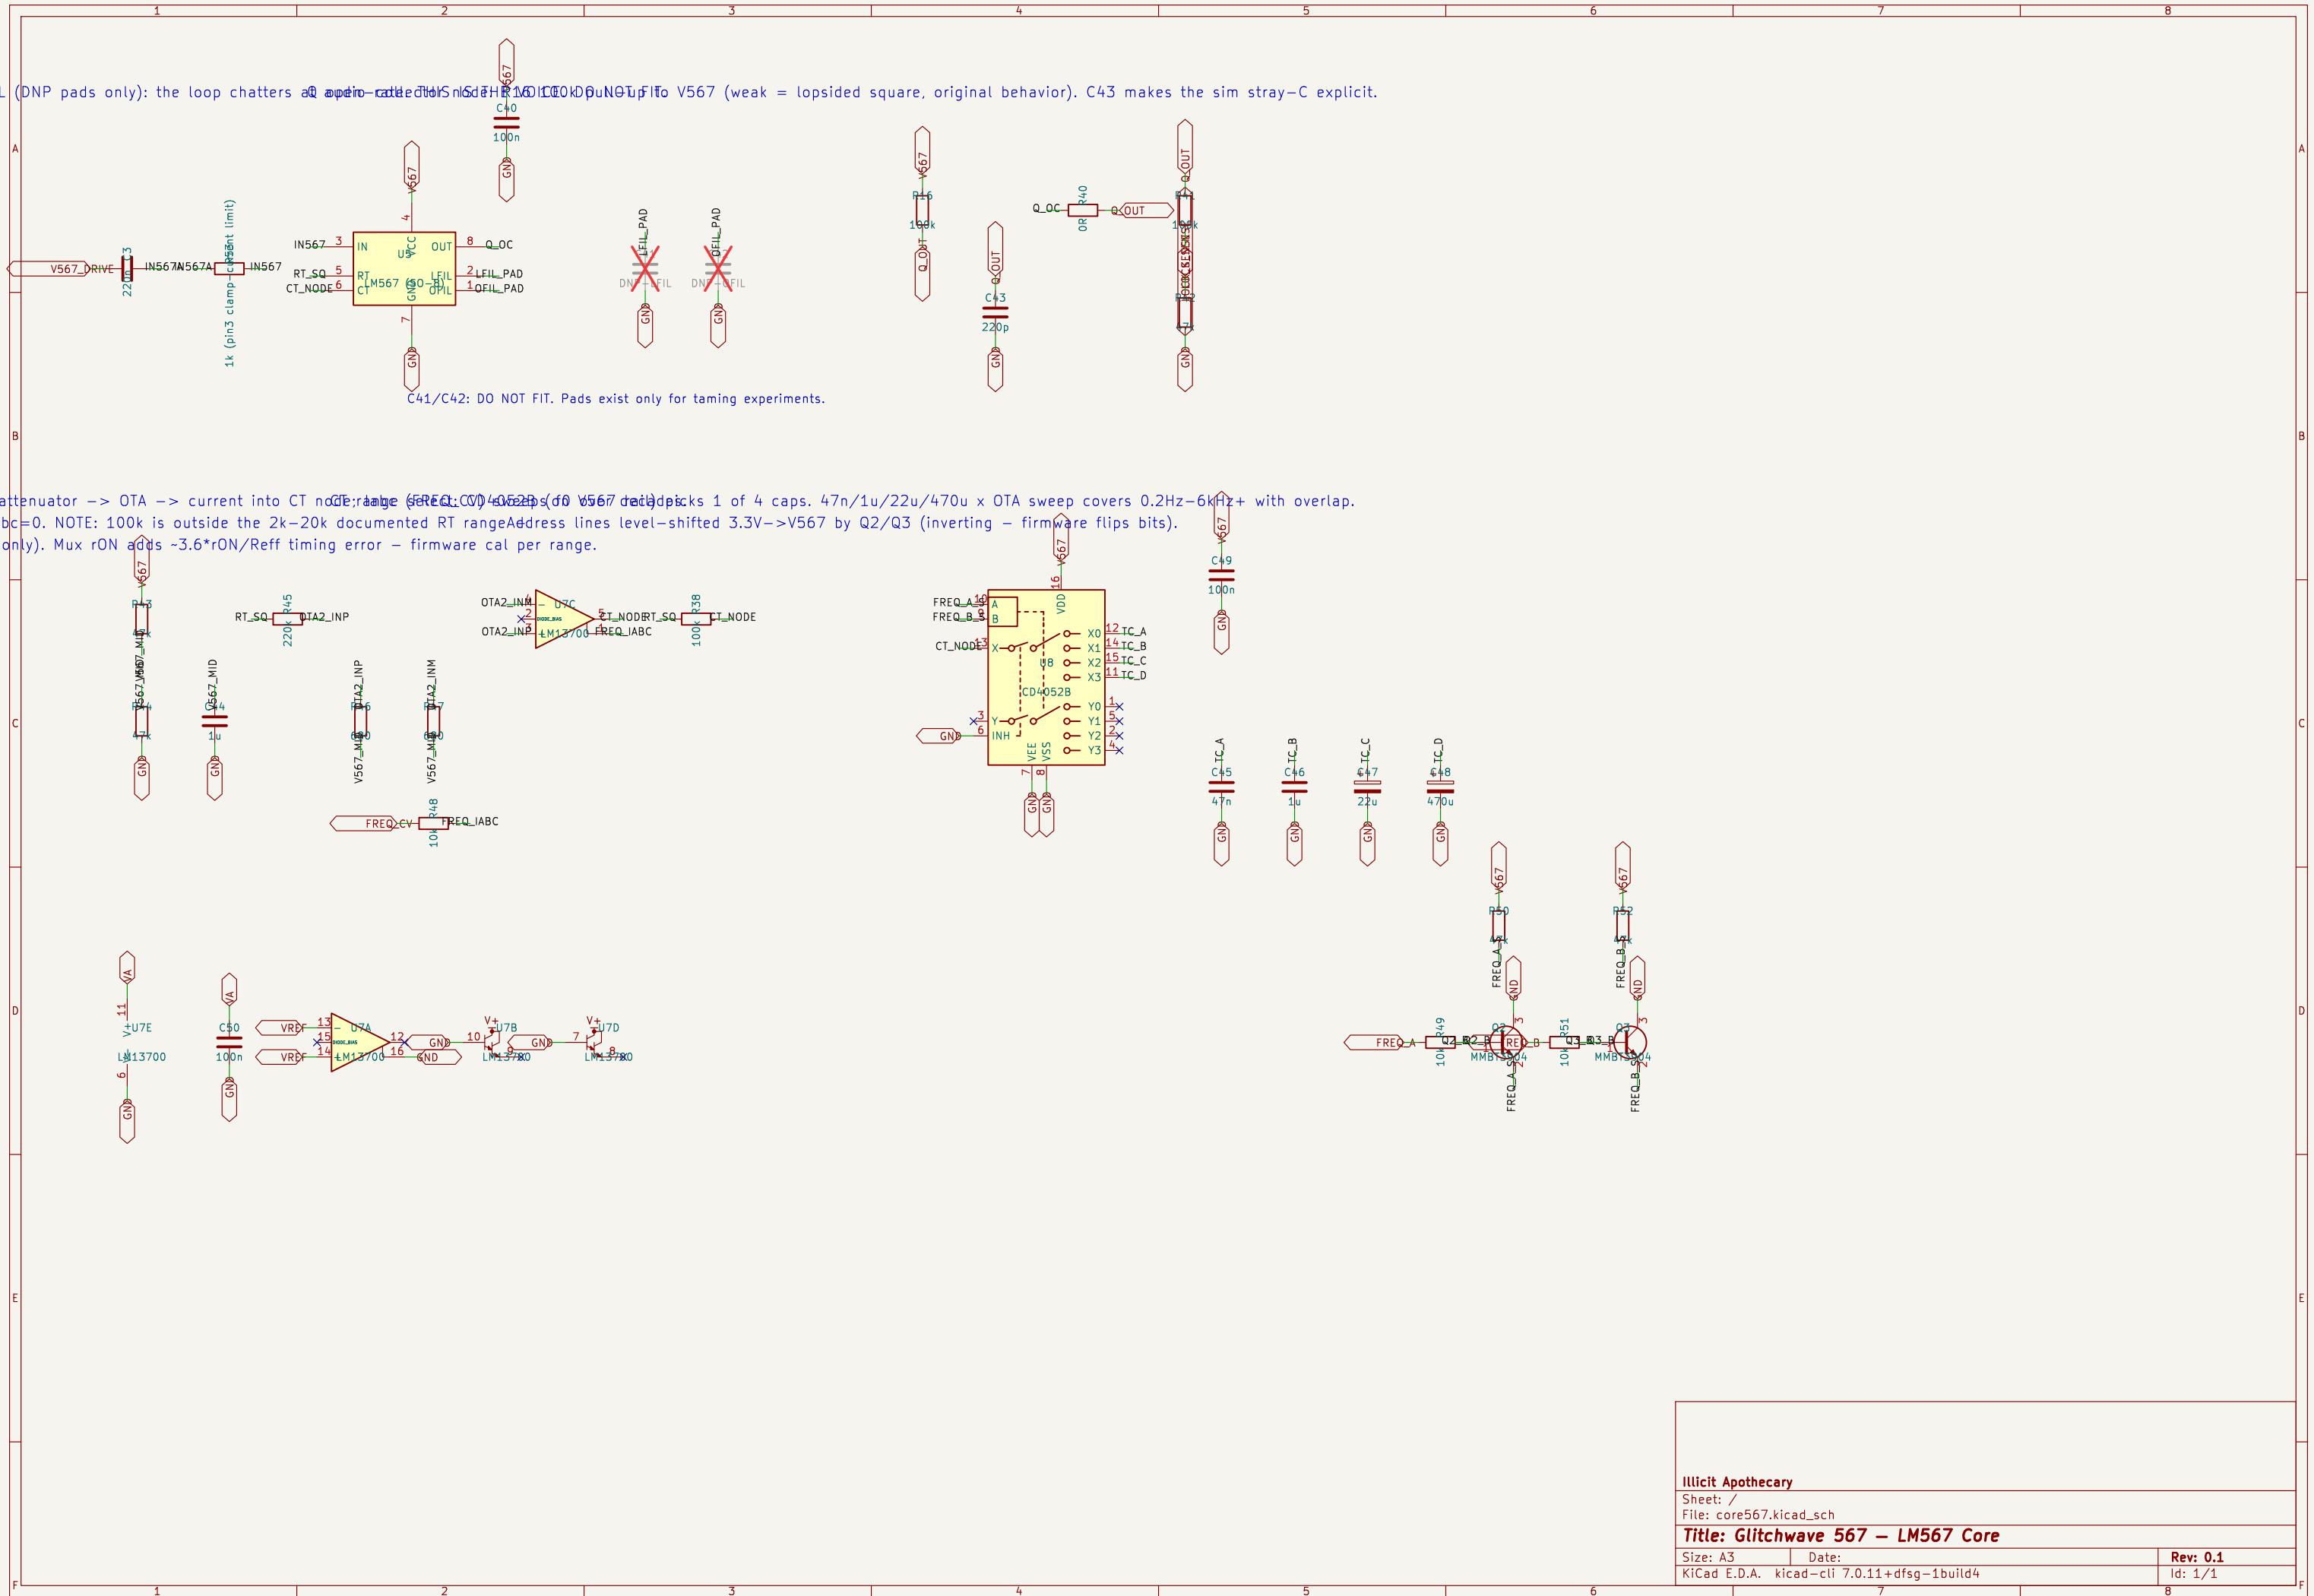

Illicit Apothecary

Sheet: /
File: core567.kicad_sch

Title: Glitchwave 567 - LM567 Core

Size: A3	Date:	Rev: 0.1
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1