



+ Mu-Tron ballistics (atk ~4ms, rel ~150ms) -> buffered, clamped -> Pico ADC.
The FEEL is FIRMWARE (matches plugin mod system); only the FEEL is analog.

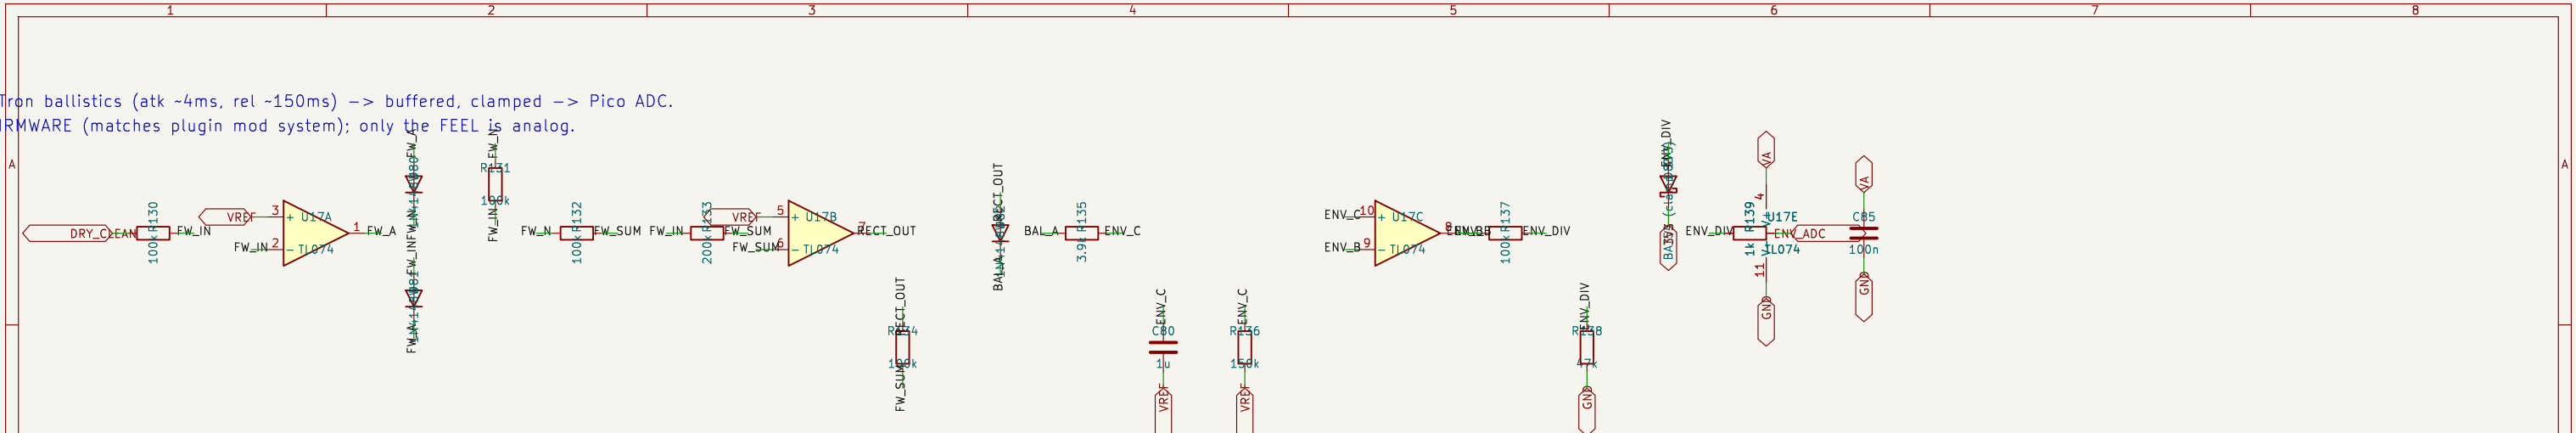

VERIFY at review: rectifier is VREF-referenced; divider maps env swing into 0–3.3V; BAT54 hard clamp.

pts up to ~10V), BAT54S rail clamps, RC slew -> AD0104C (Pico) -> 2-pole RC -> x1.52 (0–3.3 -> 0–5V) on the +5V-capable VA op-amp -> 1k -> jack.

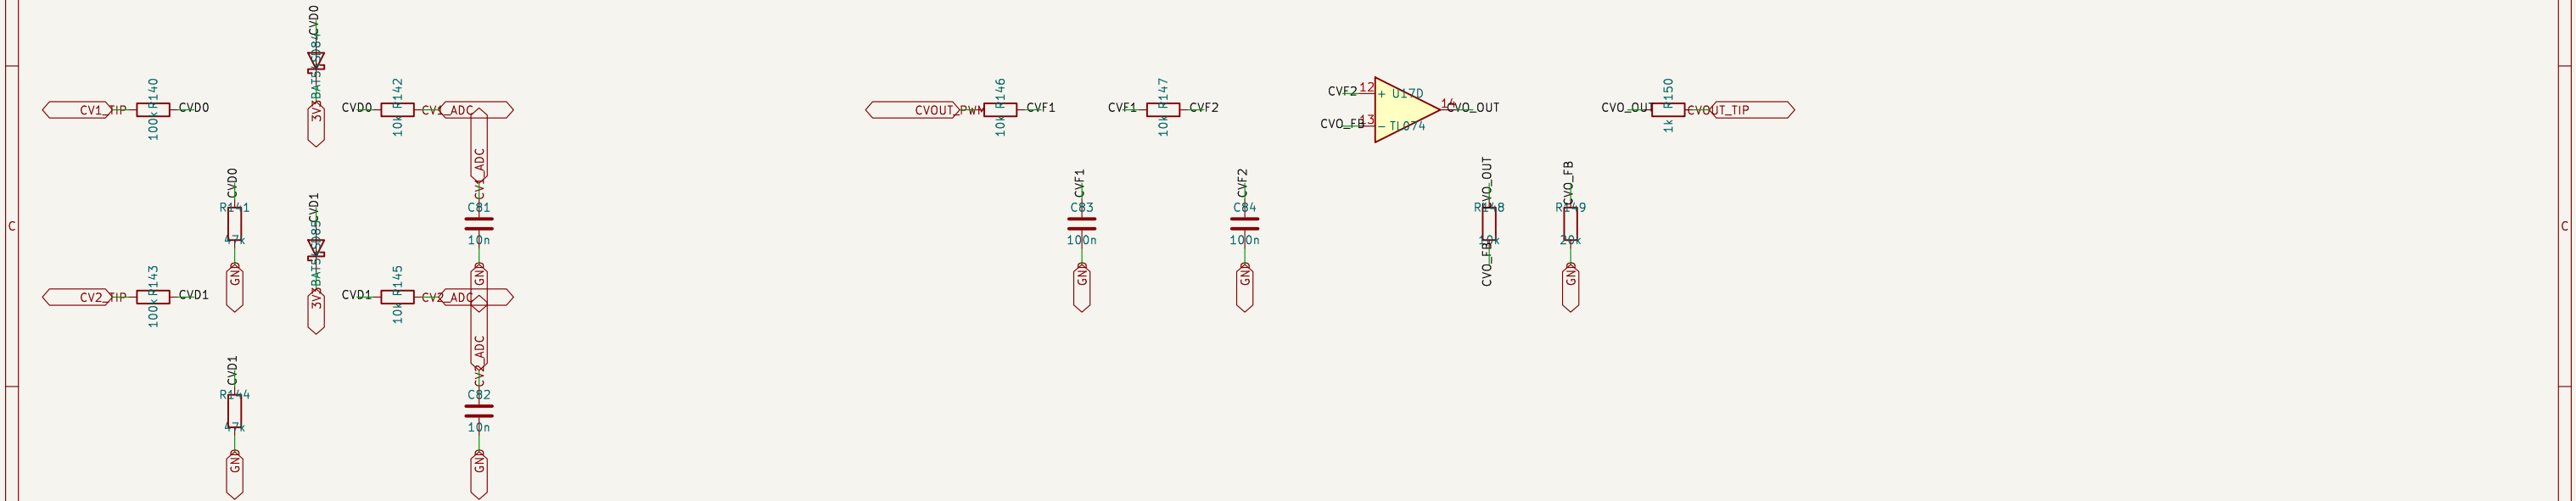

Illicit Apothecary

Sheet: /
File: env_cv.kicad_sch

Title: Glitchwave 567 – Envelope & CV

Size: A3
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Date:
Rev: 0.1
Id: 1/1