




ries, R2 2.2M load, C1 220n bWkitn3l2w2M uia d8 VRFB@49Hz1(Av=10) for two Sallen-Key HP, Q=0.54 then Q=1.31. DRY tap AFTER voicing (as in sim).

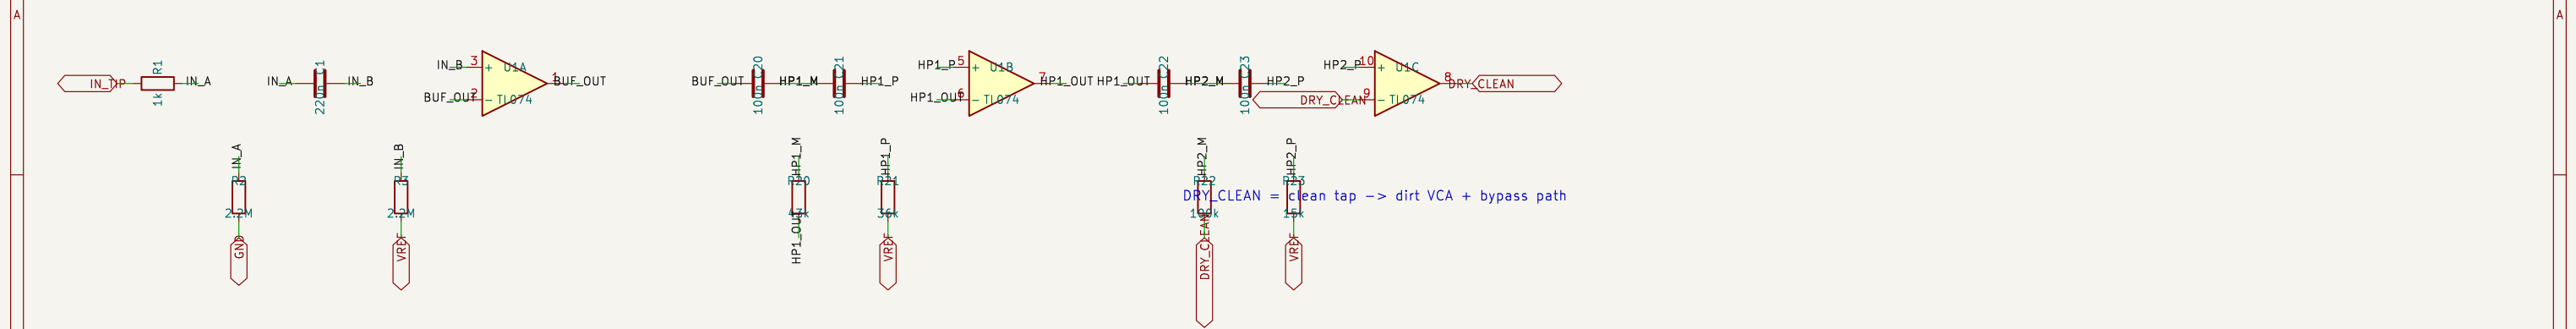

1+470k/2.2k, C2 4.7u shelf -> unity below 15.4Hz). Clips rails DIRTsGAINVCA (LM13700, replaces digipot - 5V digipot cannot pass 9V-referenced audio at 18V supply).
DIRT_CV (Pico PWM, filtered) -> labc. x1..x300 sweep = VCA attenuator + fixed x300 stage.

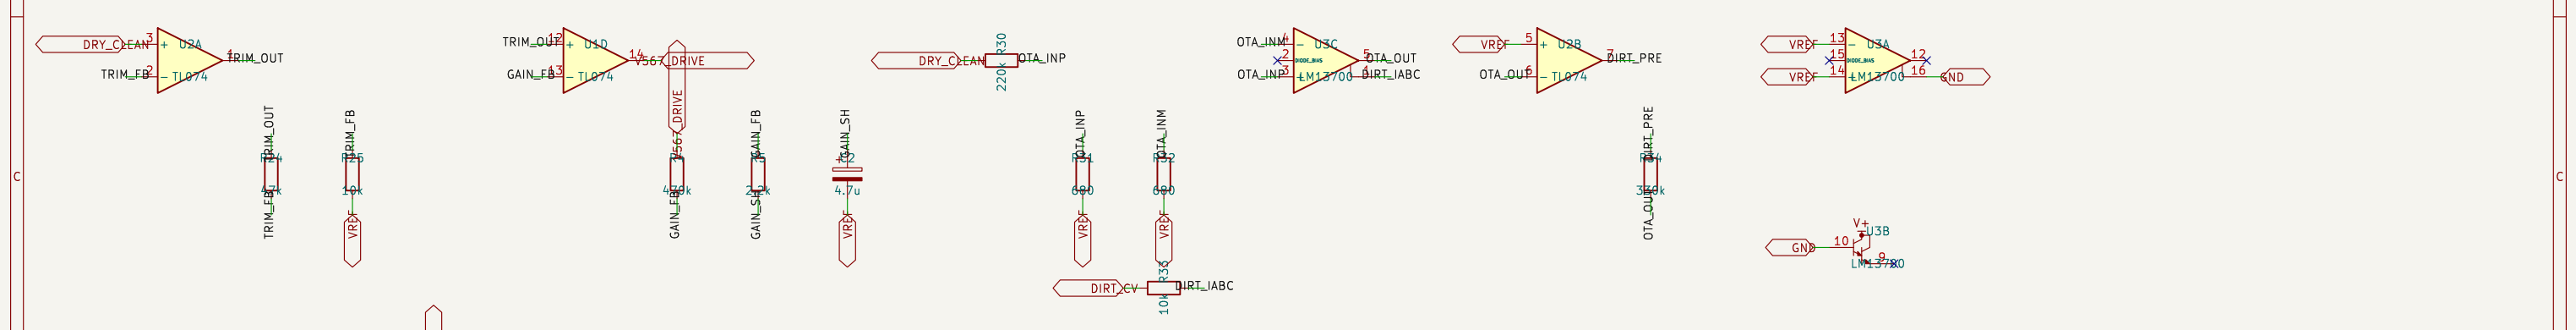

+ diode collector rail = VDIRT (starve target). 9kHz voicing LP, DC-blocked out.

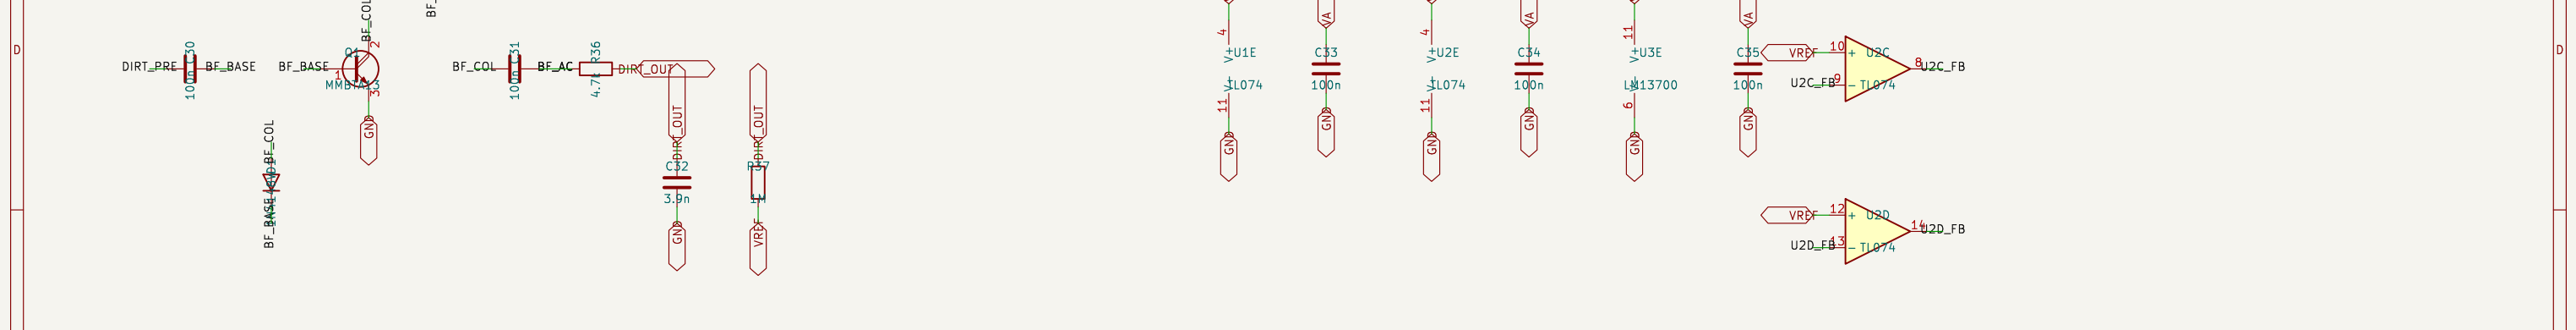

Illicit Apothecary

Sheet: /
File: input_dirt.kicad_sch

Title: Glitchwave 567 - Input & Dirt

Size: A3

Date:

Rev: 0.1

KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Id: 1/1