



1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

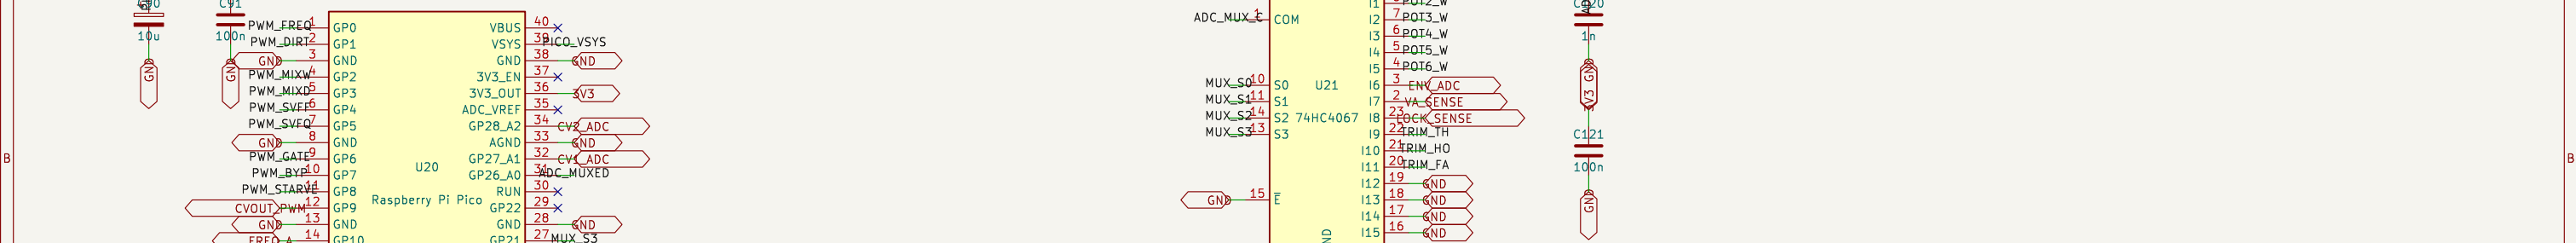

RV1-3: gate THRESH / HOLD / FADE – the “inside the pedal” trims from the sim.

t 100kHz+ in firmware). FREQ gets a SECOND pole (pitch = most FM-audible).

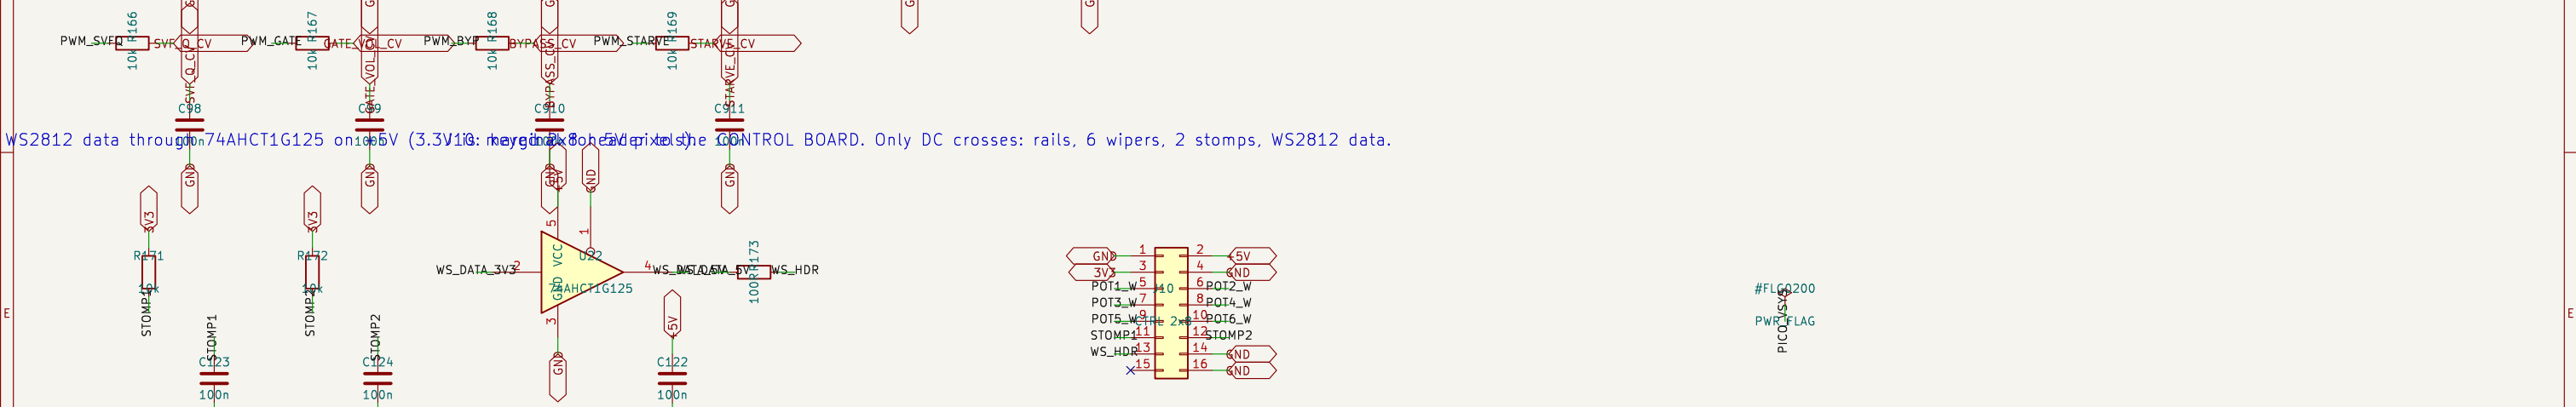

WS2812 data through 74AHCT1G125 on 1.65V (3.3V I/O: 3.3V) on 5V pin of the CONTROL BOARD. Only DC crosses: rails, 6 wipers, 2 stomps, WS2812 data.

Illicit Apothecary		
Sheet: /		
File: mcu.kicad_sch		
Title: Glitchwave 567 – MCU (Pico)		
Size: A3	Date:	Rev: 0.1
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1