


2Hz, original) -> 12dB/oct HP@60 -> +3dB bell@800 Q0.5 -> +6dB switch.

s IN): big 2nd harmonic, asym squish. SW2 selects ladder or bypass (bypass ships OUT): pos half soft 3-step, neg half 2-step. VALUES ARE STARTING POINTS – the sim curves are ground truth; final R values tuned against plugin A/B at breadboard/review. SW3 selects ladder or bypass.

5B = clean-bypass VCA (DRY_CLEAN). Currents sum -> U16A -> buffer -> R13 470R -> OUT.
tied = OTA CURRENT summing (intentional; ERC output-output waiver).

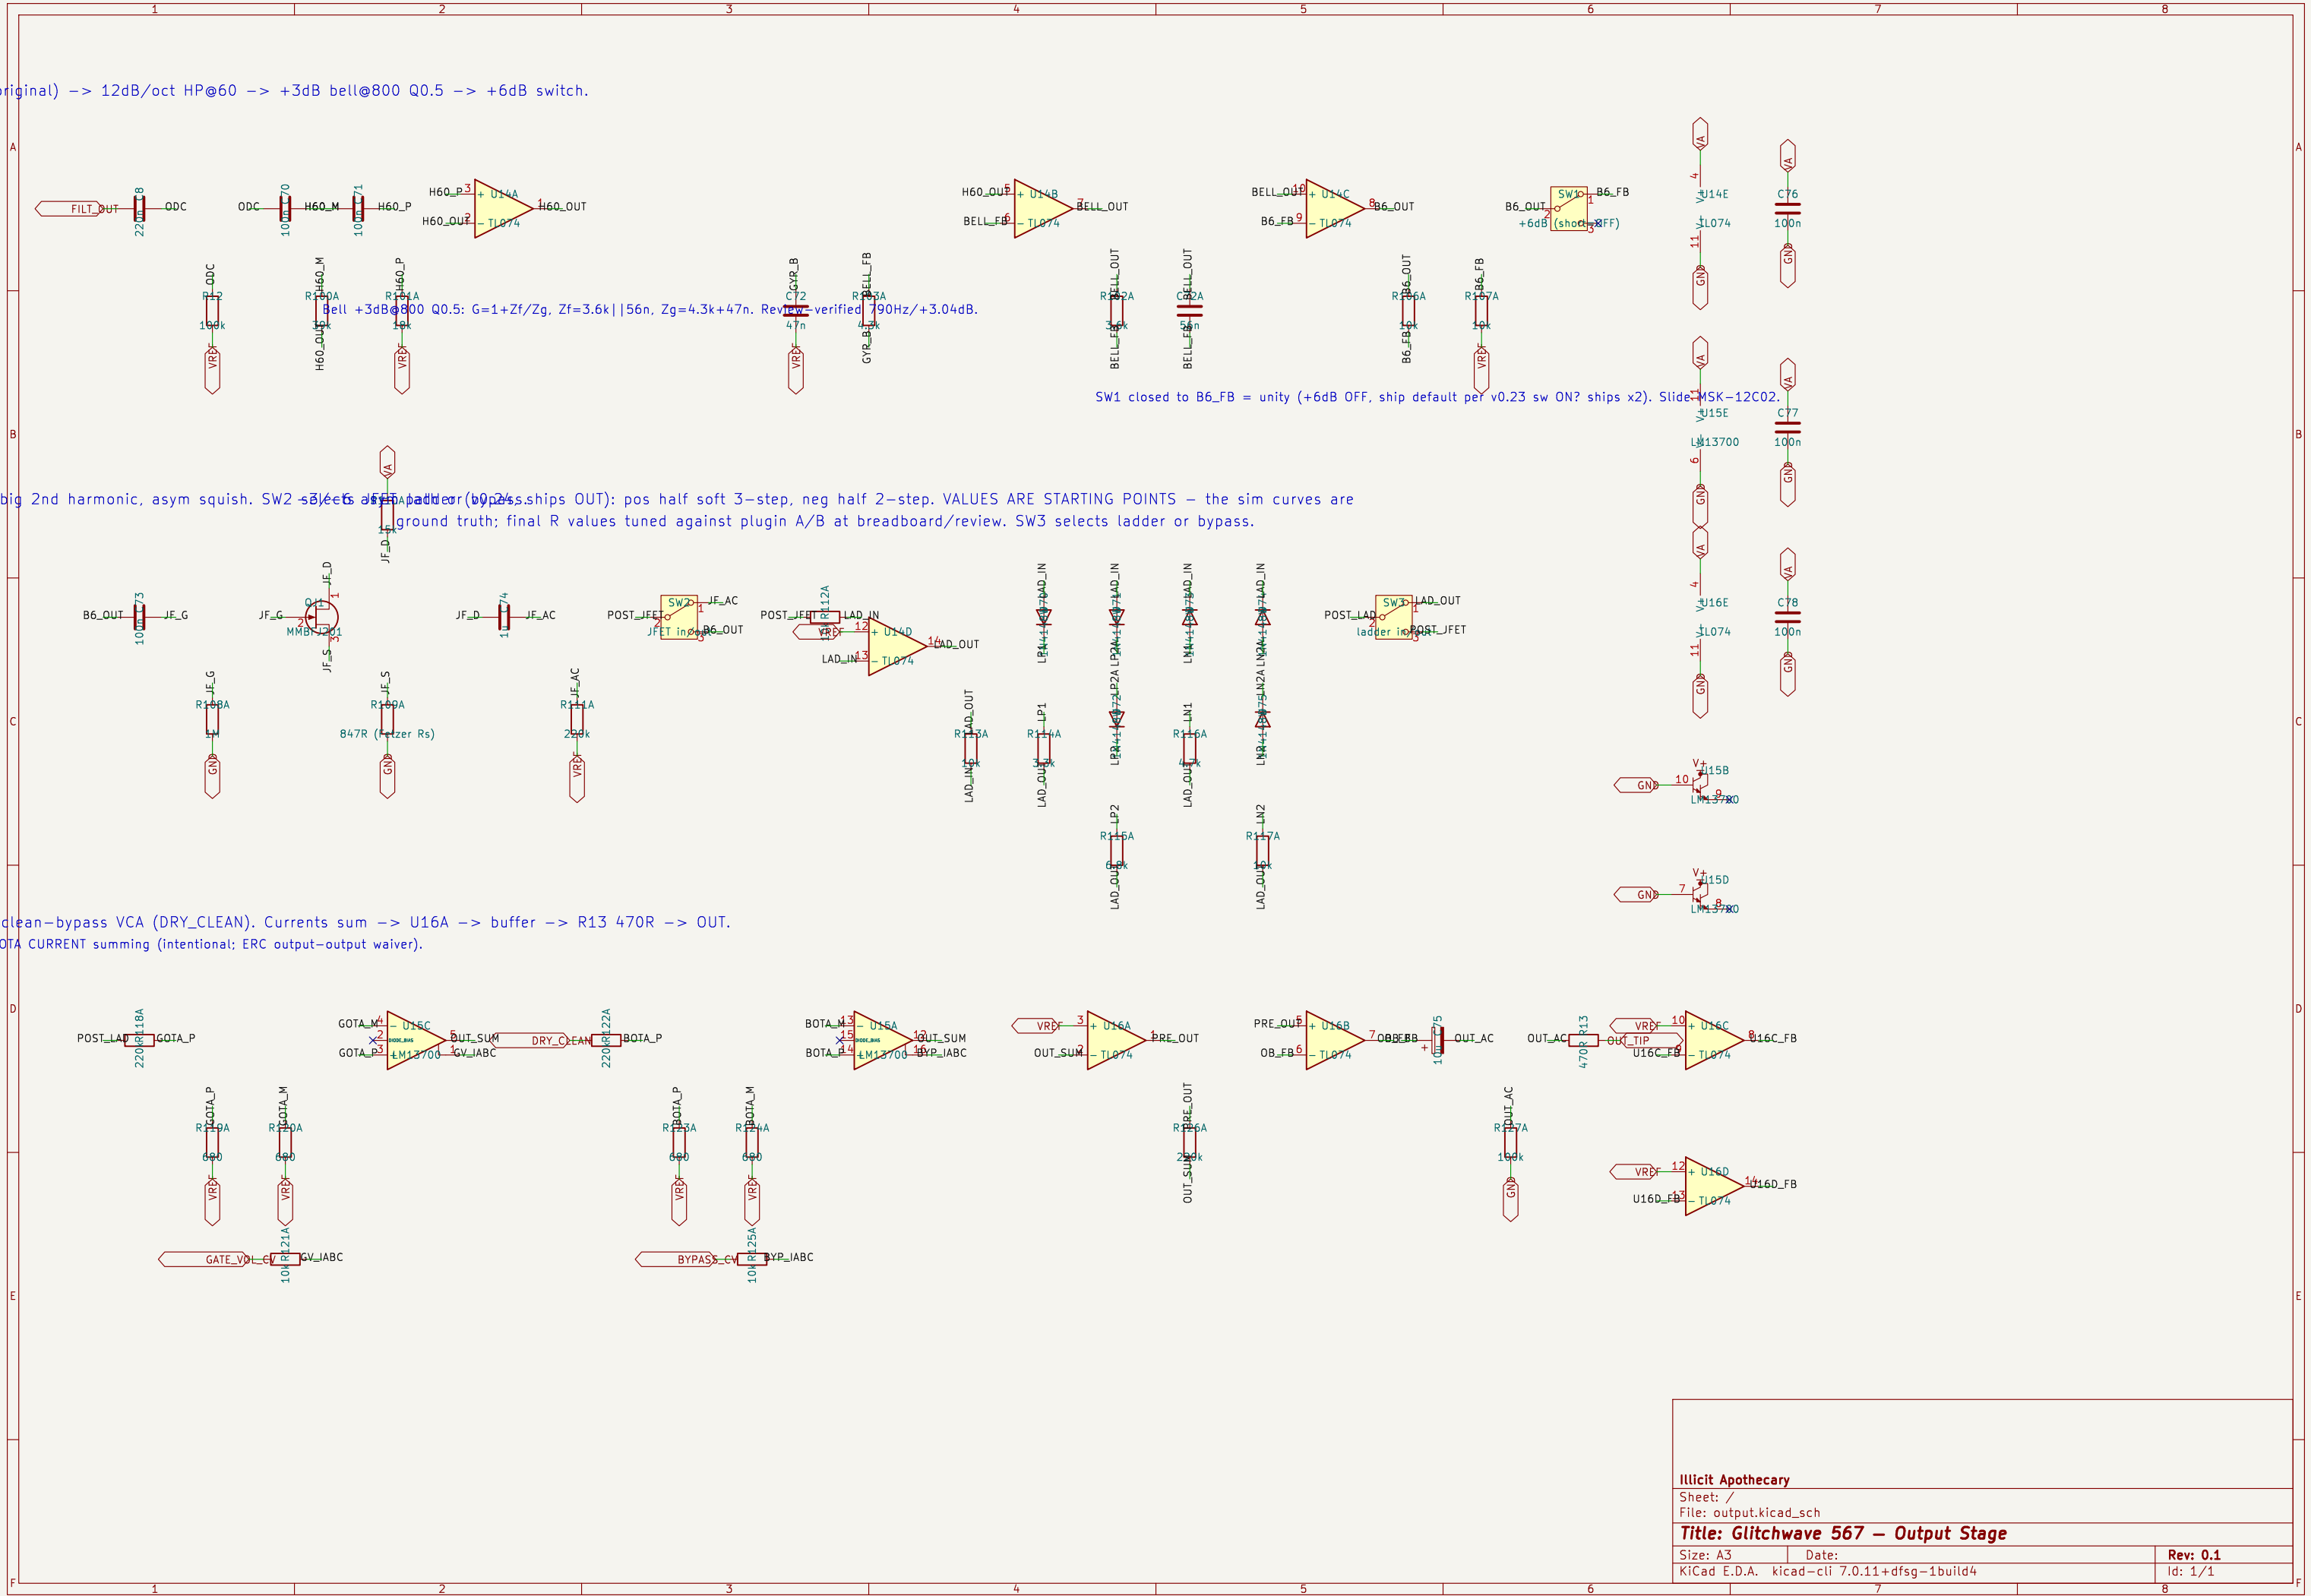

Illicit Apothecary

Sheet: /
File: output.kicad_sch

Title: Glitchwave 567 – Output Stage

Size: A3 Date:
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Rev: 0.1
Id: 1/1