L/OFIL (DNP pads only): the loop chatters at audio-rate
Q open-collector node: R16 100k pull-up to V567 (weak = lopsided square, original behavior). C43 makes the sim stray-C explicit.

C41/C42: DO NOT FIT. Pads exist only for taming experiments.

e -> attenuator -> OTA -> current into CT node; range (FREQ_CV) sweeps f0 over decades.
ive at Iabc=0. Original was R6 3.6k + B10k pot with C4 220n (304-1148Hz).

CT cap select: CD4052B (on V567 rail) picks 1 of 4 caps. 47n/1u/22u/470u x OTA sweep covers 0.2Hz-6kHz+ with overlap.
Address lines level-shifted 3.3V->V567 by Q2/Q3 (inverting - firmware flips bits).

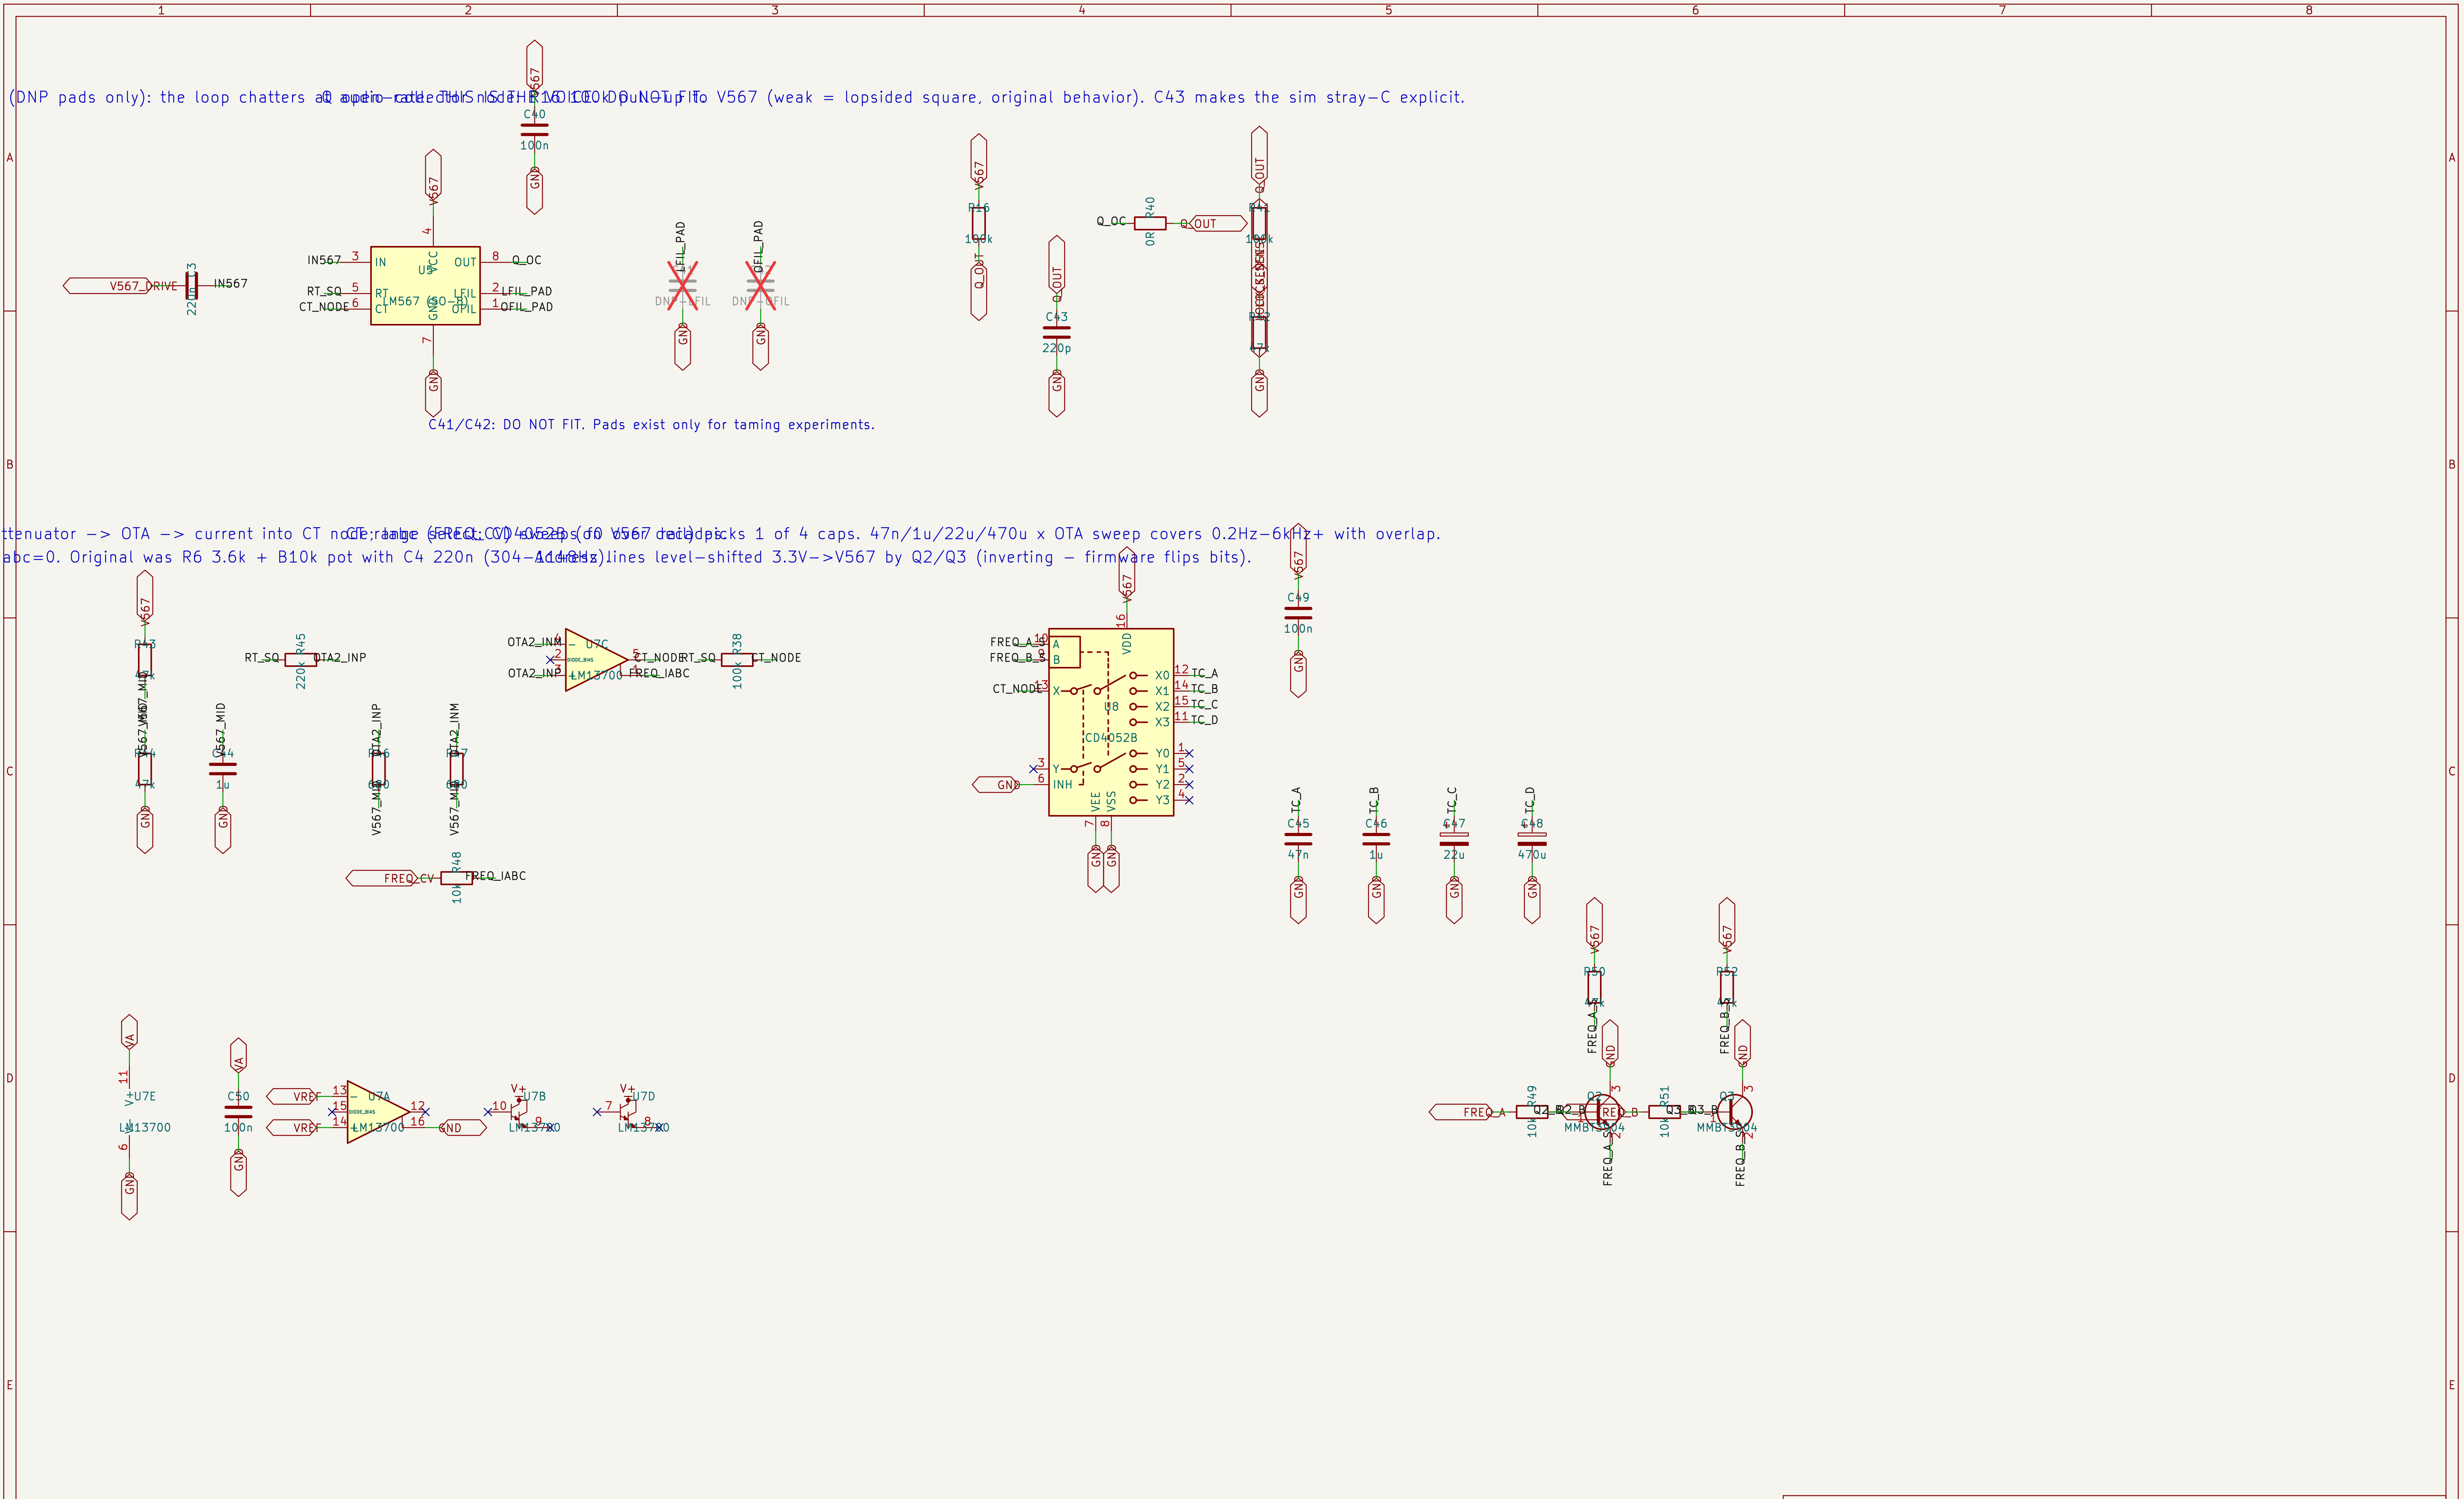

Illicit Apothecary
Sheet: /
File: core567.kicad_sch

Title: Glitchwave 567 — LM567 Core

Size: A3	Date:	Rev: 0.1
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1