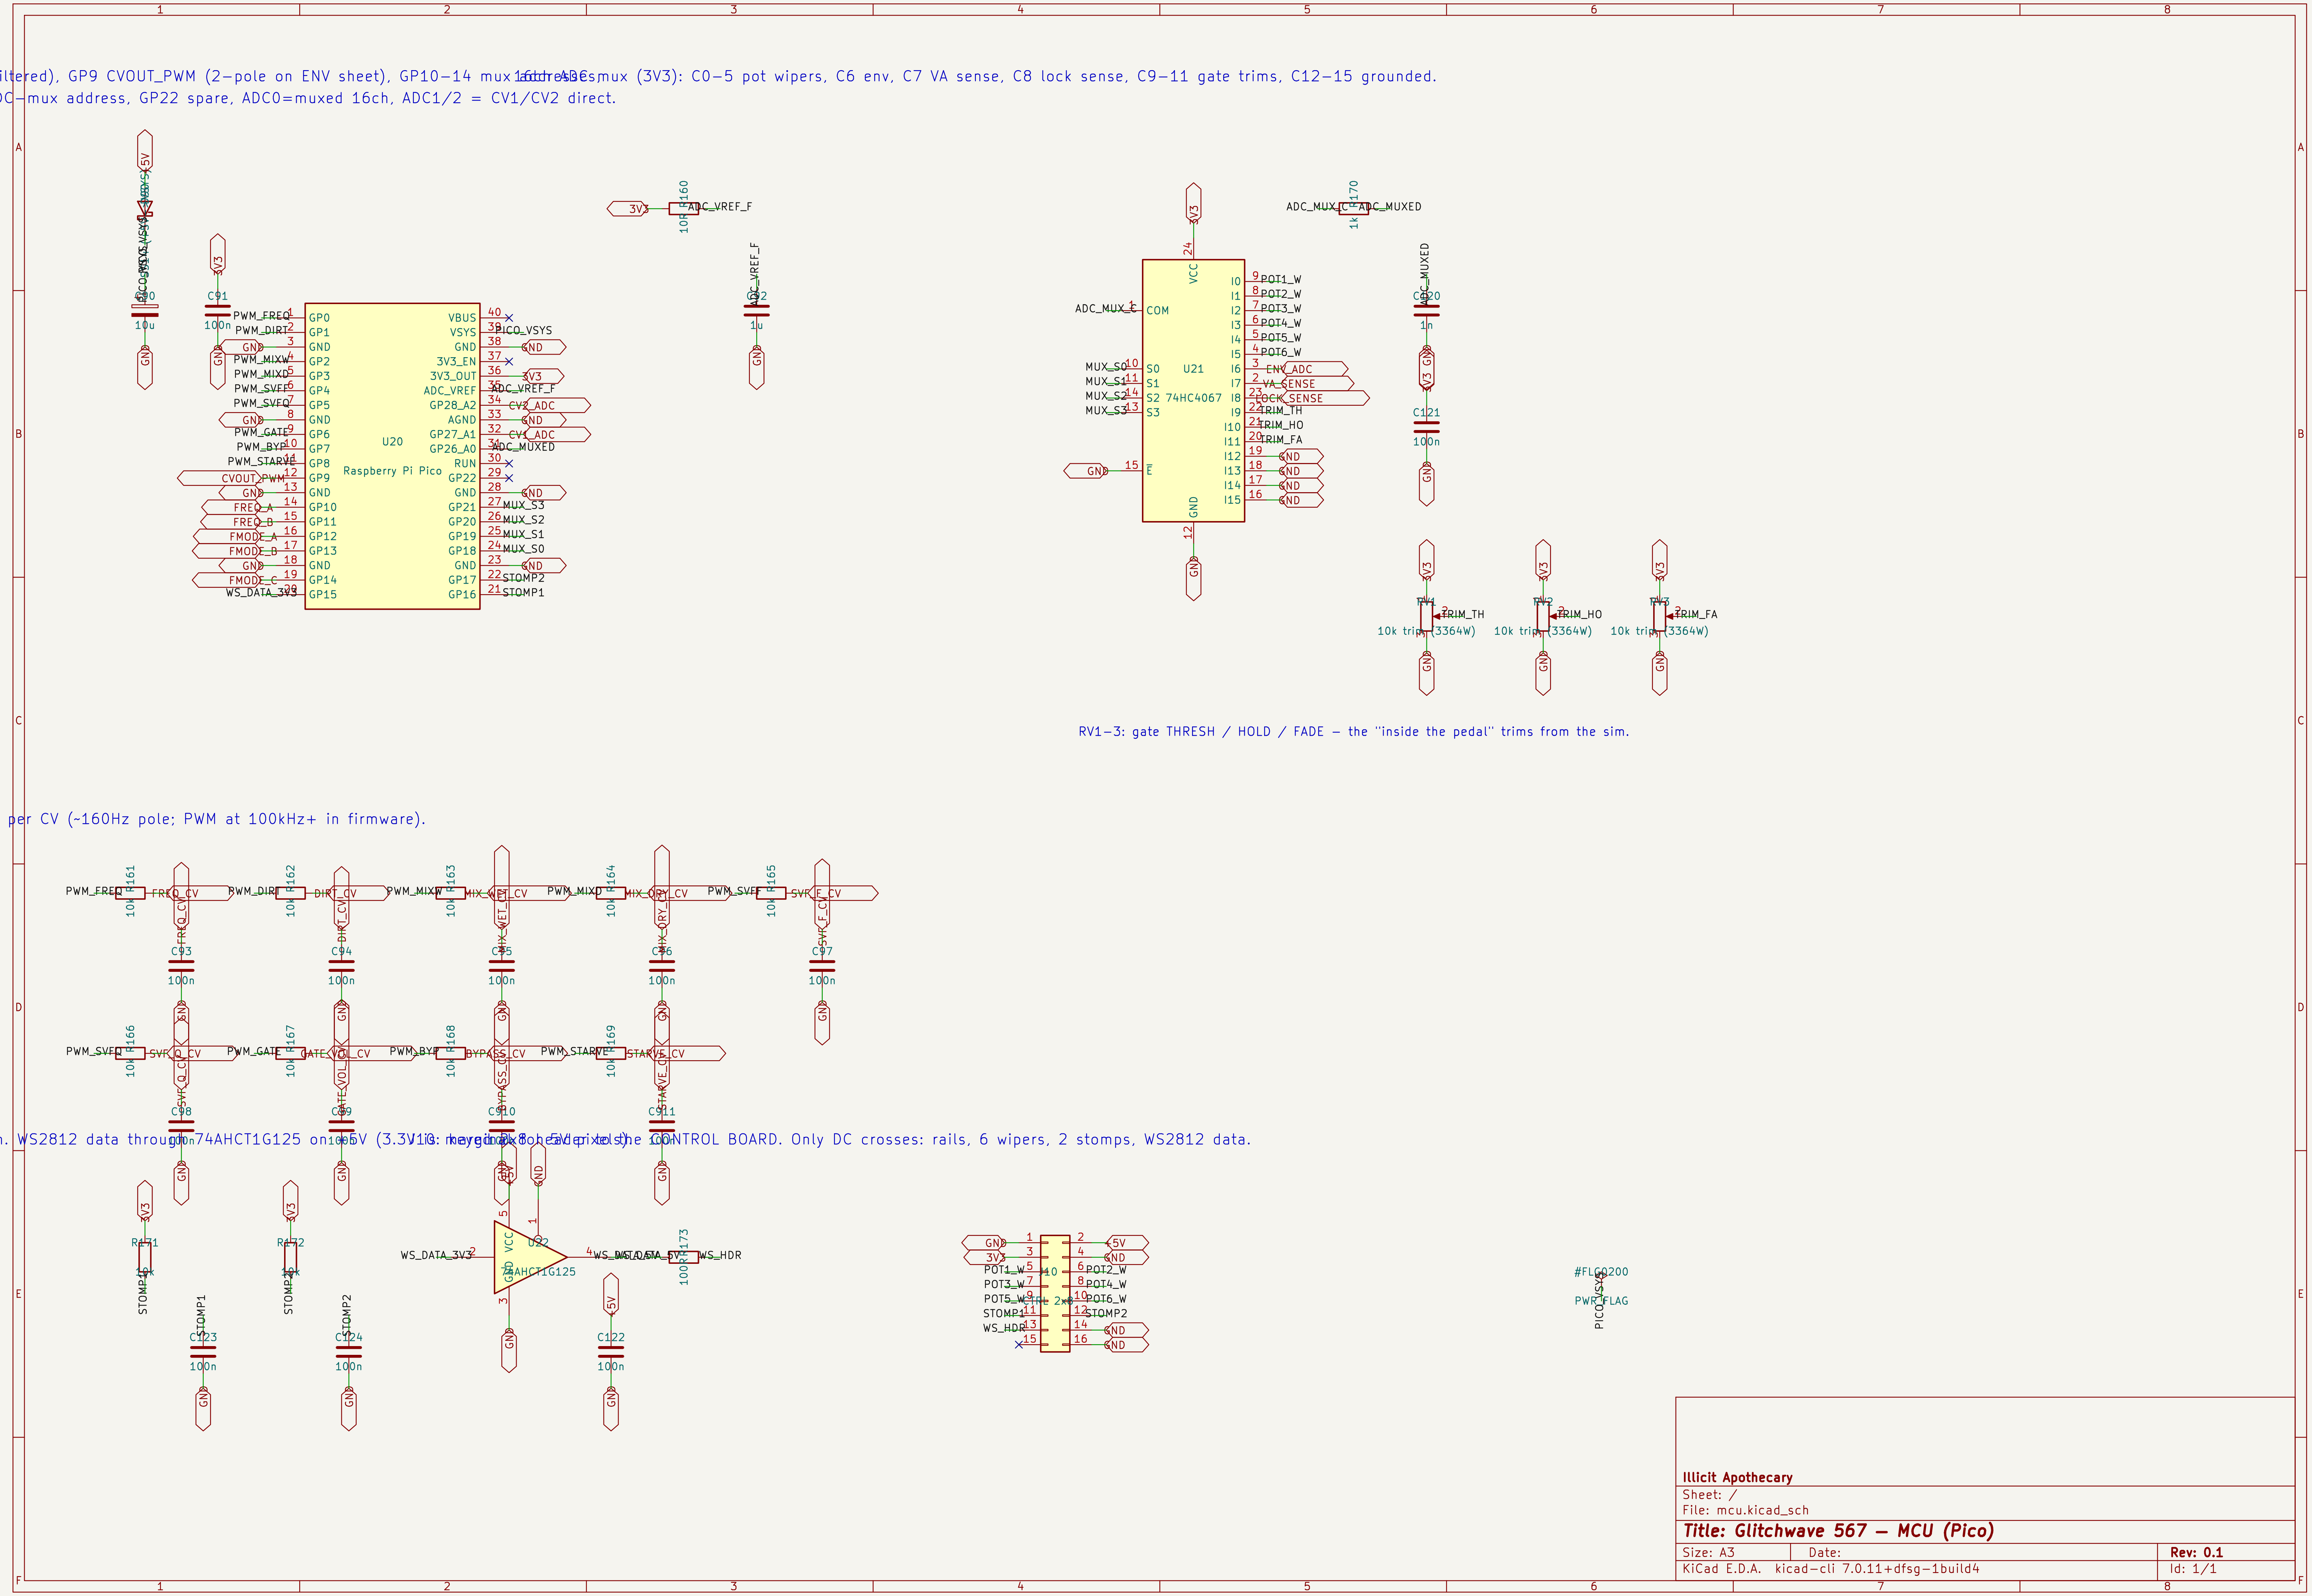

(RC filtered), GP9 CVOUT_PWM (2-pole on ENV sheet), GP10-14 mux 16ch ADC mux address,
67 ADC-mux address, GP22 spare, ADC0=muxed 16ch, ADC1/2 = CV1/CV2 direct.
16ch ADC mux (3V3): C0-5 pot wipers, C6 env, C7 VA sense, C8 lock sense, C9-11 gate trims, C12-15 grounded.
RV1-3: gate THRESH / HOLD / FADE - the "inside the pedal" trims from the sim.
100n per CV (~160Hz pole; PWM at 100kHz+ in firmware).
100n. WS2812 data through 74AHCT1G125 on +5V (3.3V→5V level for pixels).
Via keyed 2x8 header to the CONTROL BOARD. Only DC crosses: rails, 6 wipers, 2 stomps, WS2812 data.
Raspberry Pi Pico
74HC4067
74AHCT1G125
Illicit Apothecary
Sheet: /
File: mcu.kicad_sch
Title: Glitchwave 567 — MCU (Pico)
Size: A3
Date:
Rev: 0.1
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4
Id: 1/1