



=GND, sleeve=+V) -> P-FET reverse protect -> ferrite -> VA (raw analog rail) LM567 rail: 78L09 (chip abs max $P_D = 10W$) 2 mid-rail, buffered (R14/R15/C10 of the original schematic)

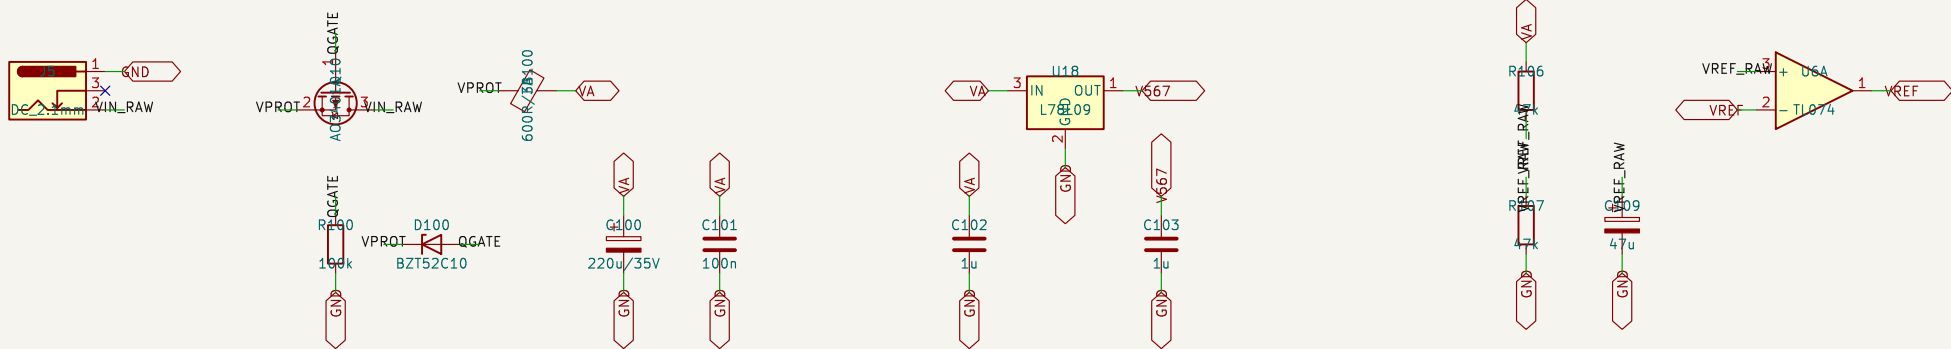

812). VERIFY COMP/FREQ/FB values vs MP1584 datasheet at review pass

STARVE servo: Pico PWM (STARVE_CV 0-3.3V) x5.45 -> commands VDIRT; 6V2 zener floor = 5.0V at emitter
VDIRT feeds ONLY the Bazz Fuss rail. VA_SENSE -> Pico ADC so firmware scales the law to the supply

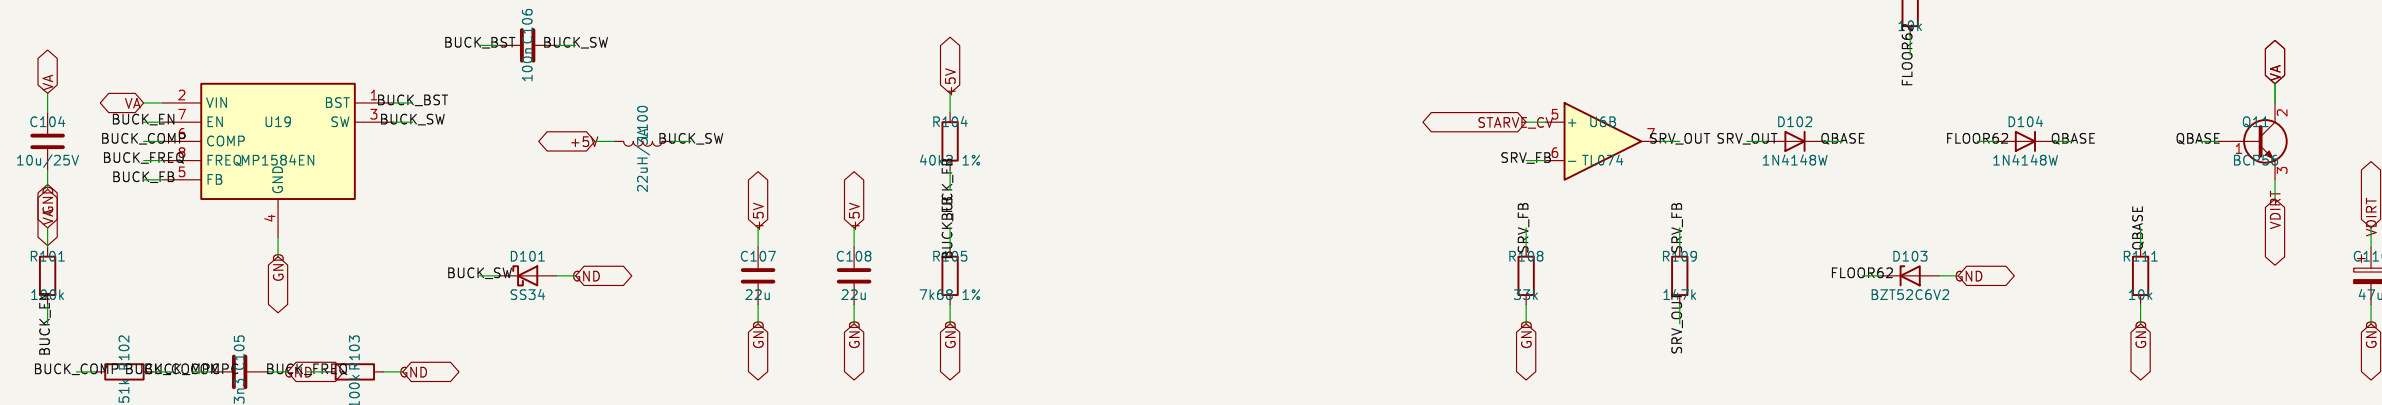

VA_SENSE: 18V -> 3.25V

Illicit Apothecary

Sheet: /
File: power.kicad_sch

Title: **Glitchwave 567 – Power**

Size: A3

Date:

Rev: 0.1

KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Id: 1/1