

QuadPreRecorder Rev C3


Enclosure preview with all ports and controls labeled. Hammond 1590XX, 145.2 x 121.2 x 39.3 mm.

Illicit Apothecary

Face	Ref	Function
Lid	TFT	3.5 inch capacitive touch display (MSP3526), near-flush window 85.5 x 56 mm
Lid	SW2	Record button
Lid	SW3	Rotary encoder, push + turn
Lid	SW4	5-way navigation switch (tilt 4 ways + press)
Front	J4	1/4 inch line output (Neutrik locking jack)
Front	D4 / D5	Status LEDs (red / green)
Rear	J1	9 V DC input, barrel jack
Rear	J9	USB-C, charging + data
Rear	SD	Micro-SD card slot (Teensy)
Left	J2	CAT6 microphone input, shielded RJ45, 4 balanced channels + shield
Right	J5	3.5 mm headphone output


Positions are taken from the routed Rev C3 board. Wall-feature heights are approximate for illustration; drilling is done from the 1:1 printed templates, not from this document. An interactive 3D version of this model is available as an HTML file that opens in any web browser.

QuadPreRecorder Rev C3 Hammond 1590XX enclosure, 145.2 x 121.2 x 39.3 mm. Drag to rotate, scroll to zoom.

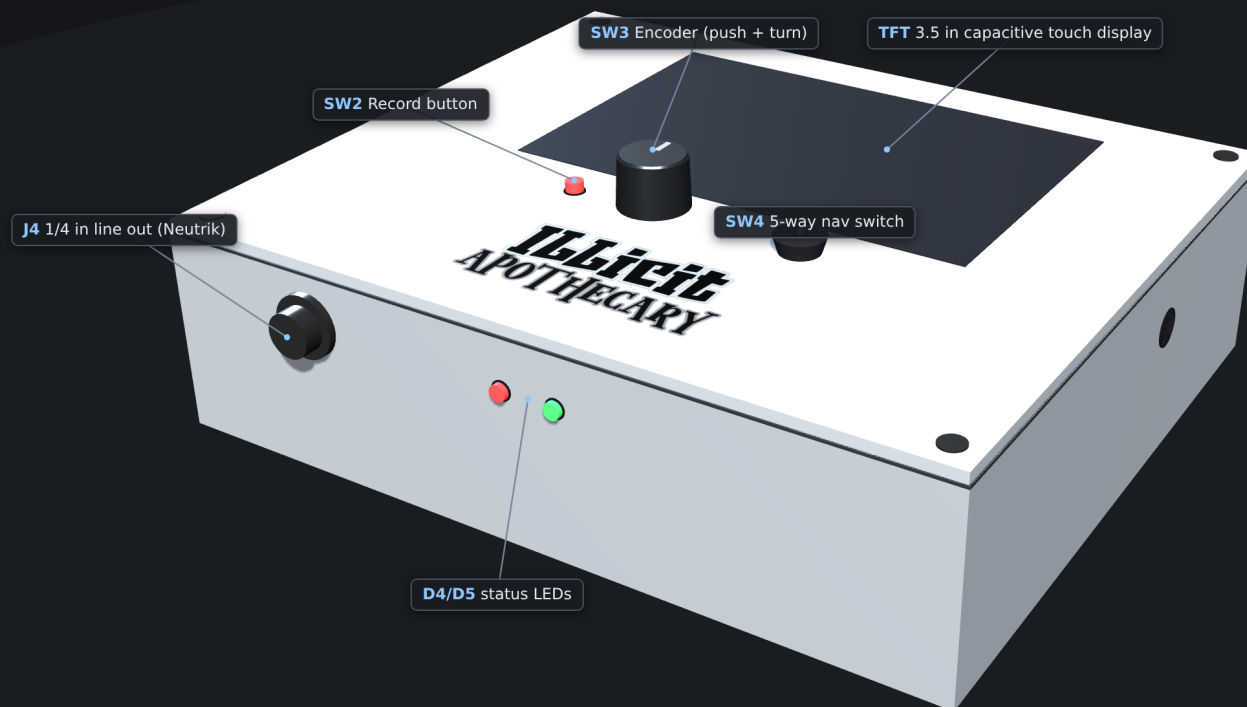


illicit Apothecary


Front three-quarter view

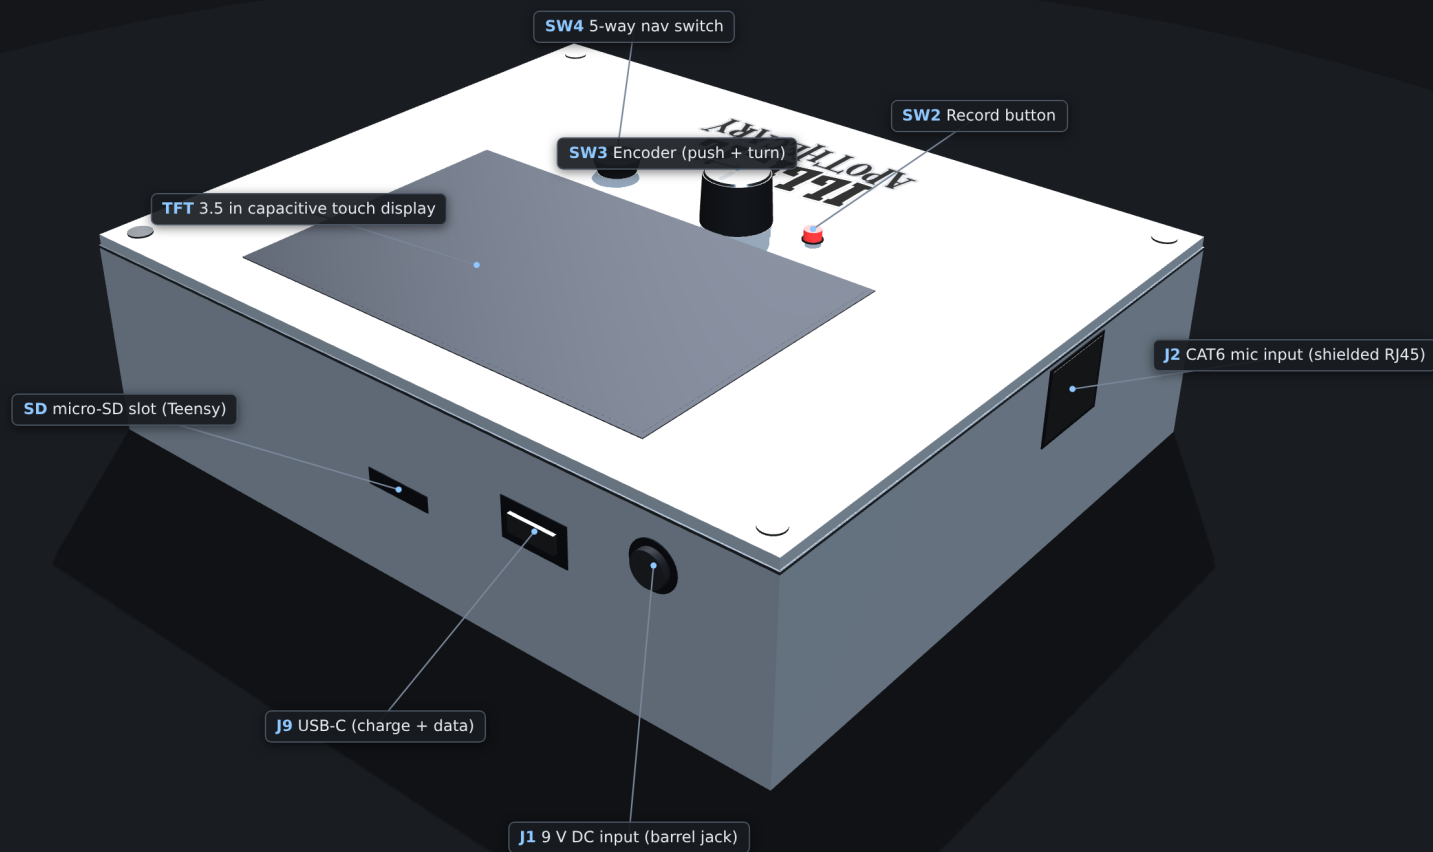


Rear three-quarter view

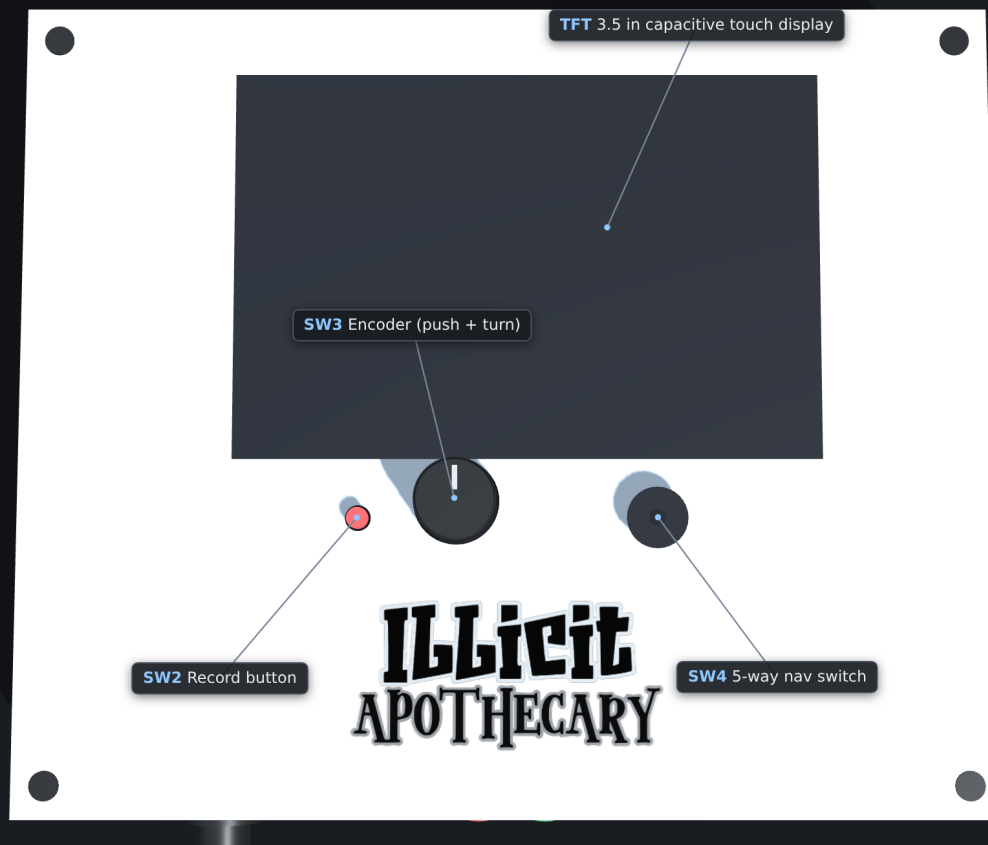

Top (lid controls and display)

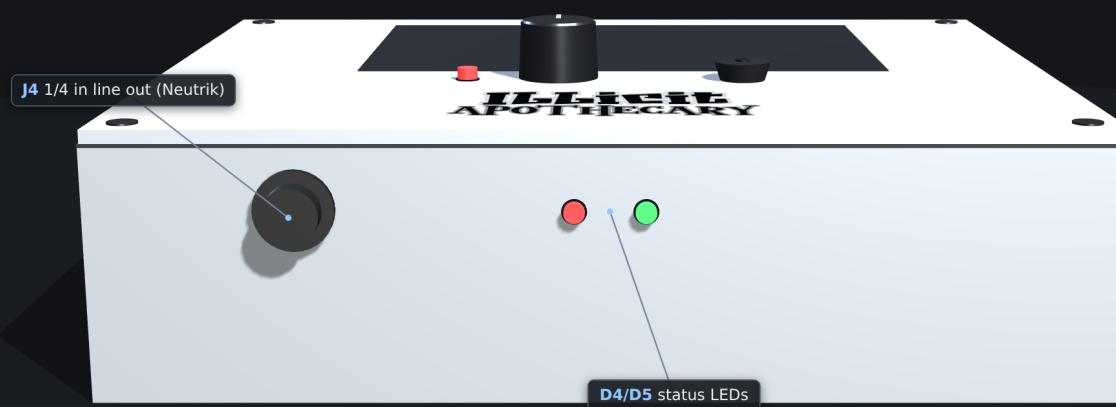


Front wall: J4 line out, D4/D5 status LEDs

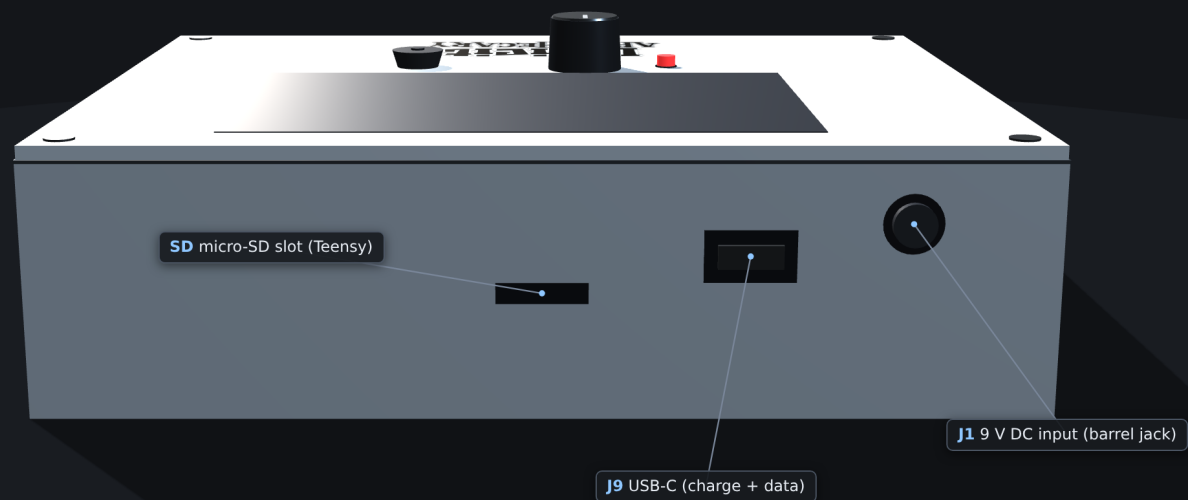

Rear wall: J1 9V DC, J9 USB-C, micro-SD


QuadPreRecorder Rev C3 Hammond 1590XX enclosure, 145.2 x 121.2 x 39.3 mm. Drag to rotate, scroll to zoom.

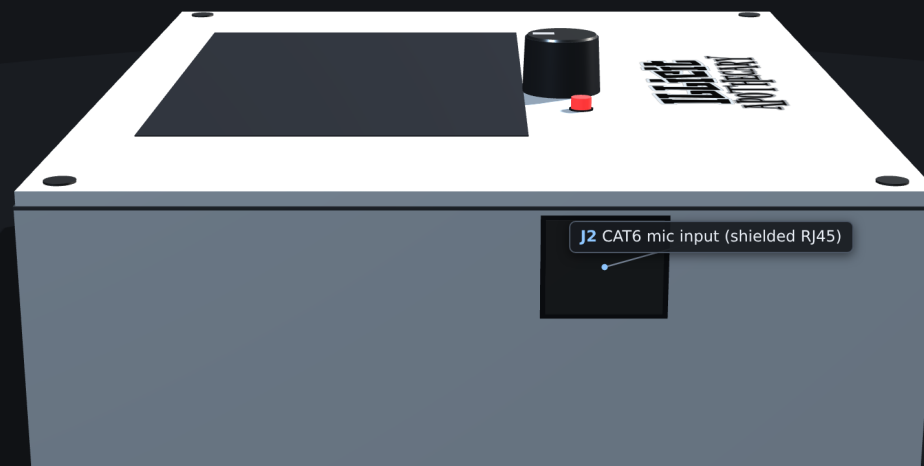

Illicit Apothecary

Left wall: J2 CAT6 mic input

QuadPreRecorder Rev C3 Hammond 1590XX enclosure, 145.2 x 121.2 x 39.3 mm. Drag to rotate, scroll to zoom.

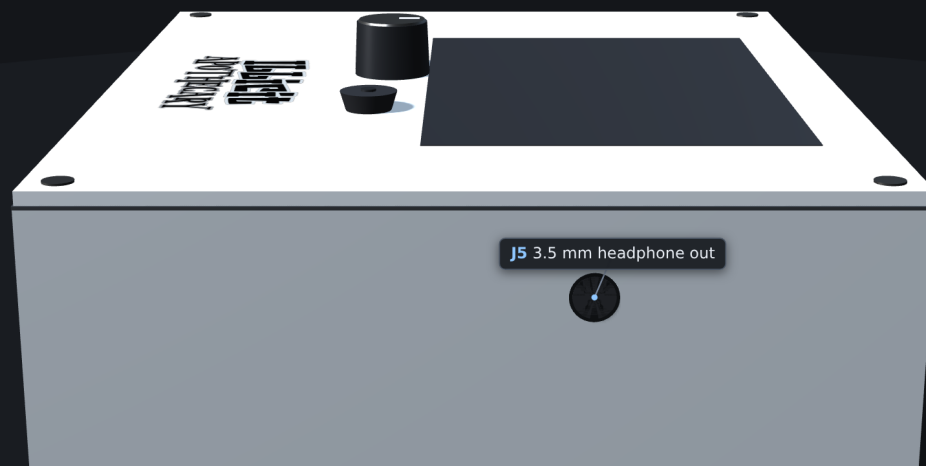

Illicit Apothecary

Right wall: J5 headphone out