



192 kHz / 24-bit capture • real-time binaural monitor • two-layer Rev C (Hammond 1590XX, ~~USB-C~~)

192 kHz / 24-bit capture • real-time binaural monitor • two-layer Rev C (Hammond 1590XX, ~~USB-C~~)

POWER: 9 V barrel / USB-C 5 V / 1S LiPo (BQ24074 charger, USB only) -> TPS61175 boost 10.45 V -> ADP7142 LDO 9 V analog rails 5 V buck; 3.3 V audio LDO. Soft power hold RECORD + encoder push 2 s (Q3/Q4 latch, KEEP ON).

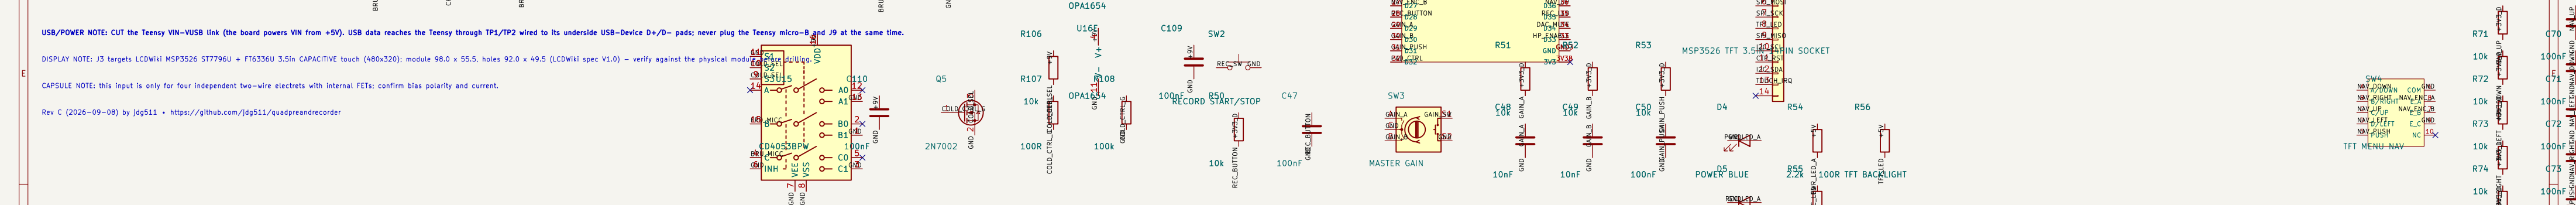

15 LiPo 5000 mAh on J10 (bottom), BQ24074 charges from USB only (0.74 A); the barrel and the boost bypass it. Hold RECORD + encoder push 2 s to power on/off on battery; USB or 9 V power the unit automatically

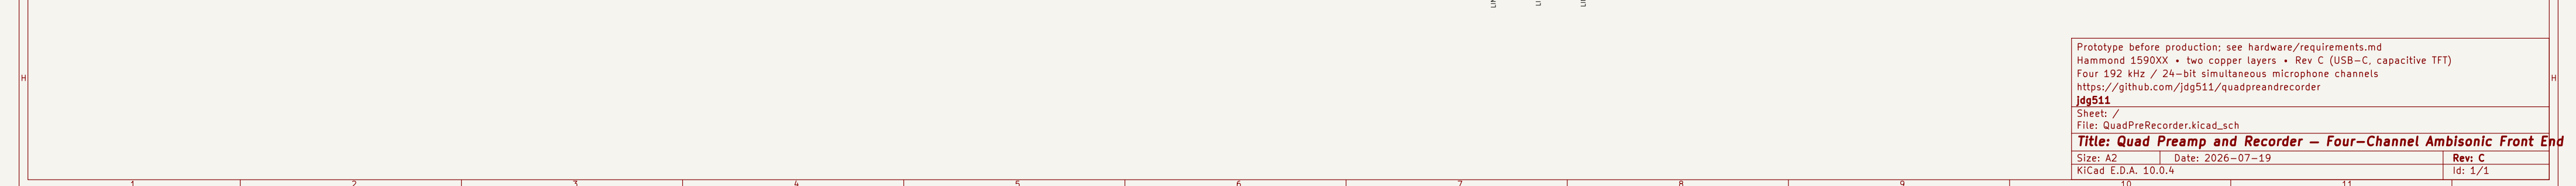

A horizontal number line with arrows at both ends. There are two major tick marks labeled '10' and '11'. A single tick mark is placed exactly halfway between 10 and 11.