


# GigaSpire Mesh Blast u4m Setup

## Connect the Mesh BLAST u4m to your GigaSpire Router

1. Make sure that your existing GigaSpire Router is plugged in with active internet service.
2. Plug one end of a cat5 cable into one of the yellow ethernet ports on the GigaSpire Router, and the other into the WAN port on the Mesh BLAST.

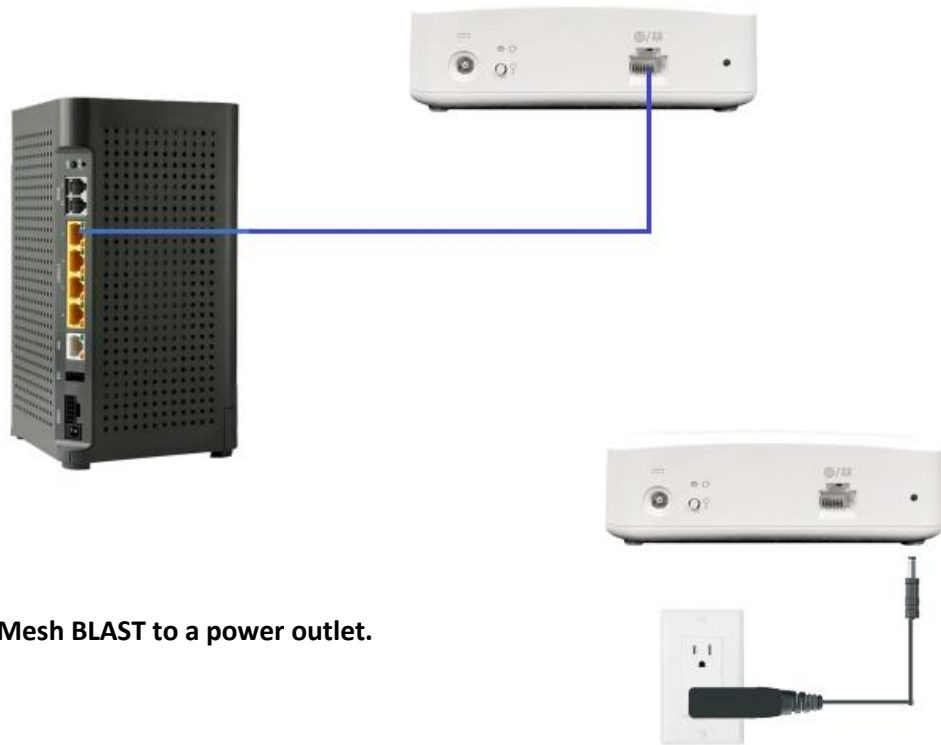

3. Plug the Mesh BLAST to a power outlet.

4. Pairing will start automatically. This process can take up to 5 minutes. Pairing is complete when both units show a solid cyan color (light blue) light.



5. **Disconnect the Mesh BLAST from the GigaSpire and move it to a new location that is 1 to 2 rooms away.**
6. **Plug Mesh BLAST into power.**
7. **When the light on the back of the Mesh BLAST is solid blue again, the system is ready.**

