

*Protection and Installation Tools


Protective equipment

1. Safety shoes
2. Safety helmet
3. Safety gloves
4. Safety goggles
5. Emergency first-aid kit (if any)



Preparation for tools and materials:

1. 2 x ladders(1.5 metres or more) or make on-site scaffolding
2. Hammer drill + Phillips Screwdriver Bits + Twist Drill bit (sometimes need to make holes in the metal)
3. Rotary Hammer + @14, 12, 10mm drill bit (For concrete drilling, the length of the hole should be 100mm)
4. Laser level, tape measure
5. Rubber mallet, hammer
6. 2 sets of Allen wrench (full specification)
7. Pliers, spanner
8. Marker, pencil
9. Sealant and glue gun
10. Scissors, art knife

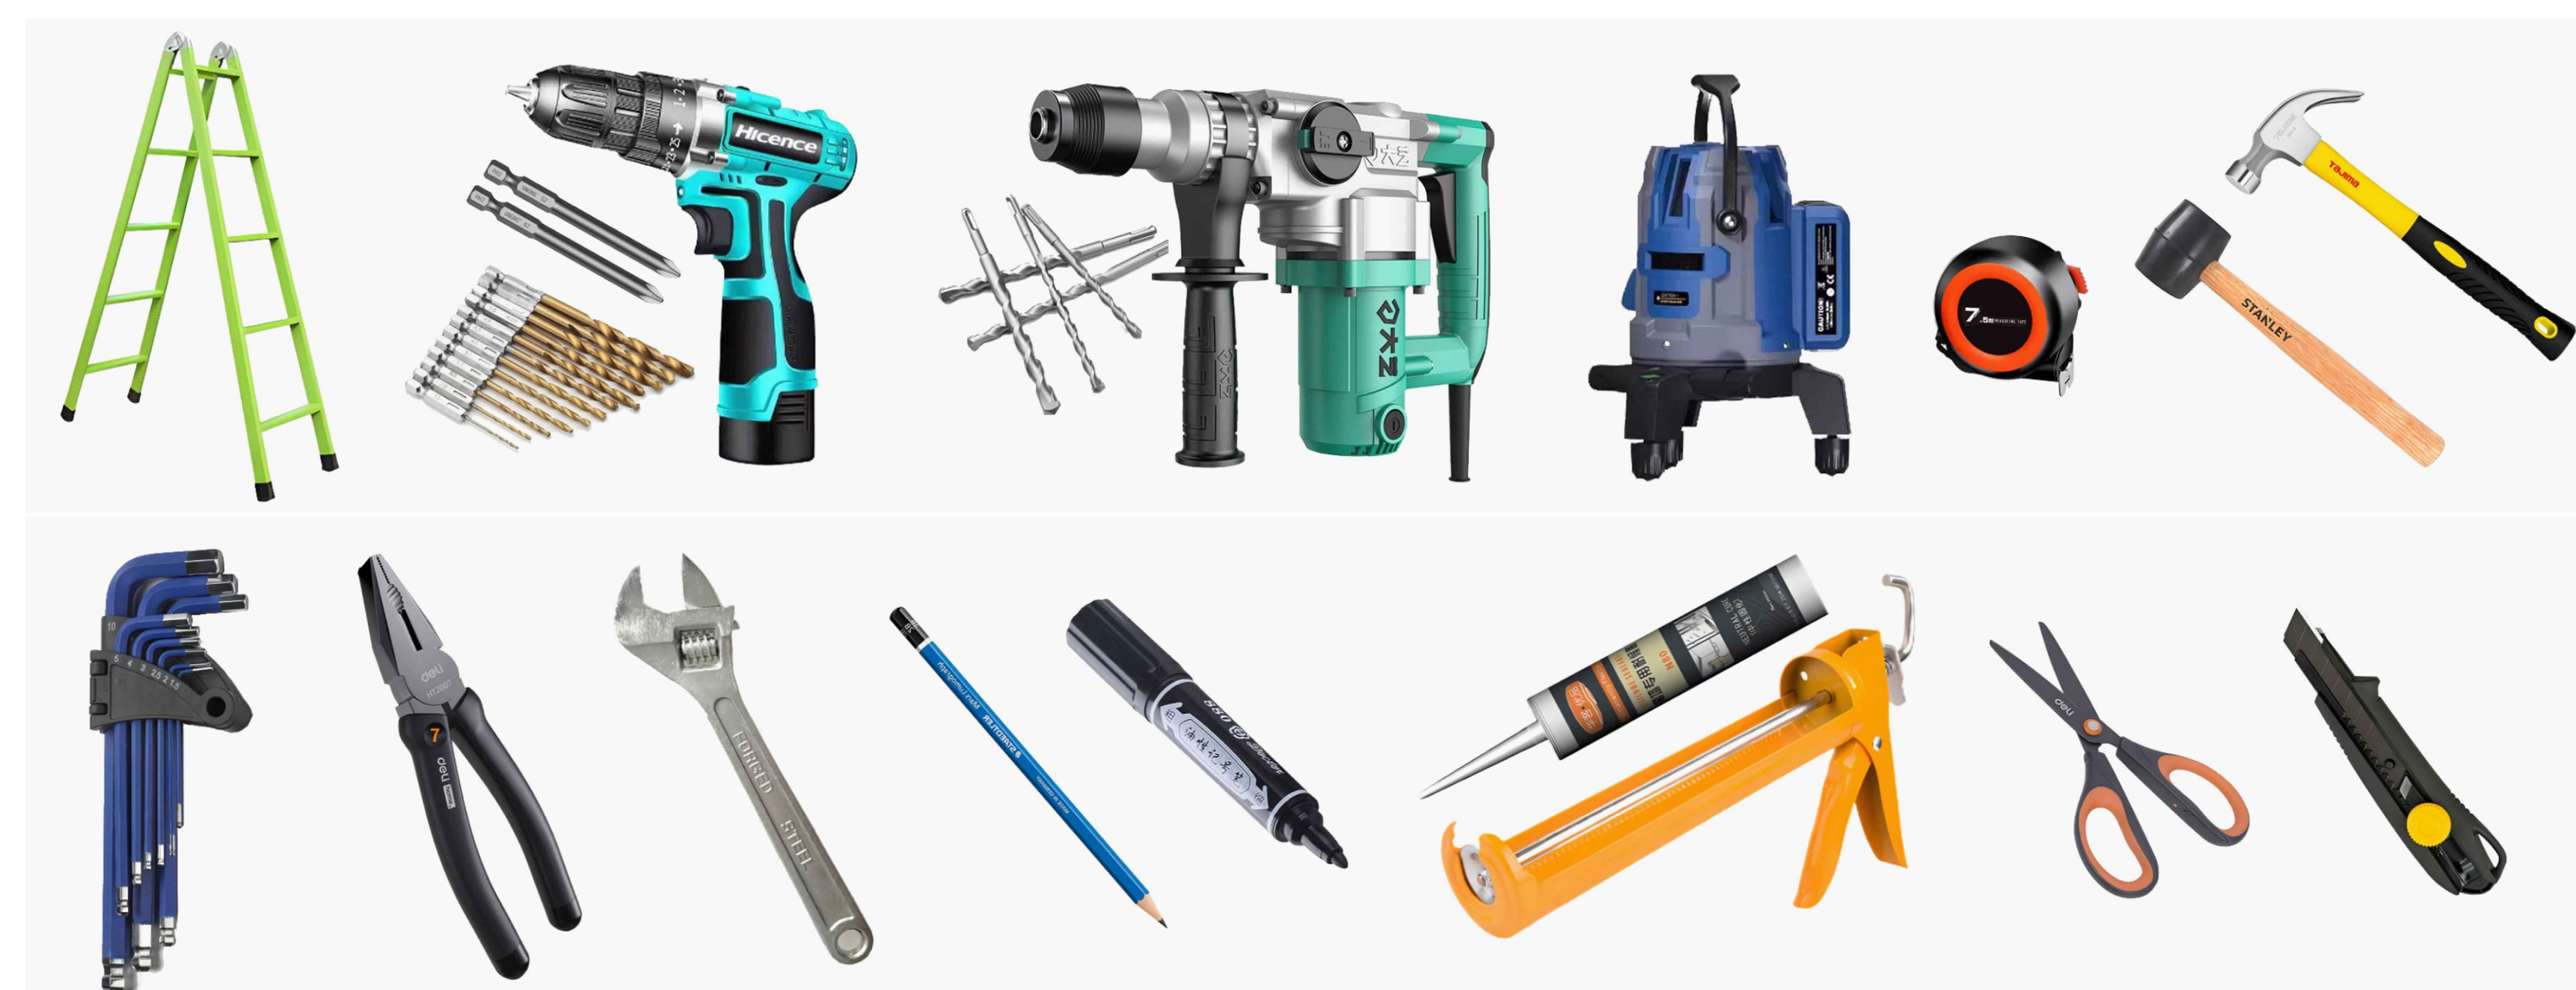

*Notes before installation

1. Installation requires 3~4 persons.
2. Expansion bolts (suitable for concrete floors) come as standard.
 - a. If the site is WPC based floor or steel plate based floor, you need to buy suitable screws locally in order to fasten the column base.
 - b. If your ground is soil foundation, it is recommended to make respective concrete foundation underneath each column. The best specification for each base would be 500x500x500mm.
3. Before anchor bolting the pergola to the ground, make sure to use gradienter and tape measures to check leveling, squareness and diagonal to ensure that the pergola is perpendicular, so as to facilitate the installation of add-ons (e.g. sliding door).
4. Please pay attention to the safety when you use the power tools, scissors or razor blades.
5. According to the compliance of the local labour protection, do wear helmets, gloves and other protective gear.
6. Please be careful as some of the profiles are heavy-duty and have sharp cutting edges.

*Safety Warning

- a. Do not install the pergola in bad weather conditions such as wind or rain.
- b. When connecting the wires, please switch off the main power supply to avoid electric shock.
- c. Wear safety helmet and other protective gears according to local labour protection compliance.
- d. When installing the product, children are advised to stay away.
- e. Do not approach the pergola during storms or typhoons.
- f. Ensure that there are no hidden objects such as cables and water pipes underground before positioning the columns

General Advice

- a. Check the number of profiles and fittings before assembly and use them according to the list of profile fittings for high-efficient assembly.
- b. Put small pieces such as screws into a container to avoid loss.
- c. Regularly clean leaves, snow or other debris off the pergola.

Maintenance and Repair

- a. To clean the pergola, use a mild detergent and rinse with water. Do not use corrosive products like acetone or acidic to clean the surface of the aluminium profile.

Product Specifications

*Please check according to the type of product you purchased. Ignore this request if some particular add-ons are not included in your order.

*Power supply plug is not included as our standard supply and should be sourced locally by customer.

*Our company only supply a certain length of wire (if pergola is too far away from the power supply, extended wires need to be sourced locally) Please calculate the power of each system purchased according to the below table to determine the specifications of the wire need to source locally.

0 ~ 1200W please use 1.0mm² * 3 core cable / 0 ~ 2500W please use 1.5mm² * 3 core cable

Model	Product Name	CSA (mm ²)* (core types)	Voltage	Power	Supplied Cable Length
Pergo-T700	Louvre Motor	0.75mm ² *2	24V	72W / Unit	5m
	LED Strip Lights	0.75mm ² *2	120V/220V	10W / Meter	5m
	Controller Box	0.75mm ² *3	100-240V	36W / Unit	6m
Pergo-T600 (including junction box: only for items with low voltage)	Louvre Motor	1mm ² *2	24V	30W / Unit	5m
	LED Strip Lights	1mm ² *3	24V	6W / Meter	5m
	RGB Ambient Lights	1mm ² *4	24V	6W / Meter	5m
	Blind Motor	1mm ² *4	120V/220V	156W / Unit	5m
	Circuit Box	1.5mm ² *3	/	200W/350W/ 450W/600W	/
	Ceiling Fan w/ Lights	1mm ² *2	120V/220V	83W / Unit	0.5m
	Ceiling Fan w/o Lights	1mm ² *2	120V/220V	35W / Unit	0.5m
Pergo-T520	Louvre Motor	0.75mm ² *3	100-240V	66W / Unit	5m
	LED Strip Lights	0.75mm ² *2	120V/220V	10W / Meter	Length fit
	RGB Ambient Lights	0.75mm ² *4	24V	10W / Meter	Length fit
	RGB Light Strip Transformer	0.75mm ² *3	100-240V	156W / Unit	5m
Pergo-T500	Louvre Motor	0.75mm ² *3	24V	36W / Unit	Length fit
	LED Strip Lights	0.75mm ² *2	120V/220V	10W / Meter	5m
	Controller Box	0.75mm ² *3	100-240V	36W / Unit	6m
PVC-S810	Motor	1mm ² *4	110V/230V	490W / Unit	0.5m
	LED Strip Lights	0.75mm ² *3	120V/220V	10W / Meter	Length fit
	Controller	1mm ² *3	110V/230V	500W / Unit	3m

Model	Product Name	CSA (mm ²)* (core types)	Voltage	Power	Supplied Cable Length
Pergo-R500	Louvre Motor	0.75mm ² *4	110V/230V	300W / Unit	Length fit
	LED Strip Lights	0.75mm ² *2	24V	8W / Meter	Length fit
	Controller Box	1mm ² *3	24V	400W / Unit	3m
Pergo-T300	Louvre Motor	1mm ² *2	24V	36W / Unit	Length fit
	LED Strip Lights	1mm ² *2	24V	10W / Meter	Length fit
	RGB Ambient Lights	1mm ² *4	24V	10W / Meter	Length fit
	Controller Box	1mm ² *3	110V/230V	300W / Unit	5m
Pergo-T265	Louvre Motor	0.75mm ² *2	24V	36W / Unit	Length fit
	LED Strip Lights	0.75mm ² *2	24V	10W / Meter	Length fit
	RGB Ambient Lights	0.75mm ² *4	24V	10W / Meter	Length fit
	Controller Box	1.5mm ² *3	110V/230V	500W / Unit	5m
Pergo-M8	Louvre Motor	/	24V	30W / Unit	Length fit
	LED Strip Lights	/	24V	6W / Meter	Length fit
	Blind Motor	1mm ² *3	120V/220V	156W / Unit	5m
	Controller	0.75mm ² *3	100V-240V	300W / Unit	5m
Pergo-M6 Pro	Louvre Motor	/	24V	50W / Unit	Length fit
	LED Strip Lights	/	24V	3W / Meter	Length fit
	RGB Ambient Lights	/	24V	3W / Meter	Length fit
	Controller	0.75mm ² *3	100V-240V	300W / Unit	5m

Product Specifications

*Please check according to the type of product you purchased. Ignore this request if some particular add-ons are not included in your order.

*Power supply plug is not included as our standard supply and should be sourced locally by customer.

*Our company only supply a certain length of wire (if pergola is too far away from the power supply, extended wires need to be sourced locally) Please calculate the power of each system purchased according to the below table to determine the specifications of the wire need to source locally.

0 ~ 1200W please use 1.0mm² * 3 core cable / 0 ~ 2500W please use 1.5mm² * 3 core cable

Model	Product Name	CSA (mm ²)* (core types)	Voltage	Power	Supplied Cable Length
Pergo-E Pergo-Y Pro Bio-Sila Pro	Louvre Motor	/	24V	50W / Unit	Length fit
	LED Strip Lights	/	24V	2.7W / Meter	Length fit
	Controller	0.75mm ² *3	24V	150W / Unit	5m
Pergo-X Pro+ Pergo-V Pro+ Bio-Mosa Pro+ Bio-Mira Pro+	Louvre Motor	/	24V	50W / Unit	Length fit
	LED Strip Lights	/	24V	3W / Meter	Length fit
	RGB Ambient Lights	/	24V	3W / Meter	Length fit
	Controller	0.75mm ² *3	100V-240V	150W / Unit	5m
Blinds	Blind Motor	0.75mm ² *3	120V/220V	170W / Unit	5m
Electric Heater	AH18CCR	1.5mm ² *3	220V	1800W / Unit	1.8m
	AH15CCR	1.5mm ² *3	120V	1500W / Unit	1.8m
	AH24CCR	1.5mm ² *3	220V	2400W / Unit	1.8m
Electric Fan	Ceiling Fan w/ Lights	1mm ² *2	120V/220V	83W / Unit	0.5m
	Ceiling Fan w/o Lights	1mm ² *2	120V/220V	35W / Unit	0.5m