Pre-flight Assembly Instructions

The English College in Prague: ASGARD-XV Experiment 14

Date: 2026-04-12

Author: Šimon Donovan
Review: Jiří Dobeš

Sensor module (on the outside of the gondola)

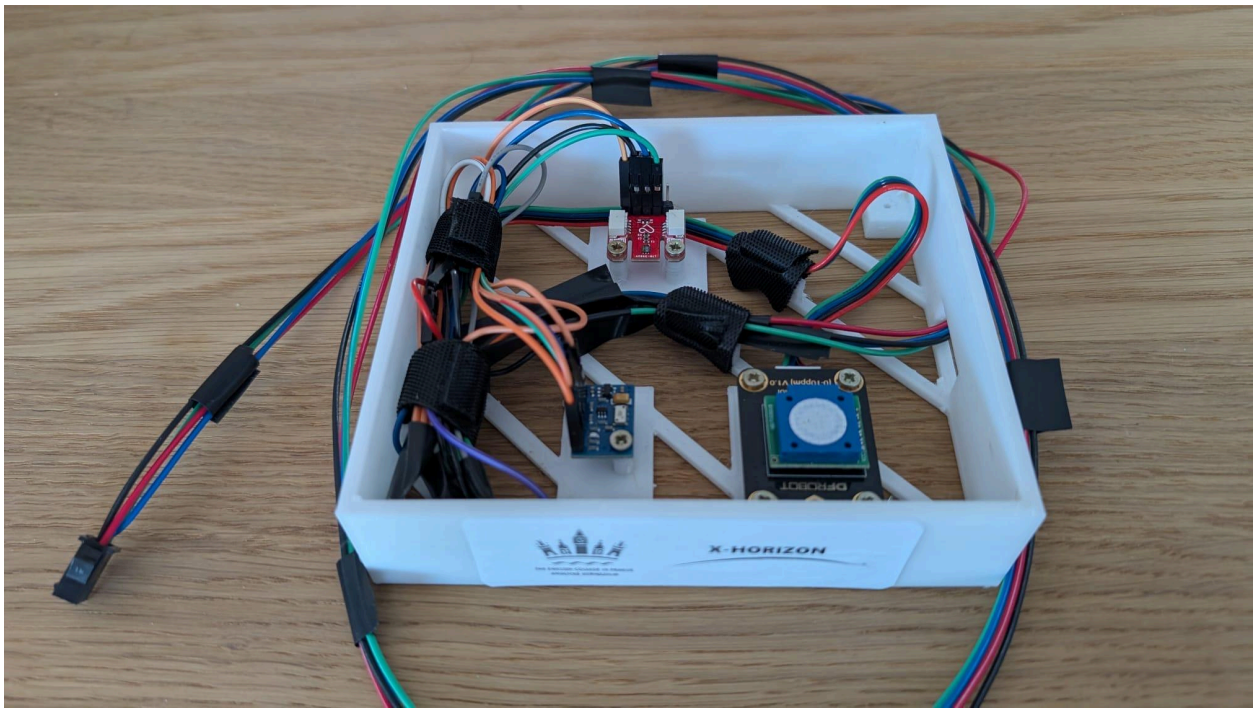

In the image above is the module with the sensors, which will be connected to the exterior of the gondola. **The module must be mounted onto the bottom of the gondola in such a way that the sensors are facing downwards.** This is to prevent direct sunlight from reaching the sensors. In the image above, the sensors are all facing upwards.

The ozone sensor is the largest sensor in the lower right corner of the image. It is the most fragile sensor. **<u>Please do not test the sensors in a vacuum, as this could damage them.</u>**

The connector wound around the outside of the 3D printed casing and ending on its left side is the connector that will be plugged into the part of the circuit inside the gondola.

Interior circuitry

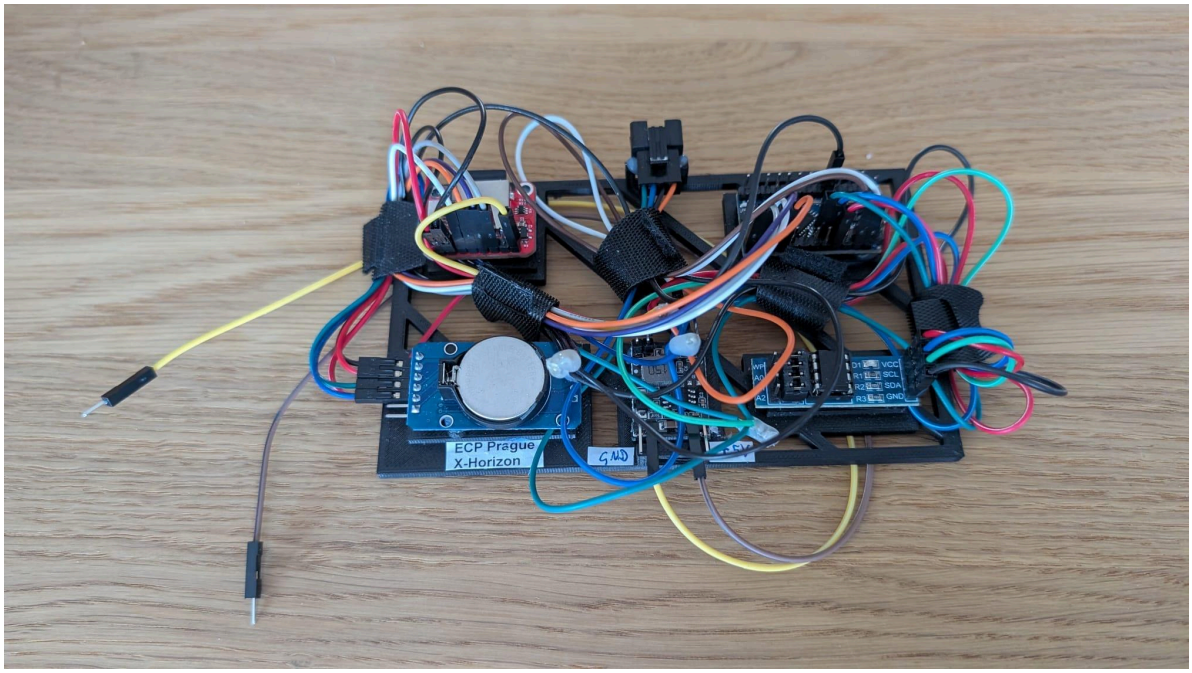

In the image above is depicted the interior section of the circuitry. This section will go inside the gondola. From the perspective of the camera, in the center of the upper side of the 3D printed frame lies the outlet into which the aforementioned connector from the sensor module must be plugged in. The Arduino is located in the upper right corner of the frame, again from the perspective of the camera.

The 5V battery power is connected to the +/- terminals labeled accordingly.