

4.
Cement rear axle D<sub>0</sub>
and rear wheels D<sub>7</sub>

C29, together.


Cement rear suspension D(3)-(4) to the chassis frame, cement rear axle to the rear suspension.

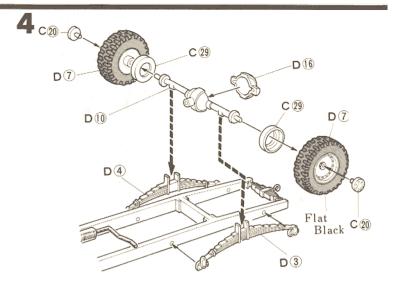


5.
Cement all parts to the right and left chassis frame.

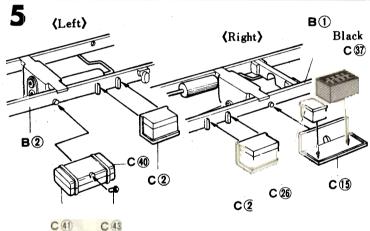

6.
Cement drive shaft D(2)
(3)-(3) as shown.

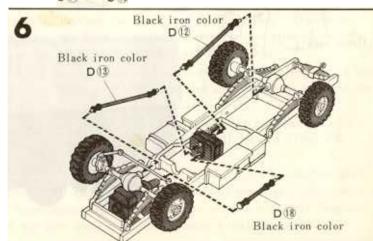

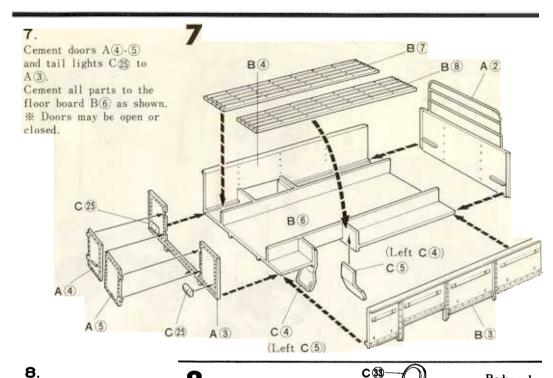

8.
Use cement very sparingly, cement the glass in the windshield.
Cement doors to the cab, doors may be open or

closed.

Cement all parts to the cab A(6).


Q.
Cement seats, lever and dashboard to D(I), cement steering wheel to the dashboard.
The driver may be painted and placed on

the seat.

Lightly cement the edge for the window in B(5) and press in window E(2)

Cement D①, B⑤ to the A⑥.

Cement spare tire D<sub>8</sub>. brackets C<sub>6</sub> to B<sub>5</sub>.

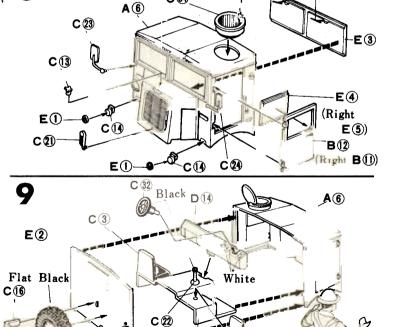

D(7)

**B**(5)

D(8)

C® Brown (See st n 12)

C 34

Body color