

# DS-3E0518P-E/M 16 Port Gigabit Unmanaged PoE Switch



- 16 × Gigabit PoE port, 2 × Gigabit SFP fiber optical port
- IEEE 802.3at/af standard
- IEEE 802.3, IEEE 802.3u, and IEEE 802.3x standard
- 6 kV surge protection for PoE ports
- PoE power management
- Gigabit network access
- Wire-speed forwarding
- Store-and-forward switching
- Solid high-strength metal shell



## Specification


• Specification					
Model		DS-3E0518P-E/M			
General	Shell	Metal material			
	Net Weight	2.50 kg (5.51 lb)			
	Gross Weight	3.57 kg (7.87 lb)			
	Dimensions (W × H × D)	440 mm × 44 mm × 220.8 mm (17.3" × 1.7" × 8.7")			
	Operating Temperature	0 °C to 45 °C (32 °F to 113 °F)			
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)			
	Operating Humidity	5% to 95% (no condensation)			
	Relative Humidity	5% to 95% (no condensation)			
	Power Supply	100-240 V AC, 50/60 Hz, Max. 2.5 A;			
	Max. Power Consumption	150 W			
	Power Consumption in Idle	25 W			
	Installation Mode	Rack (equipped with mounting ears)			
	Surge Protection	6 kV			
	Ports	16 × Gigabit PoE port,2 × Gigabit fiber optical port			
	MAC Address Table	8 K			
Network Parameters	Switching Capacity	36 Gbps			
raiailleteis	Packet Forwarding Rate	26.79 Mpps			
	Internal Cache	4.1 Mbits			
	PoE Standard	IEEE 802.3af;IEEE 802.3at;			
Вог Вошея	PoE Power Pin	End-span: 1/2(+), 3/6(-)			
PoE Power	PoE Port	PoE: Ports 1 to 16			
Supply	Max. Port Power	30 W			
	PoE Power Budget	125 W			
Approval	EMC	FCC (47 CFR Part 15, Subpart B),CE-EMC (EN 55032: 2015+A11: 2020, EN IEC			
		61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN			
		55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020),RCM (AS/NZS CISPR 32:			
		2015)			
	Safety	UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second			
	,	Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)			
		CE-RoHS (201165EU);			
	Chemistry	WEEE (201219EU);			
		Reach (Regulation (EC) No.19072006)			

### Available Model

DS-3E0518P-E/M



### Dimension

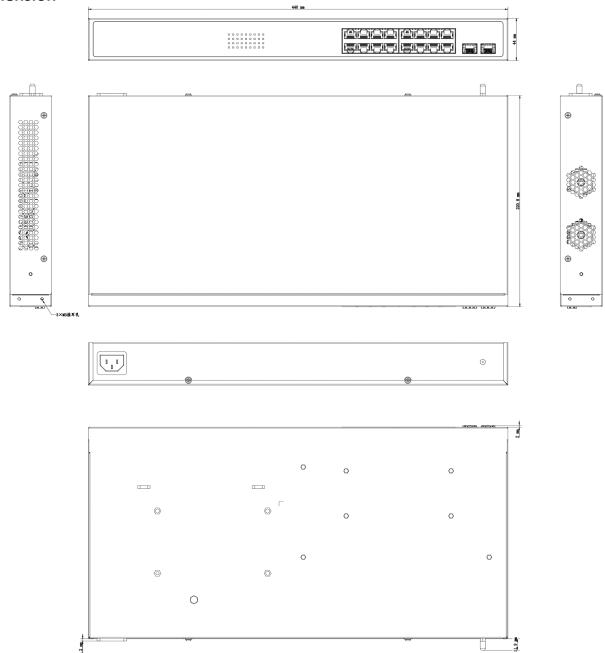



#### Accessory

#### Optional

HK-SFP-1.25G-20-1550	HK-SFP-1.25G-20-1310	HK-SFP-1.25G-1310-DF-MM	HK-SFP-1.25G-20-1310-DF
SFP Module	SFP Module	SFP Module	SFP Module
The second second		ARABANA, TOTAL CONTROL OF THE PARTY OF THE P	The language of the language o

**Headquarters**No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ





