

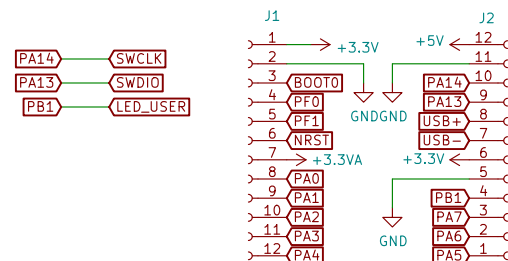
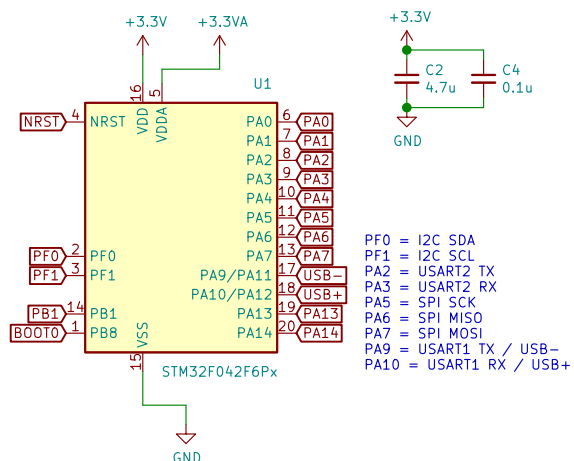








STM32 Microcontroller



Headers

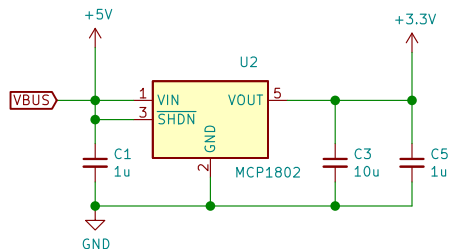

USB and Power Shenanigans

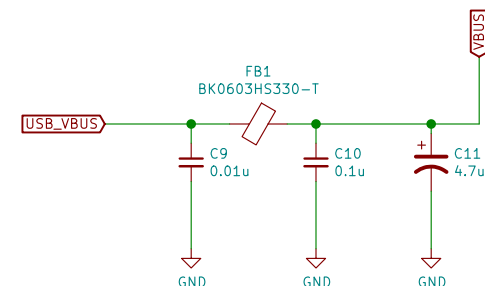

See: FTDI AN 146, Section 2.4.4
"Ferrite bead use and placement - USB peripheral devices"
(FTDI makes that third cap electrolytic in their schematic)
Make the bead whatever fits in an 0805

Sheet: /
File: stm32f042_board.sch

Title: STM32F042 Dev Board

Size: USLetter Date: 2020-11-17
KiCad E.D.A. kicad (5.1.7-0-10_14)

Rev: 1
Id: 1/1