

BLUESTORM ONLINE UPS-RACK MODE

Power range: 3KVA



Features


- Rack/Tower convertible design
- Online double conversion with full digital control
- Wide input voltage range: 110~300Vac
- Input power factor 0.99 with PFC
- Selectable output voltage: 208/220/230/240Vac
- Smart charger design for optimized battery performance
- Maximum charging current can be expanded to 12A (Long run unit)
- Emergency power off function (EPO)
- ECO mode operation for energy saving
- Generator compatible
- Hot-Swappable battery design
- Cold start
- Intelligent fan speed regulation
- Load segment settable (Optional)
- Versatile LCD human-computer interface
- Multiple communication interface: RS232 (USB/EPO/Dry contact /SNMP card optional)
- Multiple protection function: short-circuit, overload, overheat, battery overcharge and overdischarge, output low voltage and fan fault alarm



Multifunctional bracket



The LCD panel can be rotated

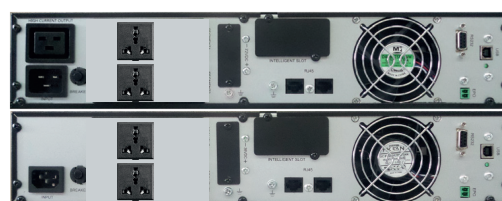

Dry contact card



SNMP

BLUESTORM ONLINE UPS

Technical Specifications:

MODEL		BS-3K-RM
Capacity		3000VA/ 2700W
INPUT		
Nominal voltage		208/220/230/240Vac
Input voltage range		110~300Vac (176~280Vac @ 100% load)
Frequency range		40~70Hz (50/60Hz Auto-Sensing)
Power factor		≥0.99
OUTPUT		
Output voltage		208/220/230/240Vac
Power factor		0.9
Voltage regulation		±1%
Output frequency	Line Mode	46~54Hz or 56~64Hz
	Bat. Mode	(50/60±0.1%)Hz
Crest factor		3:1
Harmonic distortion (THDv)		≤3% Linear load
		≤5% Non linear load
Transfer time	AC mode to Bat.Mode	0ms
	Inverter to Bypass	4ms (Typical)
Output waveform		Pure Sinewave
EFFICIENCY		
AC mode		92%
Battery mode		88%
BATTERY		
Battery number		6
Capacity (Standard unit)		9Ah/12V
Typical recharging time		4 hours (to 90% of full capacity)
Charging voltage		82.2Vdc±1%
Charging current (Max)		1A
INDICATORS		
LED display		Line mode,Bat.mode,ECO mode,Bypass mode,Battery low voltage,Overload & UPS fault
LCD display		Input voltage,Input frequency,Output voltage,Output frequency,Load percentage, Battery voltage,Inner temperature& Remaining battery backup time
ALARM		
Battery mode		Beeping every 4 seconds
Battery low		Beeping every second
Overload		Beeping twice every second
Fault		Continuously beeping
PHYSICAL		
Dimension W x D×H (mm)		440 x 600 x 86.5
Net weight (kg)		26
ENVIRONMENT		
Operating temperature		0°~40°
Storage temperature		-25°~55°
Humidity range		20~95%RH @ 0~40° (Non condensing)
Altitude		<1500m,derating required when>1500m
Noise level		<50dB at 1 Meter
STANDARDS		
Safety		IEC/EN62040-1,IEC/EN 62477-1
EMC		IEC/EN62040-2,IEC61000-4-2,IEC61000-4-3,IEC61000-4-4,IEC61000-4-5,IEC61000-4-6,IEC61000-4-8

Specifications are subject to change without prior notice.
When output voltage is 208Vac,need to derate to 80% of the unit capacity.