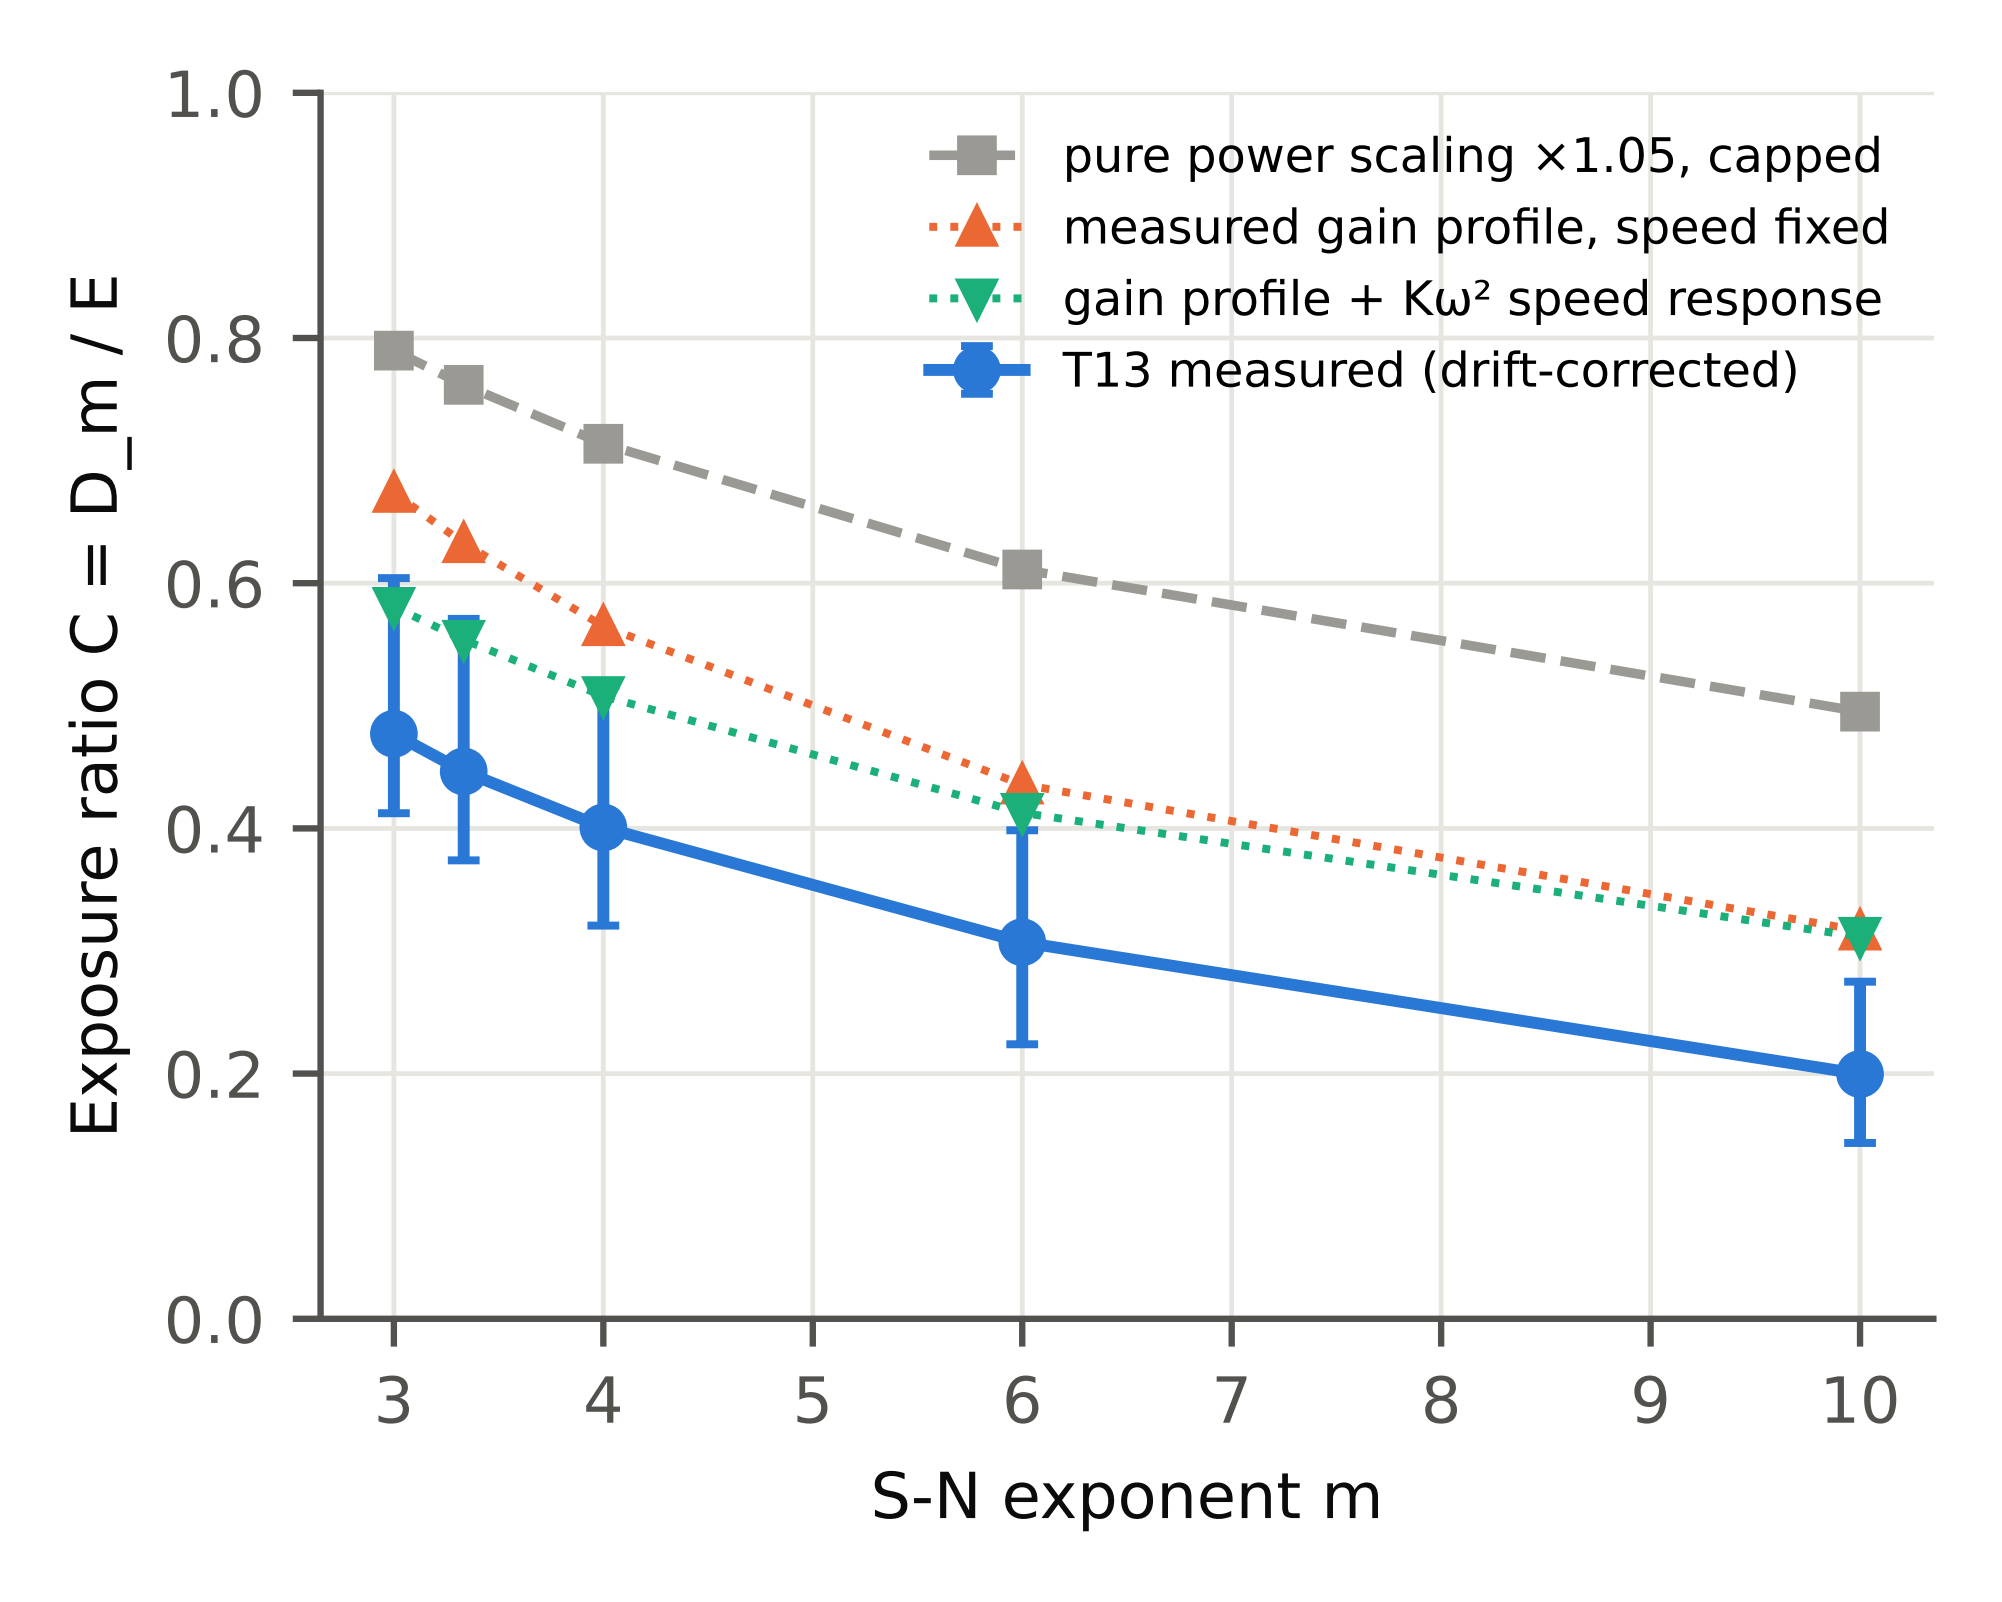
pure power scaling ×1.05, capped
measured gain profile, speed fixed
gain profile + Kω² speed response
T13 measured (drift-corrected)
Exposure ratio C = D_m / E
S-N exponent m
1.0
0.8
0.6
0.4
0.2
0.0
3
4
5
6
7
8
9
10